




7355-5

7358-8

**INCOMING SUPPLY**




**LIGHT FITTING**

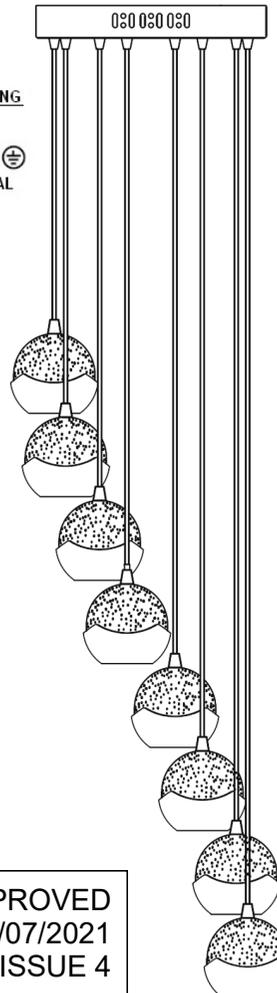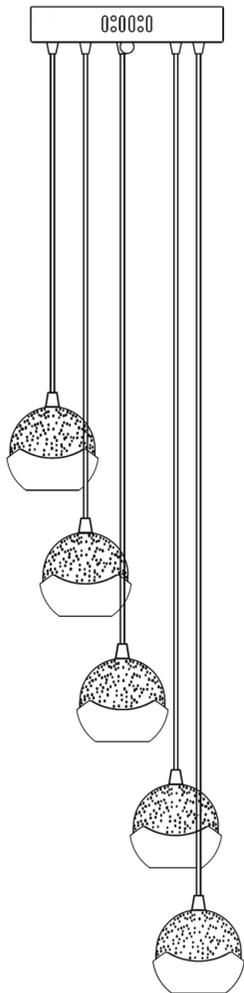

**Q.C** APPROVED  
02/07/2021  
ISSUE 4

**REPLACING THE LED:**

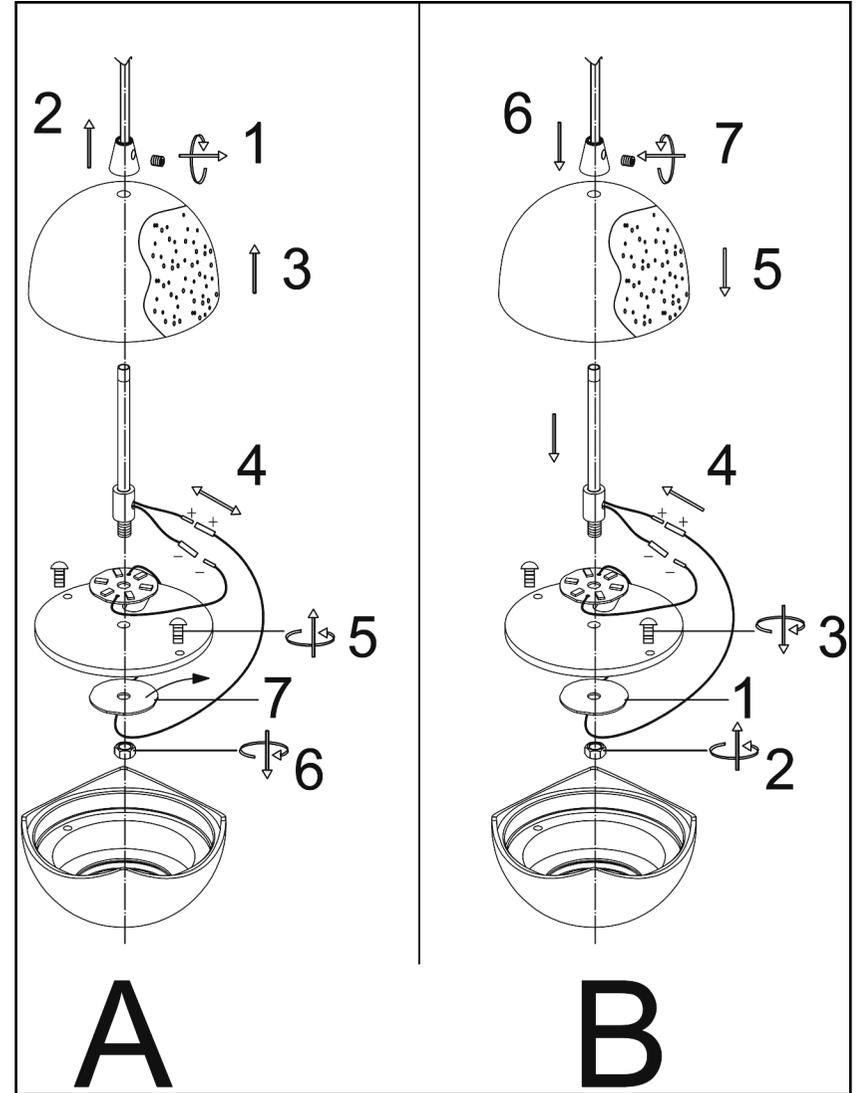

### **SAFETY INFORMATION: (Please retain for future reference)**

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 1 product and requires an Earth connection – 230 (240) Volts – 50Hz AC.
- This product must be installed in accordance with the national building regulations, if in doubt consult a competent electrician.
- Do not stare at the operating lamp .
- Do not modify or alter any product before or after installation. This may invalidate your warranty and may render the product un-safe.

### **POSITION**

- This fitting is suitable for installation in Indoor locations only .
- Ensure sufficient access to the fitting to enable safe maintenance.
- The Luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2m is not expected

### **LED INFORMATION:**

- The fitting can be dimmed using a compatible Trailing edge dimmer switch , such as a Varilight V-PRO MJP120.
- The integrated LED's are replaceable.

### **AFTERCARE AND MAINTENANCE:**

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do not use any abrasive cloths or cleaners as this may damage the product .

### **REPLACING THE LED:**

#### **WARNING:**

Before proceeding, make sure the ceiling light is switched OFF and the electricity is switched OFF at the mains supply board

#### **(A) REMOVING LED CHIP:**

1. Using a small Flat head screw driver carefully unscrew and remove the cord grip .
2. Move the metal cap upwards.
3. Carefully move the glass up to access the LED units.
4. Unclip the 2 connectors.
5. Remove the 2 fixing screws from the metal disc and place to one side .
6. Unscrew the lock nut under metal disc and lower LED unit .
7. Remove the lower LED unit ( if the upper LED unit requires replacement , first remove the metal disc from the Centre rod.)

#### **(B) REFITTING LED CHIP:**

1. If the Upper LED unit has been replaced ,fit this over the Centre rod , followed by the metal disc and the lower LED unit .
2. Re-fit the lock nut to the Centre rod.
3. Place the metal disc onto the lower section of the fitting and secure with the 2 fixing screws.
4. Re-fit the 2 connectors.
5. Carefully lower the glass onto the fitting .
6. Lower the metal cap onto the center rod .
7. Re-fit the cord grip screw and ensure it securely clamps the cable .

#### **• IF AT ALL UNSURE ABOUT REPLACING THE LED WE RECOMMEND YOU SEEK PROFESSIONAL GUIDANCE.**

- This product must be installed in accordance with the national building regulations, if in doubt consult a competent electrician.