



FOR MULTIPLE ASSEMBLY, ALL LED LIGHTS MUST BE CONNECTED IN SERIES TO A CONSTANT CURRENT 350mA LED DRIVER.

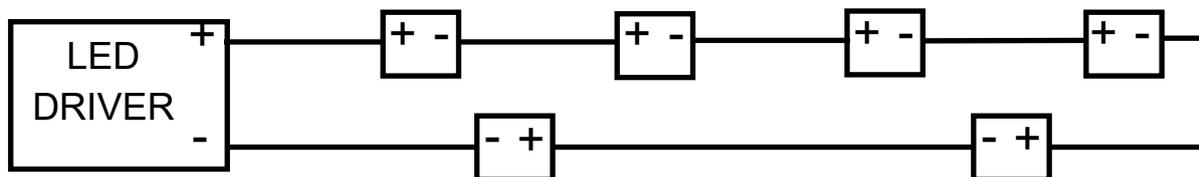


USE AS RECESSED WALL LIGHT




1

2

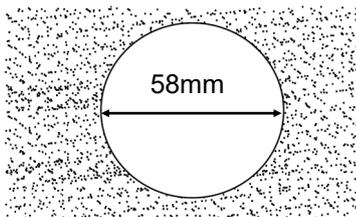


58mm



USE DRILL WITH  $\phi 58\text{mm}$   
CUT TOOL




CONNECT TO  
350mA LED DRIVER

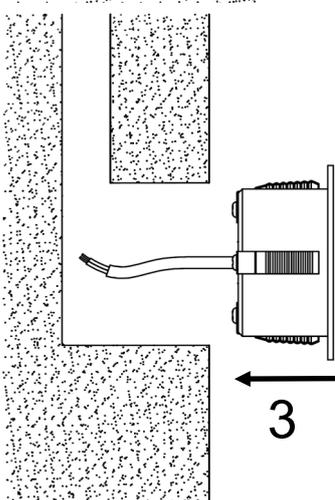

3

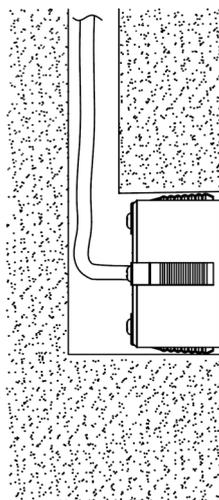


4



1

USE AS RECESSED WALL LIGHT WITH SLEEVE

2

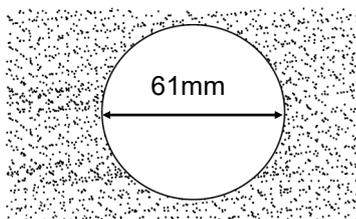


61mm


USE DRILL WITH  $\phi 58\text{mm}$   
CUT TOOL





CONNECT TO  
350mA LED DRIVER

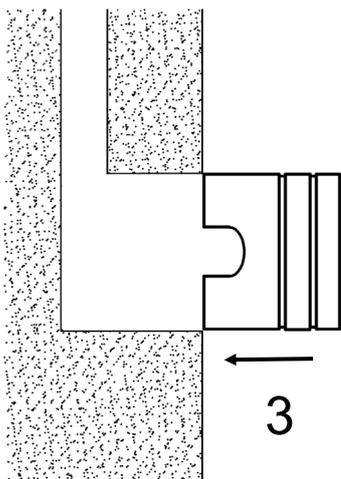

3

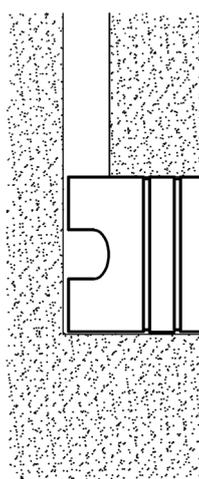

4

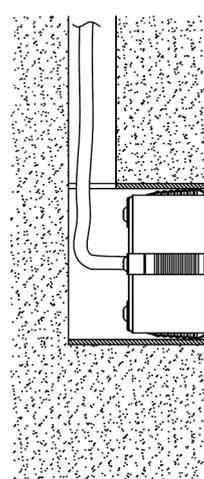

5

### **SAFETY INFORMATION: (Please retain for future reference)**

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 3 product and does not requires an Earth connection. Do not connect directly to mains supply – 230 (240) Volts – 50Hz AC, must be connected in series to a 350mA LED Driver.
- This product must be installed in accordance with the National Building Regulations, if in doubt consult a competent electrician.
- Do not modify or alter any product before or after installation. This will invalidate your warranty and may render the product un-safe.

### **POSITION:**

- The fitting is suitable for installation indoor and outdoor wall locations.
- The fitting is NOT suitable for installation in Marine locations.
- The fitting should not be installed in areas where flooding may occur
- This fitting is a IP65 rated and is suitable for installation in Zone 1 and 2.
- Zone 1 covers the area above the bath or shower up to height of 2.25 meters and carries a minimum rating of IPX4.
- Zone 2 covers an area 0.6 meters wide immediately next to, and all around zone 1, plus the area below 2.5 meters high directly over the bath or shower. Wash basins should be treated as a zone 2. The minimum rating here is IPx4.
- Ensure sufficient access to the fitting to enable safe maintenance.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2M is not expected.

### **LED INFORMATION:**

- This fitting is suitable for dimming when connected to a LED Dimmable Driver.
- The LED Module is replaceable.

### **AFTERCARE AND MAINTENANCE:**

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do not use any abrasive cloths or cleaners as this may damage the product.

