

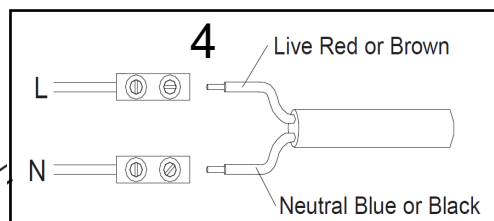


Banda Bathroom Ceiling Lamp

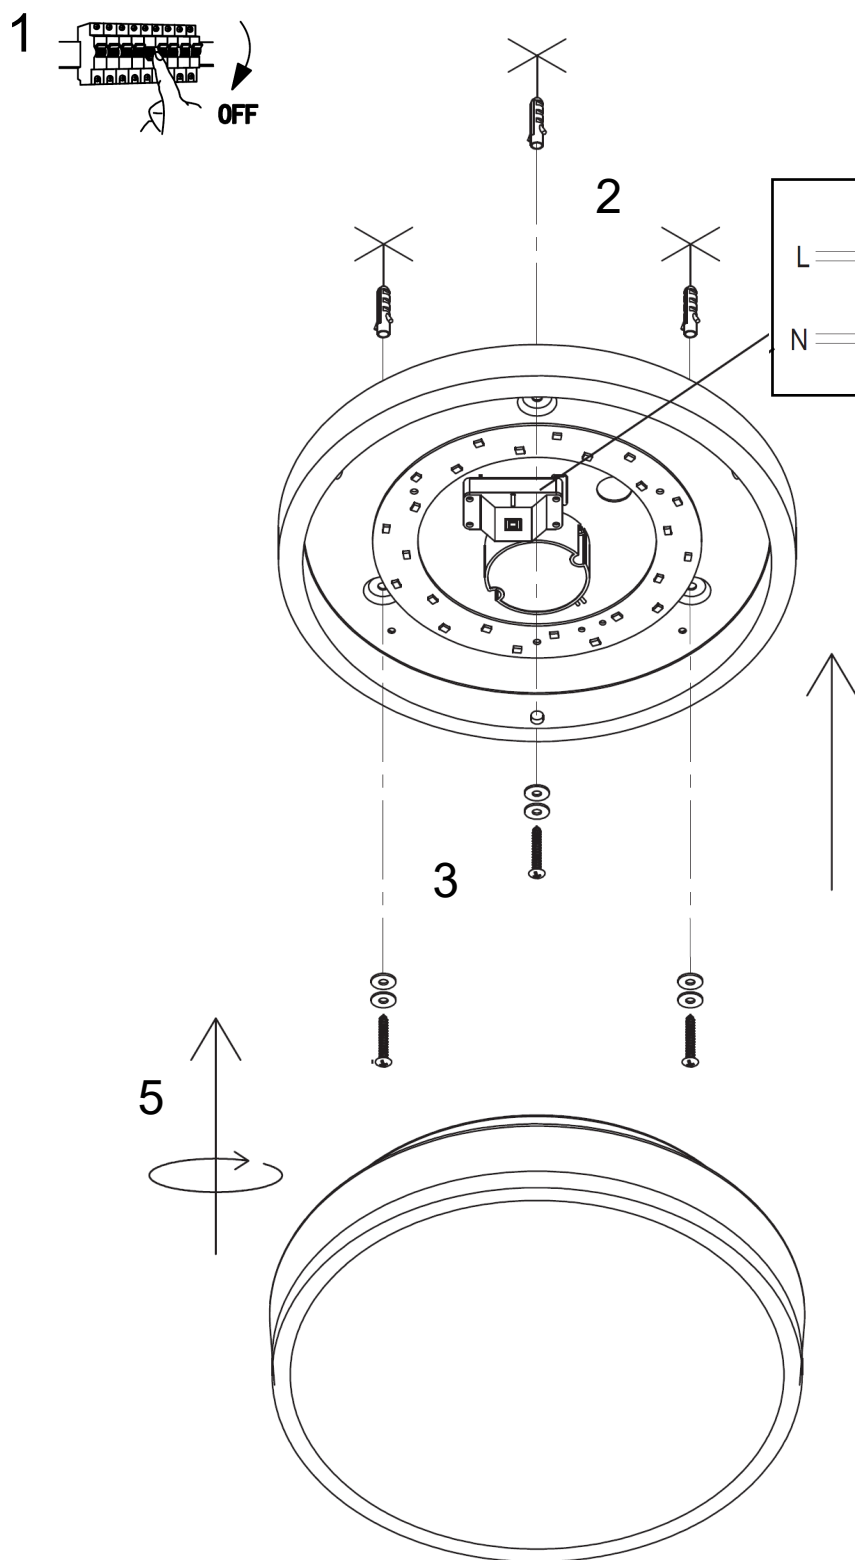

How to remove LED driver and Chips.

Once removed this product must be disposed

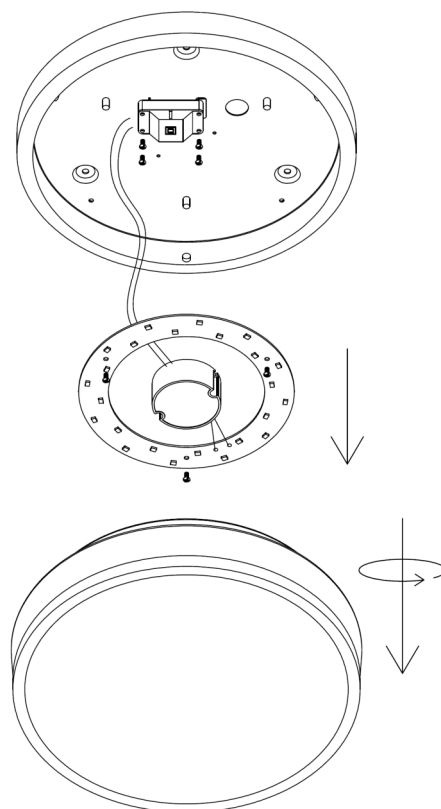

MAINS SUPPLY

LIGHT FITTING

LIVE - Possible colours : Red or Brown

NEUTRAL - Possible colours : Black or Blue

SAFETY INFORMATION: (Please retain for future reference)

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 2 product and not requires an Earth connection – 230 (240) Volts – 50Hz AC.
- This product must be installed in accordance with the national building regulations, if in doubt consult a competent electrician.
- Do not cover the light source or lamp shade.
- Do not modify or alter any product before or after installation. This will invalidate your warranty and may render the product un-safe.

POSITION


- This fitting is suitable for installation in Indoor locations only.
- Suitable for wall mount only.
- This fitting is a IP44 Rated and is suitable for installation in Zone 2.
- Zone 1 covers the area above the bath or shower up to height of 2.25 meters and carries a minimum rating of IPX5.
- Zone 2 covers an area 0.6 meters wide immediately next to, and all around zone 1, plus the area below 2.5 meters high directly over the bath or shower. Wash basins should be treated as a zone 2. The minimum rating here is IPx4.
- Where water jets are likely to be used for cleaning proposes in zone 1 or 2, the rating is a minimum IPX5
- Ensure sufficient access to the fitting to enable safe maintenance.

LAMP INFORMATION:

- Used LED lamps Only.
- Dimming of the luminaire is possible when using lamps that are dimmable.

AFTERCARE AND MAINTENANCE:

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do Not use any abrasive cloths or cleaners as this may damage the product.

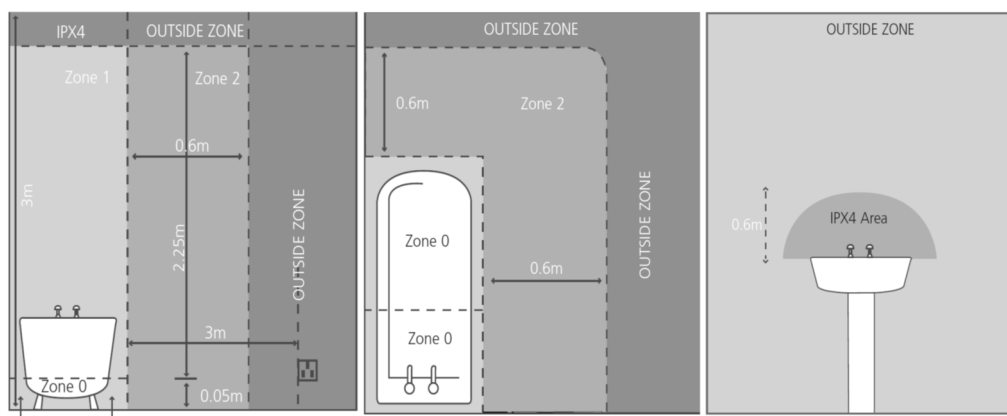

This symbol on the product indicates that this must not be disposed of with your other household waste. It is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of wasted electrical and electronic equipment. . For more information about where you can drop off your waste equipment for recycling, please contact your local city officer, your household waste disposal service or the shop where you purchased the product.