



1

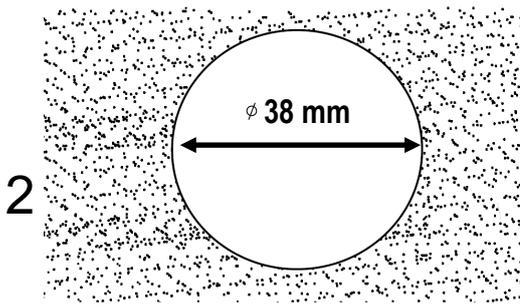


2

USE DRILL WITH  $\phi 38\text{mm}$   
CUT TOOL

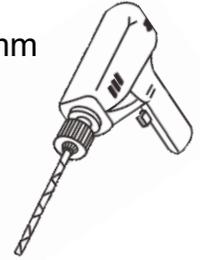


3

CONNECT TO 350mA LED DRIVER

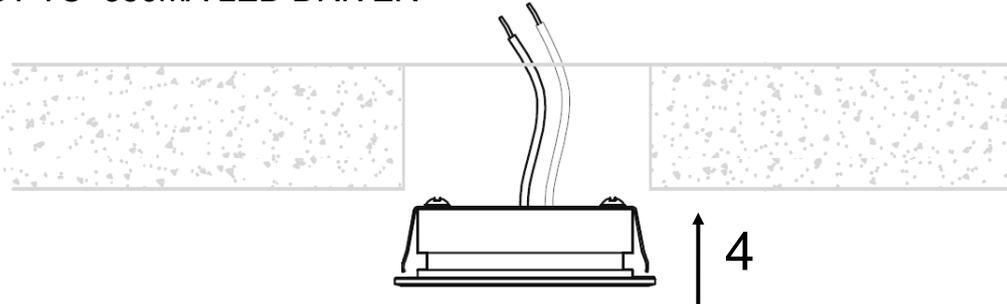


4



FOR MULTIPLE ASSEMBLY, ALL LED LIGHTS MUST BE CONNECTED IN SERIES TO A CONSTANT CURRENT 350mA LED DRIVER.

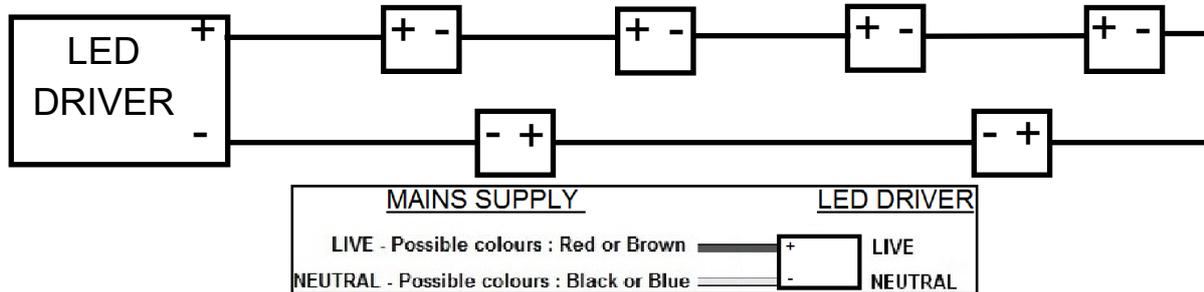

USE AS RECESSED DOWN-LIGHT

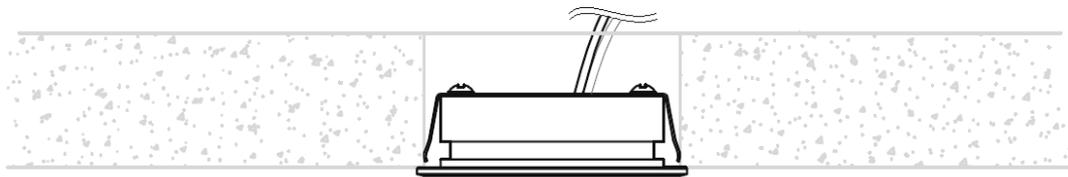

USE AS RECESSED FLOOR LIGHT

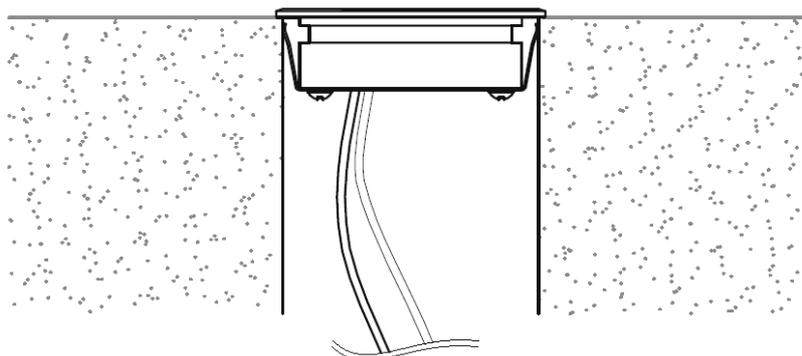

5

### **SAFETY INFORMATION: (Please retain for future reference)**

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 3 product and does not requires an Earth connection. Do not connect directly to mains supply – 230 (240) Volts – 50Hz AC, must be connected in series to a 350mA constant current LED Driver.
- This product must be installed in accordance with the National Building Regulations, if in doubt consult a competent electrician.
- Do not modify or alter any product before or after installation. This will invalidate your warranty and may render the product un-safe.

### **POSITION:**


- This fitting is a IP65 rated and is suitable for installation in Zone 1 and 2.
- Zone 1 covers the area above the bath or shower up to height of 2.25 meters and carries a minimum rating of IPX4.
- Zone 2 covers an area 0.6 meters wide immediately next to, and all around zone 1, plus the area below 2.5 meters high directly over the bath or shower. Wash basins should be treated as a zone 2. The minimum rating here is IPx4.
- The fitting is protected against jets of water from all directions, but not suitable for immersion.
- Ensure sufficient access to the fitting to enable safe maintenance.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2M is not expected.

### **LED INFORMATION:**

- This fitting is suitable for dimming when connected to a LED Dimmable Driver.
- The LED lamps are not replaceable, when the lamps reach the end of their life the whole luminaire shall be replaced.

### **AFTERCARE AND MAINTENANCE:**

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do not use any abrasive cloths or cleaners as this may damage the product.

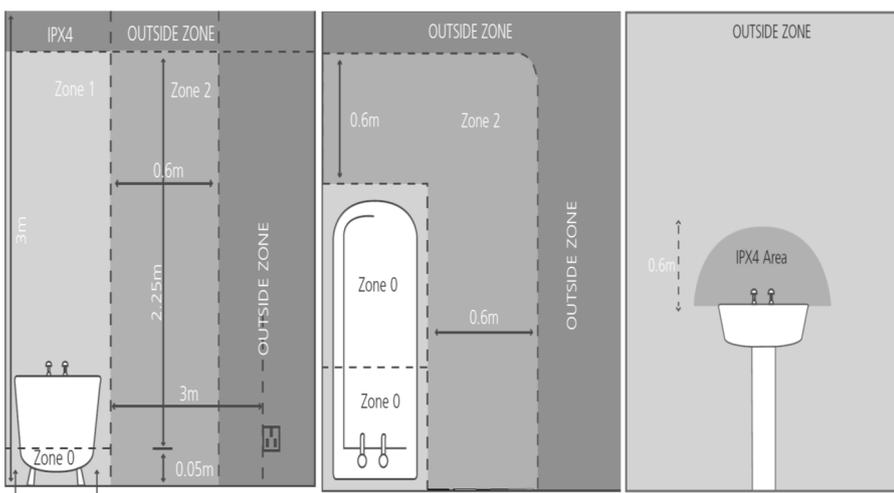

**EAC UK CA CE**



**Q.C** APPROVED  
9/12/2022  
ISSUE 4