




- 1- Switch of the mains power supply, and clean the surface required before start installation.




- 2- Make sure during installation you do not bend the LED strip as shown in the picture below, as this could damage on the product.

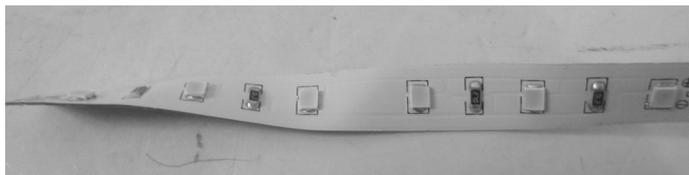

- 3- Remove the double-side adhesive release paper from the back side of the flexible LED Strip.

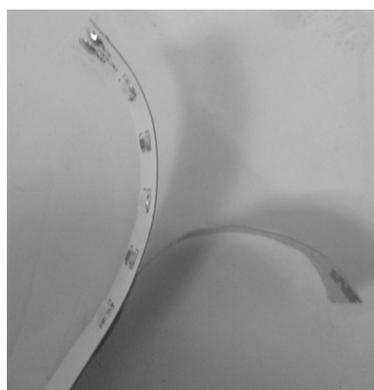

- 4- Stick the LED Strip to the required surface.

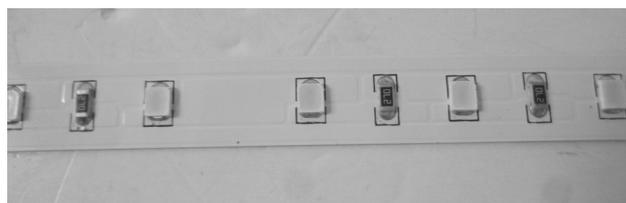


- 5- If the product needs to be cut for a specific required length, only cut where the “scissor” symbols is shown.



- 6- To extend length or connect small lengths of the LED Strip, use Searchlight in line connectors LST-CON1 or LST-CON3.




- 7- Make sure the connector pins make correct contact with the corresponding polarities of the LED Strip, (+/+), (-/-).

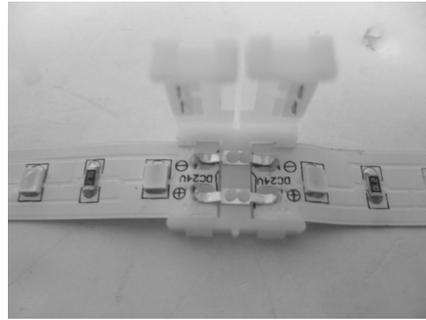


- 8- To connect two LED Strip when installation is required to go around corners use Searchlight corners connectors LST-CON2 or LST-CON4.



- 9- After fixing the LED Strip to the install surface, connect the power cord to the output power adaptor (LED Drivers (not supplied)). Red wire connect to the positive end(+) and black wire connect to the negative end(-).

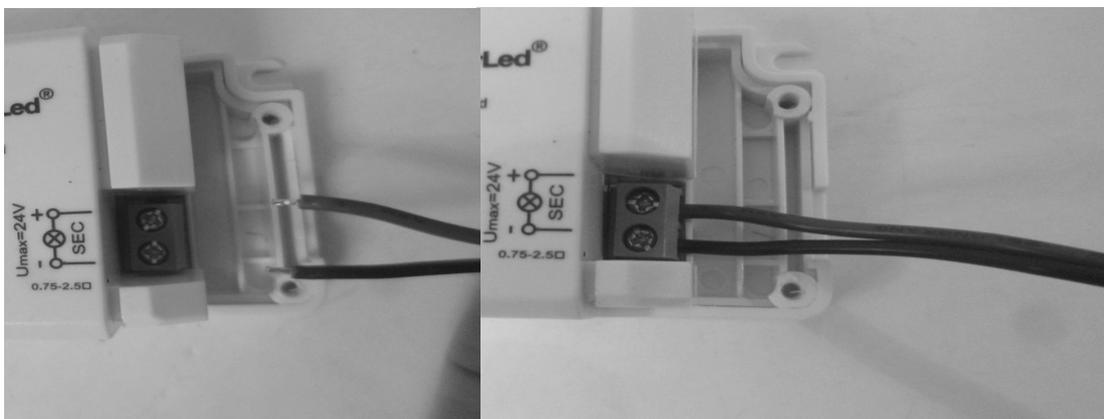

- 10- Switch on the mains power supply and test the LED Strip.



SAFETY INFORMATION: (Please retain for future reference)

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 3 product and does not requires an Earth connection. Do not connect directly to mains supply – 230 (240) Volts – 50Hz AC, must be connected to a 24V LED Driver at least 75W.
- This product must be installed in accordance with the National Building Regulations, if in doubt consult a competent electrician.
- Do not modify or alter any product before or after installation. This will invalidate your warranty and may render the product un-safe.
- Do not touch or press the LED surface during installation and transportation.

POSITION:

- The fitting is suitable for installation indoor locations only.
- Do not install the product under the Sun light.
- This product is not suitable for bathrooms installations.
- Ensure sufficient access to the fitting to enable safe maintenance.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2M is not expected.

LED INFORMATION:

- This fitting is suitable for dimming when connected to a LED Dimmable Driver.
- The LED lamps are not replaceable, when the lamps reach the end of their life the whole luminaire shall be replaced.

AFTERCARE AND MAINTENANCE:

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.

