

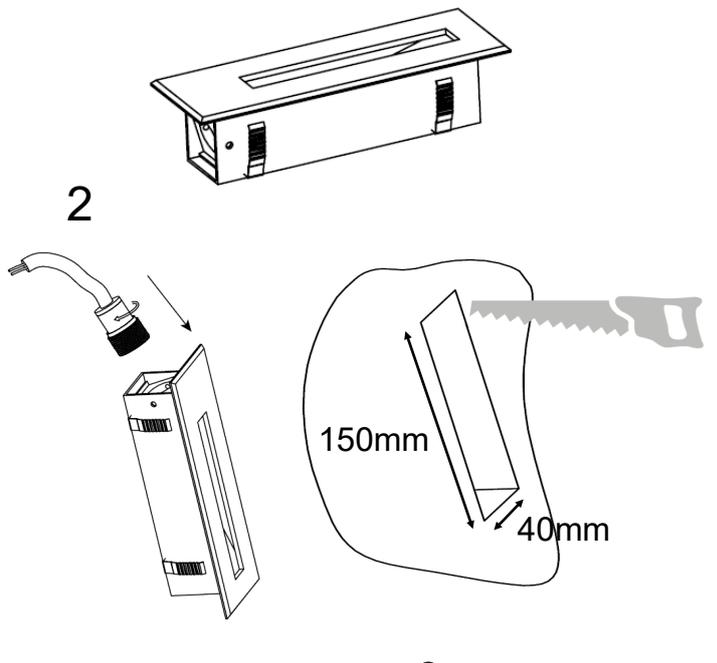


FOR USE WITH SEARCHLIGHT ITEMS
IPR-WRW
IPR-WRSN
IPR-WRCP



FOR USE WITH SEARCHLIGHT ITEMS
IPR-WSLW
IPR-WLSLN
IPR-WSLCP

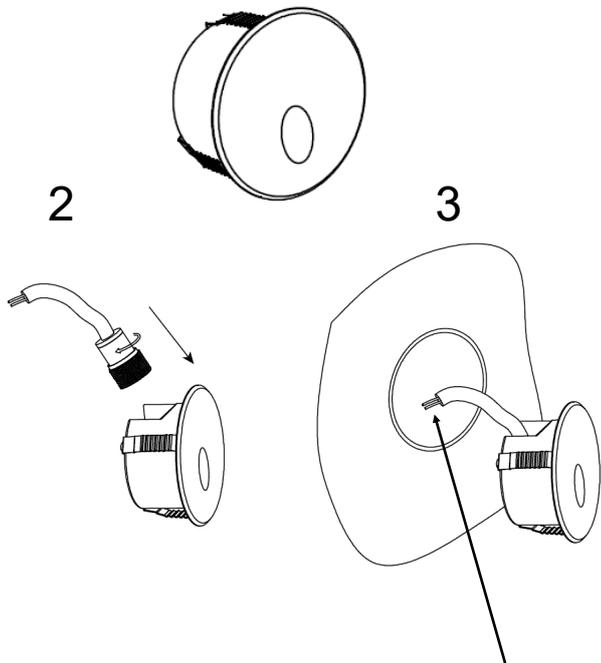




CONNECT TO A 350mA CONSTANT CURRENT LED DRIVER

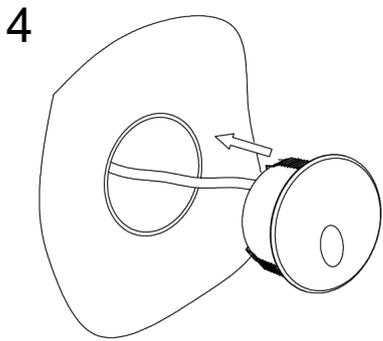

USE AS
RECESSED

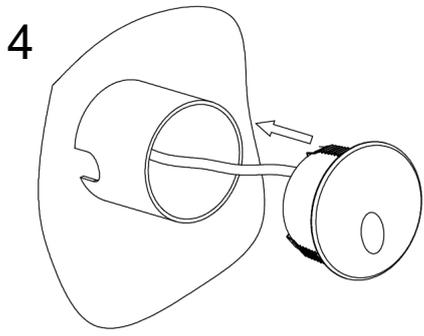


USE AS
RECESSED
WITH
SLEEVE

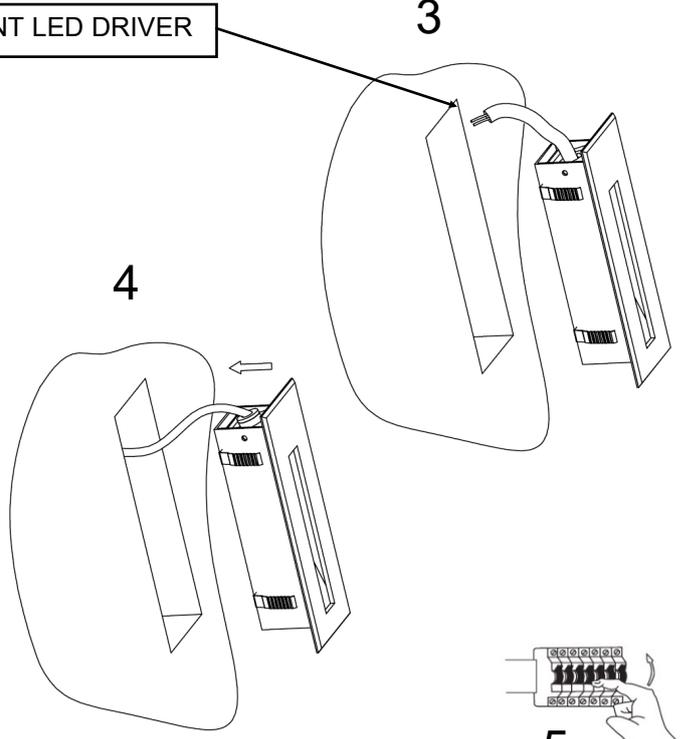

SAFETY INFORMATION: (Please retain for future reference)

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 3 product and does not requires an Earth connection – 230 (240) Volts – 50Hz AC. Must be connected to 350mA Constant Current LED driver, for multiple assembly all LED lights must be connected in series.

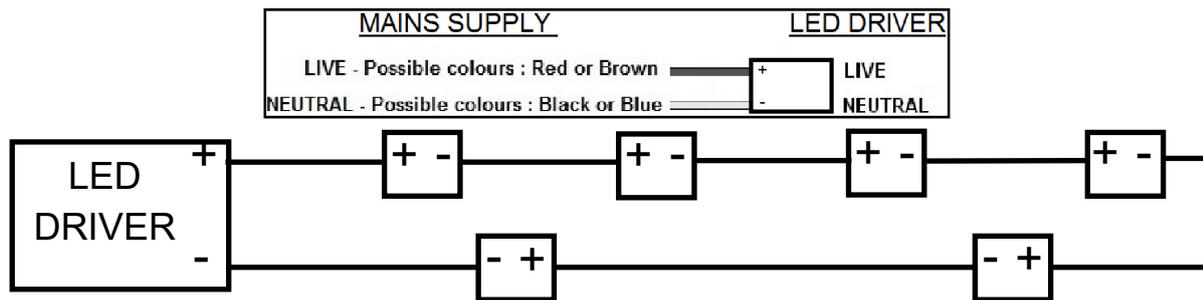

- This product must be installed in accordance with the national building regulations, if in doubt consult a competent electrician.
- Do not modify or alter any product before or after installation. This will invalidate your warranty and may render the product un-safe.

POSITION


- This fitting is a IP65 rated and is suitable for installation in Zone 1 and 2.
- Zone 1 covers the area above the bath or shower up to height of 2.25 meters and carries a minimum rating of IPX5.
- Zone 2 covers an area 0.6 meters wide immediately next to, and all around zone 1, plus the area below 2.5 meters high directly over the bath or shower. Wash basins should be treated as a zone 2. The minimum rating here is IPx4.
- This fitting is suitable for installation in Indoor locations only.
- Please make sure there is a minimum ventilation gap above the recessed fitting. DO NOT completely surround with Insulation.
- Ensure sufficient access to the fitting to enable safe maintenance.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2M is not expected.

LAMP INFORMATION:

- The LED lamp is not replaceable, when the lamps reach the end of their life the whole luminaire shall be replaced.
- This fitting is suitable for dimming When connected to a dimmable LED Driver

AFTERCARE AND MAINTENANCE:

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do Not use any abrasive cloths or cleaners as this may damage the product.

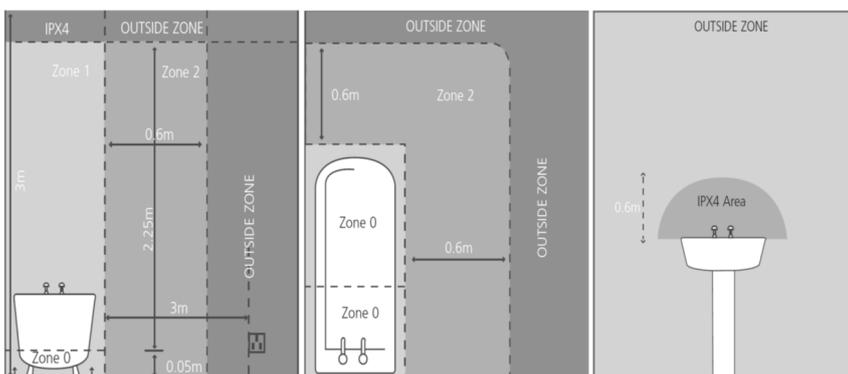

EAC UK CA CE



APPROVED
Q.C 19/03/2024
ISSUE 2



This symbol on the product indicates that this must not be disposed of with your other household waste. It is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of wasted electrical and electronic equipment. For more information about where you can drop off your waste equipment for recycling, please contact your local city officer, your household waste disposal service or the shop where you purchased the product.