


### MAINS SUPPLY

### LIGHT FITTING

LIVE - Possible colours : Red or Brown ——— LIVE

NEUTRAL - Possible colours : Black or Blue ——— NEUTRAL

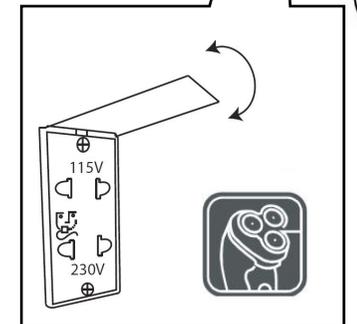

### SAFETY INFORMATION: (Please retain for future reference)

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 2 fitting and requires no Earth connection – 220 (240) Volts – 50Hz AC.
- This product must be installed in accordance with the national building regulations, if in doubt consult a competent electrician.
- Do not stare at the operating lamp .
- Do not modify or alter any product before or after installation. This may invalidate your warranty and may render the product un-safe.
- Do not place any very hot or very cold items on the glass shelves.
- Do not hit the glass shelves.
- Do not place items of more than 2Kg weight on a shelf.

### POSITION

- This fitting is suitable for installation in Indoor locations only .
- Ensure sufficient access to the fitting to enable safe maintenance.
- The Luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2m is not expected


### LED INFORMATION:

- This fitting is not suitable for dimming.
- The LED lamps are not replaceable, when the lamps reach the end of their life, the whole luminaire shall be replaced.
- The LED chip board & driver are removable, please refer to diagram. Once removed this fitting must be disposed.


### AFTERCARE AND MAINTENANCE:

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do not use any abrasive cloths or cleaners as this may damage the product .


## Door Adjustment

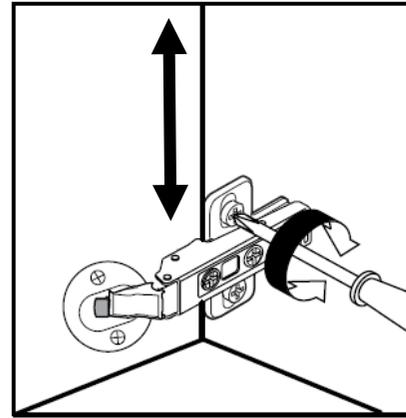

Height Adjustment — Loosen the 2 fixing screws using a Philips screwdriver and reposition the door so it is level with the glass side panels and then re-tighten the screws .

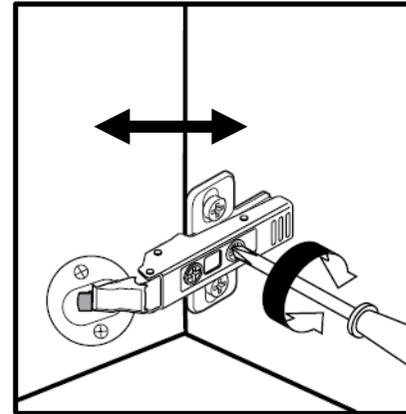

Width Adjustment — To adjust the gap between the door edge and the edge of the side panel , use a Philips screwdriver to adjust the screw until the door is level . Take care not to over adjust as to avoid closing the door on side panel.

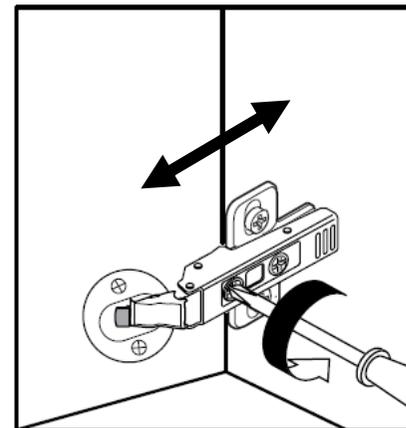

Depth Adjustment — To adjust the depth of the door ( this to ensure the door when closed is level with both side panels , using a Philips screwdriver adjust the screw until the correct depth is achieved.

## BATHROOM FITTINGS INFORMATION:

This fitting is a IP44 Rated and is suitable for installation in Zone 2.

All installations must comply to guidelines which are based on a zonal concept similar to that used for the installation of lighting around swimming pools.

Each zone rating (IP) is determined by the degree of risk of electric shock.

**Zone 0** This is the area inside the bath or shower basin and is rated at IPX7.

**Zone 1** Refers to the area above the bath or shower up to a height of 2.25 metres and carries a minimum rating of IPX4.

**Zone 2** Covers an area 0.6 metres wide immediately next to, and all around zone 1, plus the area below 2.5 metres high directly over the bath or shower. Wash basins should also be treated as zone 2. The minimum rating here is IPX4.

Where water jets are likely to be used for cleaning purposes in zones 1 and 2, the rating is a minimum **IPX5**.

**OUTSIDE ZONE** Covers any area outside Zone 1 and Zone 2. There is no special requirement in this Zone.

Bathrooms are now allowed to contain a socket outlet, this must be located 3m outside of Zone 1.

Lighting circuits and any socket-outlet circuit in a room containing a bath and/or shower must be provided with 30mA rcd protection.

**AREA AROUND SINKS** Covers up to 60cm.

Zone 2. IPX4 luminaires should be installed in this Zone.

