



4

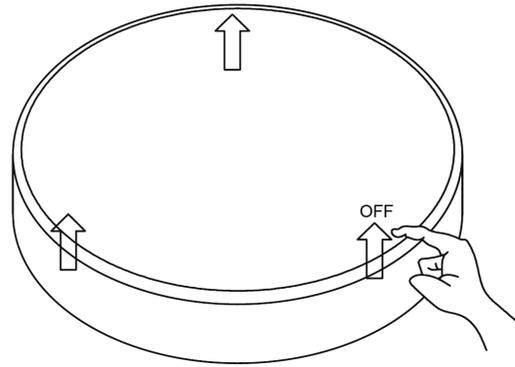


lightly press the spring in 3 positions to lift the lampshade off the chassis

5

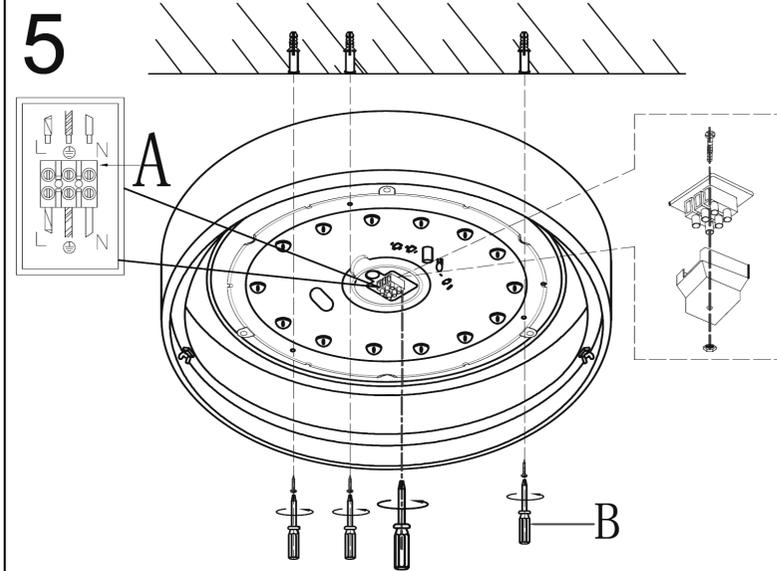


6

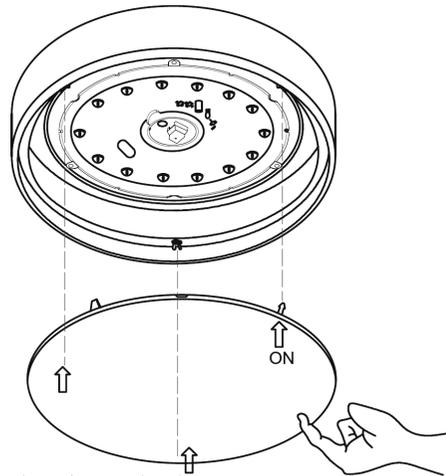

position the lampshade against the spring, lightly press the spring in 3 positions and fix the lampshade in the chassis

7

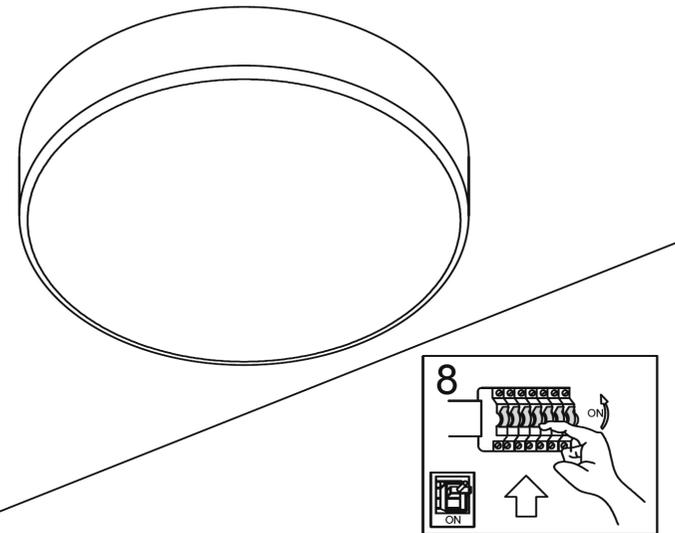

MAINS SUPPLY

LIGHT FITTING

