


1

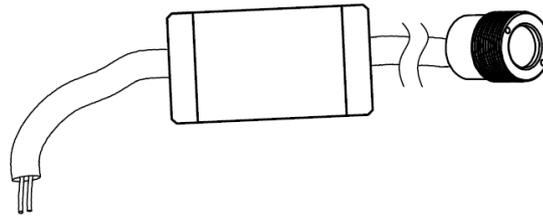


FOR USE WITH SEARCHLIGHT ITEMS

IPR-WRW-AC
IPR-WRSN-AC
IPR-WRCP-AC



FOR USE WITH SEARCHLIGHT ITEMS

IPR-WSLW-AC
IPR-WLSLN-AC
IPR-WSLCP-AC




2

3

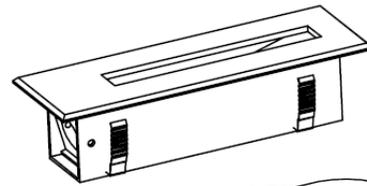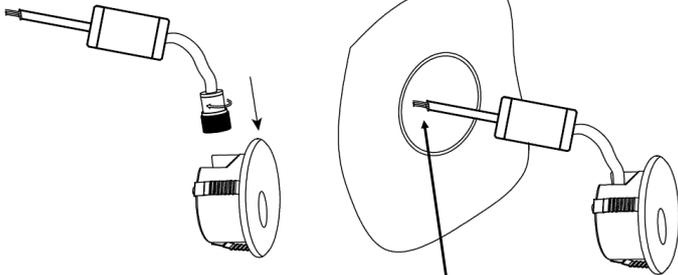


2

3

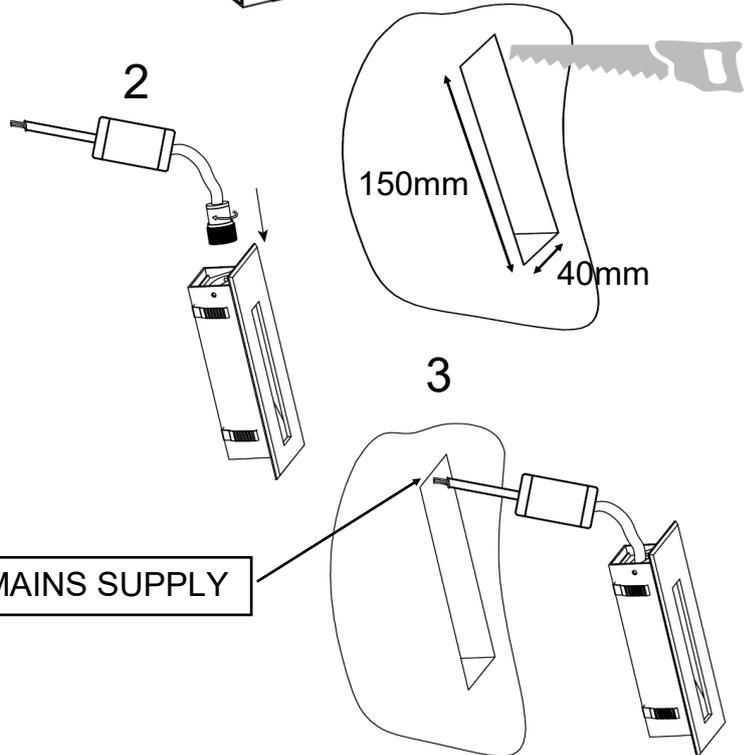


4

CONNECT DIRECT TO THE MAINS SUPPLY



USE AS
RECESSED



58mm



USE AS
RECESSED
WITH
SLEEVE

61mm

4



5

SAFETY INFORMATION: (Please retain for future reference)

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 1 product and does requires an Earth connection – 230 (240) Volts – 50Hz AC.



- This product must be installed in accordance with the national building regulations, if in doubt consult a competent electrician.
- Do not modify or alter any product before or after installation. This will invalidate your warranty and may render the product un-safe.

POSITION

- This fitting is a IP65 rated and is suitable for installation in Zone 1 and 2.
- Zone 1 covers the area above the bath or shower up to height of 2.25 meters and carries a minimum rating of IPX5.
- Zone 2 covers an area 0.6 meters wide immediately next to, and all around zone 1, plus the area below 2.5 meters high directly over the bath or shower. Wash basins should be treated as a zone 2. The minimum rating here is IPx4.
- This fitting is suitable for installation in Indoor locations only.
- Please make sure there is a minimum ventilation gap above the recessed fitting. DO NOT completely surround with Insulation.
- Ensure sufficient access to the fitting to enable safe maintenance.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2M is not expected.

LAMP INFORMATION:

- The LED lamp is not replaceable, when the lamps reach the end of their life the whole luminaire shall be replaced.
- This fitting is not suitable for dimming.

AFTERCARE AND MAINTENANCE:

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do Not use any abrasive cloths or cleaners as this may damage the product.

