


CORD END TERMINALS

Cord Ends


Standard & Dual Cord End Terminals

Standard length cord end terminals are manufactured from tin plated electrolytic copper. We supply 28 different types, in 16 sizes, available in both French and German colour ranges.

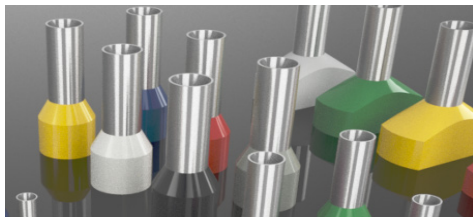

Cord End (Bootlace) Terminals

Ideal to reinforce the fine wire strands when terminating a cable into a connector block. Suitable for tri-rated cables and in accordance with DIN 46288 Part 4.



Temperature Range: -40°C to 105°C

Material: Tin Plated Copper / Nylon Insulation

Colour: Violet, White, Blue, Red, Black, Grey, Orange, Green, Brown, Light Blue, Ivory, Beige

Voltage: 600V

Standards: DIN 46288 Part 4

Colour Code: A = French / B = German



Code	Colour	Range mm ²	ID (A)	ID (B)	Pin (L1)	Length (L2)	Pack QTY
CE0.25A	Violet	0.25	0.8	2.0	6.0	10.4	100
CE0.25B	Lt Blue	0.25	0.8	2.0	6.0	10.4	100
CE0.50A	White	0.50	1.0	2.6	8.0	14.0	100
CE0.50B	Orange	0.50	1.0	2.6	8.0	14.0	100
CE0.75A	Blue	0.75	1.2	2.8	8.0	14.0	100
CE0.75B	White	0.75	1.2	2.8	8.0	14.0	100
CE1.0A	Red	1.0	1.4	3.0	8.0	16.0	100
CE1.0B	Yellow	1.0	1.4	3.0	8.0	16.0	100
CE1.5A	Black	1.5	1.7	3.5	8.0	14.0	100
CE1.5B	Red	1.5	1.7	3.5	8.0	14.0	100
CE2.5A	Grey	2.5	2.3	4.2	8.0	15.0	100
CE2.5B	Blue	2.5	2.3	4.2	8.0	15.0	100
CE4.0A	Orange	4.0	2.8	4.8	9.0	16.0	100
CE4.0B	Grey	4.0	2.8	4.8	9.0	16.0	100
CE6.0A	Green	6.0	3.5	6.0	12.0	22.0	100
CE6.0B	Black	6.0	3.5	6.0	12.0	22.0	100
CE10.0A	Brown	10.0	4.5	7.4	12.0	22.0	100
CE10.0B	Ivory	10.0	4.5	7.4	12.0	22.0	100
CE16.0A	Ivory	16.0	5.8	8.8	12.0	22.0	100
CE16.0B	Green	16.0	5.8	8.8	12.0	22.0	100
CE25.0A	Black	25.0	7.5	11.0	16.0	28.0	100
CE25.0B	Brown	25.0	7.5	11.0	16.0	28.0	100
CE35.0A	Red	35.0	8.3	12.7	16.0	30.0	100
CE35.0B	Beige	35.0	8.3	12.7	16.0	30.0	100
CE50.0A	Blue	50.0	10.3	15.0	19.0	36.0	50
CE70.0A	Yellow	70.0	13.5	16.0	20.0	37.0	50
CE95.0A	Red	95.0	14.7	18.0	25.0	44.0	50
CE120.0A	Blue	120.0	16.7	21.0	27.0	48.0	50



Tooling

See Page 272-273

SECTION CONTENTS | Ident & Terminals

CORD END & DUAL CORD END TERMINALS

Uninsulated Cord End (Bootlace) Terminals

Uninsulated cord end terminal for terminating cable ends before fitting into screw type termination blocks/connectors.



- Flared barrel for easy wire insertion.

Temperature Range: -40°C to 105°C

Material: Tin Plated Copper

Voltage: 600V

Standards: DIN 46288 Part 1




Code	Range mm ²	ID (A)	ID (B)	Pin (L1)	Pack QTY
UNCE0.5-6	0.50	1.0	1.7	6.0	100
UNCE0.75-10	0.75	1.2	1.9	10.0	100
UNCE1.0-10	1.0	1.4	2.2	10.0	100
UNCE1.5-10	1.5	1.7	2.5	10.0	100
UNCE2.5-12	2.5	2.3	3.3	12.0	100
UNCE4.0-12	4.0	2.8	3.9	12.0	100
UNCE6.0-15	6.0	3.5	4.7	15.0	100
UNCE10.0-18	10.0	4.5	5.8	18.0	100
UNCE25.0-15	25.0	7.5	9.1	15.0	100
UNCE35.0-18	35.0	8.3	10.2	18.0	100
UNCE50.0-32	50.0	10.3	11.5	32.0	100
UNCE70.0-32	70.0	14.8	15.8	32.0	100
UNCE95.0-32	95.0	14.8	17.3	32.0	100
UNCE120.0-32	120.0	16.7	20.2	32.0	100

Dual Cord End (Bootlace) Terminals

A complete range of dual entry cord end terminals. Designed to accommodate two cables terminating in the same sleeve.

- They are ideal for looping conductors.




Temperature Range: -40°C to 105°C

Material: Tin Plated Copper / Nylon Insulation

Colour: Black, Blue, White, Grey, Yellow, Red

Voltage: 600V

Standards: DIN 46288 Part 4



Code	Colour	Range mm ²	ID (A)	ID (B)	Pin (L1)	Length (L2)	Pack QTY
TWIN0.50	White	2x 0.50	1.5	4.9	8.0	15.0	100
TWIN0.75	Grey	2x 0.80	1.8	5.2	8.0	15.0	100
TWIN1.0	Red	2x 1.0	2.0	5.3	8.0	15.0	100
TWIN1.5	Black	2x 1.5	2.3	6.5	8.0	16.0	100
TWIN2.5	Blue	2x 2.5	2.9	8.0	10.0	18.5	100
TWIN4.0	Grey	2x 4.0	3.8	8.8	12.0	23.0	100
TWIN6.0	Yellow	2x 6.0	4.9	9.3	14.0	26.0	100
TWIN10.0	Red	2x 10.0	6.5	12.8	14.0	26.5	100
TWIN16.0	Blue	2x 16.0	8.3	18.5	14.0	30.5	100