


## PRE-INSULATED CRIMP TERMINALS

# Pre-Insulated Ring, Fork and Blade Terminals



Made from high conductivity copper, these terminals are electro-tin plated for excellent conductivity and resistance to corrosion. Pre-Insulation is manufactured from Vinyl with a flared barrel for easy wire insertion.

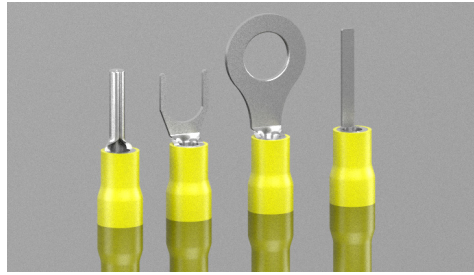

### Pre-Insulated Ring Terminals

Ring terminals connect a single wire to a screw or stud type electrical connection. The terminal connectors ring shape completely surrounds the screw or stud to create a tight connection.

**Temperature Range:** -10°C to 75°C  
**Material:** Tin Plated Copper / Vinyl Insulation  
**Colour:** Red, Blue, Yellow  
**Voltage:** 600V  
**Standards:** DIN 46288 Part 4



Code	Colour	Range mm <sup>2</sup>	ID (A)	ID (B)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RR32	Red - 19A Max	0.5-1.5	1.7	3.3	7.5	17.5	5.5	100
RR37		0.5-1.5	1.7	3.8	7.5	17.5	5.5	100
RR43		0.5-1.5	1.7	4.4	9.4	19.4	6.6	100
RR53		0.5-1.5	1.7	5.4	10.8	20.8	8.0	100
RR64		0.5-1.5	1.7	6.4	16.8	26.7	11.6	100
RR84		0.5-1.5	1.7	8.4	16.8	26.7	11.6	100
RR105	Blue - 27A Max	0.5-1.5	1.7	10.5	20.5	30.5	13.6	100
BR32		1.5-2.5	2.3	3.3	7.8	17.8	6.6	100
BR37		1.5-2.5	2.3	3.8	7.8	17.8	6.6	100
BR43		1.5-2.5	2.3	4.4	11.8	21.8	6.6	100
BR53		1.5-2.5	2.3	5.4	11.8	21.8	8.5	100
BR64		1.5-2.5	2.3	6.4	16.8	26.8	12.0	100
BR84		1.5-2.5	2.3	8.4	16.8	26.8	12.0	100
BR105		1.5-2.5	2.3	10.5	20.5	30.5	13.6	100
BR130		1.5-2.5	2.3	13.0	25.4	35.4	19.2	100
YR43		Yellow - 48A Max	4.0-6.0	3.4	4.4	9.7	23.2	7.2
YR53	4.0-6.0		3.4	5.4	13.0	27.3	9.5	100
YR64	4.0-6.0		3.4	6.4	16.5	29.5	12.0	100
YR84	4.0-6.0		3.4	8.4	21.0	34.5	15.0	100
YR105	4.0-6.0		3.4	10.5	21.0	34.5	15.0	100
YR130	4.0-6.0		3.4	13.0	25.6	39.1	19.2	100

# PRE-INSULATED RING TERMINALS | Ident & Terminals

## PRE-INSULATED CRIMP TERMINALS



### Pre-Insulated Fork Terminals


Fork terminals, are designed to behave similarly to ring terminals but with a fork shaped end that allows the terminal to be installed or removed in tight spaces.

**Temperature Range:** -10°C to 75°C

**Material:** Tin Plated Copper / Vinyl Insulation

**Voltage:** 600V

**Colour:** Red, Blue, Yellow



Code	Colour	Range mm <sup>2</sup>	ID (A)	ID (B)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RF32	Red - 19A Max	0.5-1.5	1.7	3.3	10.0	21.0	5.7	100
RF37		0.5-1.5	1.7	3.8	10.0	21.0	5.7	100
RF43		0.5-1.5	1.7	4.4	10.0	21.0	6.4	100
RF53		0.5-1.5	1.7	5.4	10.0	21.0	8.1	100
RF64		0.5-1.5	1.7	6.6	10.0	21.0	9.5	100
BF32		Blue - 27A Max	1.5-2.5	2.3	3.3	10.0	21.0	5.7
BF37	1.5-2.5		2.3	3.8	10.0	21.0	5.7	100
BF43	1.5-2.5		2.3	4.4	10.0	21.0	6.4	100
BF53	1.5-2.5		2.3	5.4	10.0	21.0	8.1	100
BF64	1.5-2.5		2.3	6.6	10.0	21.0	9.3	100
YF37	Yellow - 48A Max		4.0-6.0	3.4	3.8	13.0	25.5	8.3
YF43		4.0-6.0	3.4	4.4	13.0	25.5	8.3	100
YF53		4.0-6.0	3.4	5.4	13.0	25.5	9.0	100
YF64		4.0-6.0	3.4	6.6	13.0	25.5	9.0	100



### Pre-Insulated Blade Terminals


A blade connector is a type of single wire connection using a flat conductive blade which is inserted into a blade receptacle.

**Temperature Range:** -10°C to 75°C

**Material:** Tin Plated Copper / Vinyl Insulation

**Voltage:** 600V

**Colour:** Red, Blue, Yellow



Code	Colour	Range mm <sup>2</sup>	ID (A)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RB2318	Red - 19A Max	0.5-1.5	1.7	18.0	28.0	2.2	100
BB2318	Blue - 27A Max	1.5-2.5	2.3	18.0	28.0	2.2	100
YB2818	Yellow - 48A Max	4.0-6.0	3.4	18.0	31.0	2.8	100



### Pre-Insulated Pin Terminals



Wire Pin Terminals offer quick and easy connections in applications where set screws or clamps are used to make electrical contact with the wire

**Temperature Range:** -10°C to 75°C

**Material:** Tin Plated Copper / Vinyl Insulation

**Voltage:** 600V

**Colour:** Red, Blue, Yellow




Code	Colour	Range mm <sup>2</sup>	ID (A)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RP1912	Red - 19A Max	0.5-1.5	1.7	12.0	21.8	1.9	100
BP1912	Blue - 27A Max	1.5-2.5	2.3	12.0	21.8	1.9	100
YP2914	Yellow - 48A Max	4.0-6.0	3.4	13.0	26.0	2.8	100

# Ident & Terminals | PRE-INSULATED SPADE TERMINALS

## PRE-INSULATED CRIMP TERMINALS

# Pre-Insulated Spade Terminals



Made from high conductivity copper, these terminals are electro-tin plated for excellent conductivity and resistance to corrosion. Pre-Insulation is manufactured from Vinyl with a flared barrel for easy wire insertion.

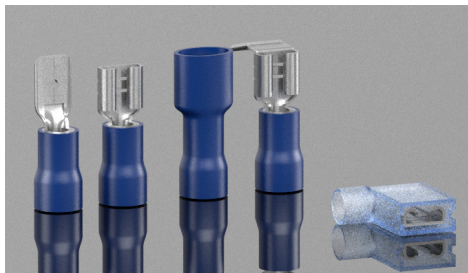

### Pre-Insulated Male Spade Terminals

Pre-insulated male spade terminals.

**Temperature Range:** -10°C to 75°C  
**Material:** Tin Plated Copper / Vinyl Insulation  
**Voltage:** 300V  
**Colour:** Red, Blue, Yellow





Code	Colour	Range mm <sup>2</sup>	Tab	ID (A)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RTAB28	Red - 19A Max	0.5-1.5	0.5 x 2.8	1.7	11.3	18.7	2.8	100
RTAB48		0.5-1.5	0.8 x 4.8	1.7	11.3	19.2	4.8	100
RTAB63		0.5-1.5	0.8 x 6.4	1.7	11.3	20.8	6.35	100
BTAB48	Blue - 27A Max	1.5-2.5	0.8 x 4.8	2.3	11.3	19.2	4.8	100
BTAB63		1.5-2.5	0.8 x 6.4	2.3	11.3	20.8	6.40	100
YTAB63	Yellow - 48A Max	4.0-6.0	0.8 x 6.4	3.4	11.0	24.0	6.35	100

### Pre-Insulated Female Spade Terminals

Pre-insulated female spade terminals.

**Temperature Range:** -10°C to 75°C  
**Material:** Tin Plated Copper / Vinyl Insulation  
**Voltage:** 300V  
**Colour:** Red, Blue, Yellow



Code	Colour	Range mm <sup>2</sup>	Tab	ID (A)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RFS28-5	Red - 19A Max	0.5-1.5	0.5 x 2.8	1.7	10.5	18.8	3.2	100
RFS28-8		0.5-1.5	0.8 x 2.8	1.7	10.5	18.8	3.2	100
RFS48-5		0.5-1.5	0.5 x 4.8	1.7	10.5	19.0	5.0	100
RFS48-8		0.5-1.5	0.8 x 4.8	1.7	10.5	19.0	5.0	100
RFS63	Blue - 27A Max	0.5-1.5	0.8 x 6.4	1.7	10.5	20.8	6.6	100
BFS48-5		1.5-2.5	0.5 x 4.8	2.3	10.5	19.0	5.0	100
BFS48-8		1.5-2.5	0.8 x 4.8	2.3	10.5	19.0	5.0	100
BFS63		1.5-2.5	0.8 x 6.4	2.3	10.5	20.8	6.6	100
BFS83		1.5-2.5	0.8 x 8.0	2.3	10.5	24.5	8.2	100
YFS63		Yellow - 48A Max	4.0-6.0	0.8 x 6.4	3.4	13.0	23.8	6.6
YFS95	4.0-6.0		1.2 x 9.4	3.4	13.0	30.0	10.0	100

All dimensions in mm except where stated

# PRE-INSULATED SPADE TERMINALS | Ident & Terminals



## PRE-INSULATED CRIMP TERMINALS




### Fully Insulated Female Spade Terminals

Fully insulated female spade terminals.

**Temperature Range:** -10°C to 75°C  
**Material:** Tin Plated Copper / Vinyl Insulation  
**Voltage:** 300V  
**Colour:** Red, Blue, Yellow




Code	Colour	Range mm <sup>2</sup>	Tab	ID (A)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RFS28FI-5	Red - 19A Max	0.5-1.5	0.5 x 2.8	1.7	10.5	19.0	3.2	100
RFS28FI-8		0.5-1.5	0.8 x 2.8	1.7	10.5	19.0	3.2	100
RFS48FI-5		0.5-1.5	0.5 x 4.8	1.7	10.5	19.0	5.0	100
RFS48FI-8		0.5-1.5	0.8 x 4.8	1.7	10.5	19.0	5.0	100
RFS63FI	Blue - 27A Max	0.5-1.5	0.8 x 6.4	1.7	10.5	21.8	6.6	100
BFS48FI-5		1.5-2.5	0.5 x 4.8	2.3	10.5	19.0	5.0	100
BFS48FI-8		1.5-2.5	0.8 x 4.8	2.3	10.5	19.0	5.0	100
BFS63FI		1.5-2.5	0.8 x 6.4	2.3	10.5	22.8	6.6	100
YFS63FI	Yellow - 48A Max	4.0-6.0	0.8 x 6.4	3.4	10.9	23.8	6.6	100
YFS95FI		4.0-6.0	1.2 x 9.4	3.4	10.9	30.0	10.0	100



### Pre-Insulated Piggy Back Spade Terminals

Pre-insulated piggy back spade terminals.

**Temperature Range:** -10°C to 75°C  
**Material:** Tin Plated Copper / Vinyl Insulation  
**Voltage:** 300V  
**Colour:** Red, Blue, Yellow





Code	Colour	Range mm <sup>2</sup>	Tab	ID (A)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RPB63	Red - 19A Max	0.5-1.5	0.8 x 6.4	1.7	12.0	21.0	6.7	100
BPB63	Blue - 27A Max	1.5-2.5	0.8 x 6.4	2.3	12.0	21.0	6.7	100
YPB63	Yellow - 48A Max	4.0-6.0	0.8 x 6.4	3.4	11.0	24.5	6.7	100



### Fully Insulated Female Flag Spade Terminals

Fully insulated female flag spade terminals.

**Temperature Range:** -40°C to 105°C  
**Material:** Tin Plated Copper / Nylon Insulation  
**Voltage:** 300V  
**Colour:** Red, Blue



Code	Colour	Range mm <sup>2</sup>	ID (A)	Length (L2)	Width (W)	Pack QTY
RFLAG63	Red - 19A Max	0.5-1.5	1.7	16.0	6.6	100
BFLAG63	Blue - 27A Max	1.5-2.5	2.3	16.0	6.6	100

# Ident & Terminals | PRE-INSULATED BULLET CONNECTORS

## PRE-INSULATED CRIMP TERMINALS

# Pre-Insulated Bullet Connectors

Made from high conductivity copper, these terminals are electro-tin plated for excellent conductivity and resistance to corrosion. Pre-Insulation is manufactured from Vinyl with a flared barrel for easy wire insertion.



### Pre-Insulated Male Bullet Terminals


Bullet terminal connectors provide a secure and reliable connection by mating a female and male wire terminal.

**Temperature Range:** -10°C to 75°C

**Material:** Tin Plated Copper / Vinyl Insulation

**Voltage:** 300V

**Colour:** Red, Blue, Yellow



Code	Colour	Range mm <sup>2</sup>	ID (A)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RBU40	Red - 19A Max	0.5-2.5	1.7	11.0	21.0	4.0	100
BBU40	Blue - 27A Max	1.5-2.5	2.3	11.2	21.0	4.0	100
BBU50	Blue - 27A Max	1.5-2.5	2.3	10.7	21.0	5.0	100
YBU50	Yellow - 48A Max	4.0-6.0	3.4	11.0	25.5	5.0	100



### Pre-Insulated Female Bullet Terminals


Bullet terminal connectors provide a secure and reliable connection by mating a female and male wire terminal.

**Temperature Range:** -10°C to 75°C

**Material:** Tin Plated Copper / Vinyl Insulation

**Voltage:** 300V

**Colour:** Red, Blue, Yellow



Code	Colour	Range mm <sup>2</sup>	ID (A)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RBR40	Red - 19A Max	0.5-2.5	1.7	12.8	25.5	3.9	100
BBR40	Blue - 27A Max	1.5-2.5	2.3	12.8	25.5	3.9	100
BBR50	Blue - 27A Max	1.5-2.5	2.3	12.8	25.5	4.9	100
YBR50	Yellow - 48A Max	4.0-6.0	3.4	12.6	28.0	4.9	100



### Pre-Insulated Butt Connectors



Double ended female wire terminals that create a simple connection by mating two wires together.

**Temperature Range:** -10°C to 75°C

**Material:** Tin Plated Copper / Vinyl Insulation

**Voltage:** 600V

**Colour:** Red, Blue, Yellow




Code	Colour	Range mm <sup>2</sup>	ID (A)	Length (L2)	Width (W)	Pack QTY
RBC	Red - 19A Max	0.5-1.5	1.8	24.5	4.3	100
BBC	Blue - 27A Max	1.5-2.5	2.4	24.5	4.8	100
YBC	Yellow - 48A Max	4.0-6.0	3.5	27.0	6.7	100

All dimensions in mm except where stated

# PRE-INSULATED BULLET CONNECTORS | Ident & Terminals


## QUICK CONNECTORS

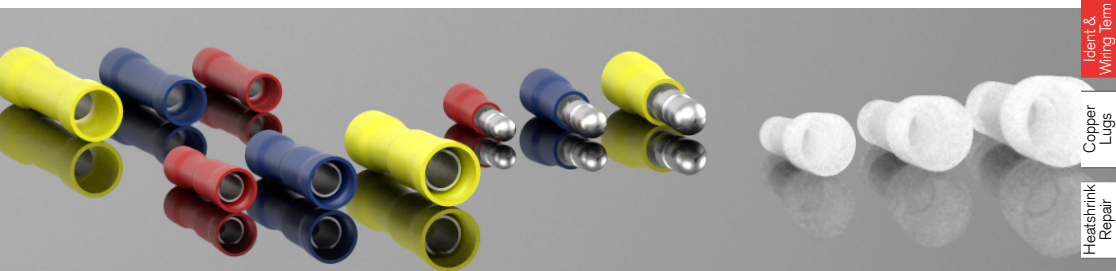

Ident & Wiring term  
Copper Lugs  
Heatshrink Repair  
Cable Joining  
Junction Boxes  
Flexible Conduit  
Cable Glands  
Gland Accs.  
Cable Cleats  
Earthing Lightning  
MCC Cable  
Cable Ties & Acc  
Tooling & Cable Prep  
Fixing & Security

### Closed End Connectors

Closed end connectors.





**Temperature Range:** -40°C to 105°C

**Material:** Tin Plated Copper / Zero Halogen Nylon Insulation

**Voltage:** 600V


**Colour:** Clear



Code	Range mm <sup>2</sup>	ID (A)	Length (L2)	Width (W)	Pack QTY
CECS	0.5 - 1.5	2.6	18.2	5.5	100
CECM	1.5 - 2.5	3.3	20.0	8.0	100
CECL	4.0 - 6.0	4.5	25.5	11.0	100

### Quick Splice / Connectors

Quick splice connectors.




**Temperature Range:** -40°C to 105°C

**Material:** Tin Plated Copper / Zero Halogen Nylon Insulation

**Voltage:** 600V

**Colour:** Red, Blue, Yellow



Code	Colour	Range mm <sup>2</sup>	Length (L2)	Width (W)	Pack QTY
RCT	Red - 19A Max	0.5 - 1.5	29.0	19.0	100
BCT	Blue - 27A Max	1.5 - 2.5	29.0	19.0	100
YCT	Yellow - 48A Max	4.0 - 6.0	35.5	20.4	100

### Heat Shrinkable Solder Sleeve

Heat shrinkable solder sleeve.

**Temperature Range:** -45°C to 125°C




**Shrinkable Temp:** +125°C to 180°C

**Material:** Polyethylene Insulation / Solder ring / Glue adhesive

**Colour:** Red, Blue, Yellow, White

**Voltage:** 600V

**Standards:** DIN 46288 Part 4



Code	Colour	Range mm <sup>2</sup>	Length (L2)	Min (A)	Wire Min	Wire Max	Pack QTY
HSSOLW	White	0.25-.034	26.0	1.7	0.4	1.7	100
HSSOLR	Red - 19A Max	0.5-1.5	40.0	2.7	1.3	2.7	100
HSSOLB	Blue - 27A Max	1.5-2.5	40.0	4.5	1.8	4.5	100
HSSOLY	Yellow - 48A Max	4.0-6.0	40.0	6.0	2.8	6.0	100

## CORD END TERMINALS

# Box Kits

## Cord Ends & Pre-Insulated Terminals



### Cord End (Bootlace) Terminals - French

Crimp Cord End Terminals set includes a variety of high-quality French colour-coded insulated bootlace cord ends and ferrules. The box contains sections for wire ferrules ranging from 0.5 mm<sup>2</sup> to 10 mm<sup>2</sup>, allowing for simple selection.

**Material:** Tin Plated Copper / Vinyl Insulation

**Colour:** White, Blue, Red, Black, Grey, Orange, Green, Brown

**Voltage:** 600V

**Standards:** DIN 46288 Part 4

**Colour Code:** French



Code	Description	Size Range mm <sup>2</sup>
BK01	8 Compartment / Approx 2600 Items	0.5 - 10.0



### Cord End (Bootlace) Terminals - German

Crimp Cord End Terminals set includes a variety of high-quality French colour-coded insulated bootlace cord ends and ferrules. The box contains sections for wire ferrules ranging from 0.5 mm<sup>2</sup> to 10 mm<sup>2</sup>, allowing for simple selection.

**Material:** Tin Plated Copper / Vinyl Insulation

**Colour:** Orange, White, Yellow, Red, Blue, Grey, Black, Ivory

**Voltage:** 600V

**Standards:** DIN 46288 Part 4

**Colour Code:** German



Code	Description	Size Range mm <sup>2</sup>
BK02	8 Compartment / Approx 2600 Items	0.5 - 10.0



### Dual Cord End (Bootlace) Terminals

Dual Crimp Cord End Terminals set includes a variety of high-quality colour-coded insulated bootlace cord ends and ferrules. These double ended female wire terminals create a simple connection by mating two wires together. The box contains sections for wire ferrules ranging from 0.5 mm<sup>2</sup> to 10 mm<sup>2</sup>, allowing for simple selection.

**Material:** Tin Plated Copper / Vinyl Insulation

**Colour:** White, Grey, Red, Black, Blue, Yellow

**Voltage:** 600V

**Standards:** DIN 46288 Part 4



Code	Description	Size Range mm <sup>2</sup>
BK03	8 Compartment / Approx 770 Items	0.5 - 10.0



## Tooling

See Page 272-273

# BOX KITS | Ident & Terminals

## PRE-INSULATED CRIMP TERMINALS



### Pre-Insulated Terminals 1.5mm<sup>2</sup>

Selection of popular Red 1.5mm<sup>2</sup> terminals including; ring, male & female spade, fully insulated female spade, male & female bullet and butt connectors.

**Material:** Tin Plated Copper / Vinyl Insulation

**Colour:** Red



Code	Description	Size Range mm <sup>2</sup>
BK06	12 Compartment / Approx 400 Items	1.5



### Pre-Insulated Terminals 2.5mm<sup>2</sup>

Selection of popular Blue 2.5mm<sup>2</sup> terminals including; ring, male & female spade, fully insulated female spade, male & female bullet and butt connectors.

**Material:** Tin Plated Copper / Vinyl Insulation

**Colour:** Blue



Code	Description	Size Range mm <sup>2</sup>
BK07	10 Compartment / Approx 400 Items	2.5



### Pre-Insulated Terminals 6.0mm<sup>2</sup>

Selection of popular Yellow 6.0mm<sup>2</sup> terminals including; ring, male & female spade, fully insulated female spade, male & female bullet and butt connectors.

**Material:** Tin Plated Copper / Vinyl Insulation

**Colour:** Yellow



Code	Description	Size Range mm <sup>2</sup>
BK08	13 Compartment / Approx 400 Items	6.0



### Assorted Pre-Insulated Terminals 1.5-6.0mm<sup>2</sup>

Selection of popular Red, Blue & Yellow 1.5-6.0mm<sup>2</sup> terminals including; ring, male & female spade, fully insulated female spade, male & female bullet and butt connectors.

**Material:** Tin Plated Copper / Vinyl Insulation

**Colour:** Red, Blue, Yellow



Code	Description	Size Range mm <sup>2</sup>
BK09	16 Compartment / Approx 365 Items	1.5 - 6.0



Call the Remora sales team at **01226 352 000**

Challenge us - We find a solution

Ident & Wiring Terminals  
Copper Lugs  
Heatshrink Repair  
Cable Joining  
Junction Boxes  
Flexible Conduit  
Cable Glands  
Gland Accs.  
Cable Cleats  
Earthing Lightning  
MCC Cable  
Cable Ties & Acc  
Tooling & Cable Prep  
Fixing & Security