


SHAD

KYMCO AGILITY 125 S / AGILITY 125 PLUS '23

SHAD LOCKS K0GL13SC

SIZE
5


BCN



1 263414 x 1



2 262922 x 1



3 304090 x 1
M8 x 70 DIN 912

WARNING!

(GB)

Tight firmly the pivot.
Make sure that the pivot
is firmly tight.
LUBRICATE ONLY WITH
Check tightness every
4 months..

(E)

Apretar el pivote
fuertemente. Asegurarse de
que el pivote queda
totalmente fijado. LUBRICAR
Repasar apriete cada 4
meses.

(D)

Zapfen besonders fest anziehen und
sicherstellen, dass er sich nicht
mehr bewegen kann. ALS
SCHMIERMITTEL IST NUR ÖL VOM
Alle 4 Monate Drehmoment
überprüfen.


(I)

Premere il perno con
forza. Assicurarsi che il
perno sia opletamente
fissato. LUBRIFICARE
Controllare il serraggio
delle viti ogni 4 mesi..

(F)


Serrer fortement le pivot.
S'assurer qu'il reste
totalement fixé.
AVEC WD-40!
Vérifier le serrage des
vis tous les 4 mois.

1

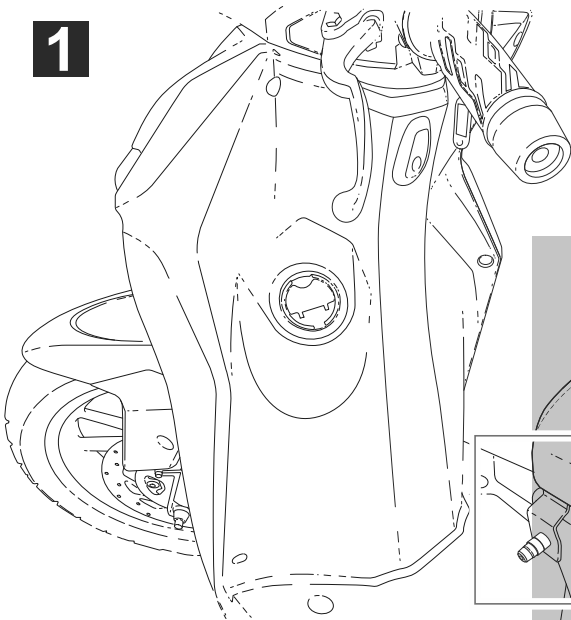


A

2

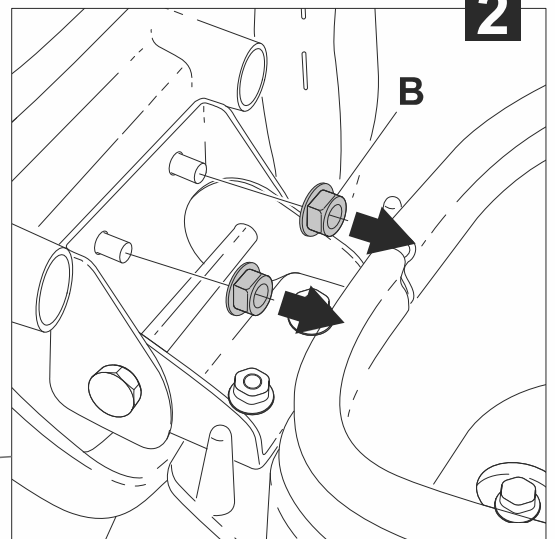

B


3

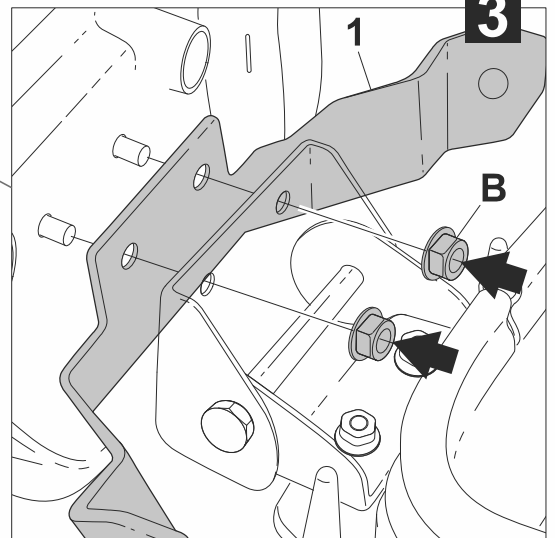

1

B


5

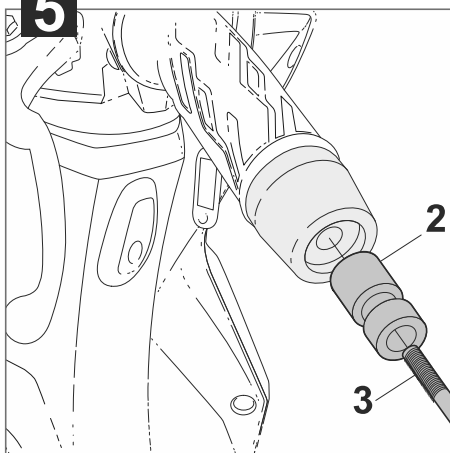

2

3

4

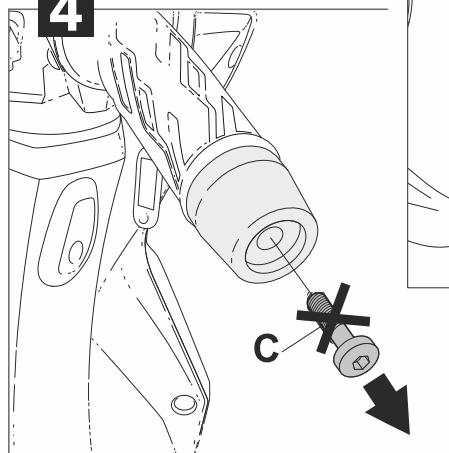

C

WWW.SHAD.ES

IMPORTANT: Based on European models. For compatibility with models in other continents, check www.shad.es

REF. 500479 Edition 1ª