



SHAD

QJ MOTOR FORT 4.0 350 '24

SHAD LOCKS Q0FR34SC

SIZE
5

BCN



- 1** 263464 x 1 **2** 263465 x 1 **3** 303017 x 4 Ø6 **4** 304298 x 4 M6 x 16 DIN 7380 **5** 262921 x 1 **6** 262919 x 1 Øint 6 (8x6x15) **7** 303000 x 1 Ø6 **8** 304071 x 1 M6 x 50 DIN 912

WARNING!

(GB)

Tight firmly the pivot.
Make sure that the pivot
is firmly tight.
LUBRICATE ONLY WITH
WD-40 OIL!
Check tightness every
4 months..

(E)

Apretar el pivote
fuertemente. Asegurarse de
que el pivote queda
totalmente fijado. LUBRICAR
SOLO CON ACEITE WD-40 !
Reparar apriete cada 4
meses.

(D)


Zapfen besonders fest anziehen und
sicherstellen, dass er sich nicht
mehr bewegen kann. ALS
SCHMIERMITTEL IST NUR ÖL VOM
TYP (WD 40) ZU VERWENDEN
Alle 4 Monate Drehmoment
überprüfen.

(I)

Premere il perno con
forza. Assicurarsi che il
perno sia ometamente
fissato. LUBRIFICARE
SOLO CON OLIO WD-40!
Controllare il serraggio
delle viti ogni 4 mesi..

(F)

Serrer fortement le pivot.
S'assurer qu'il reste
totalement fixé.
AVEC WD-40!
Vérifier le serrage des
vis tous les 4 mois.

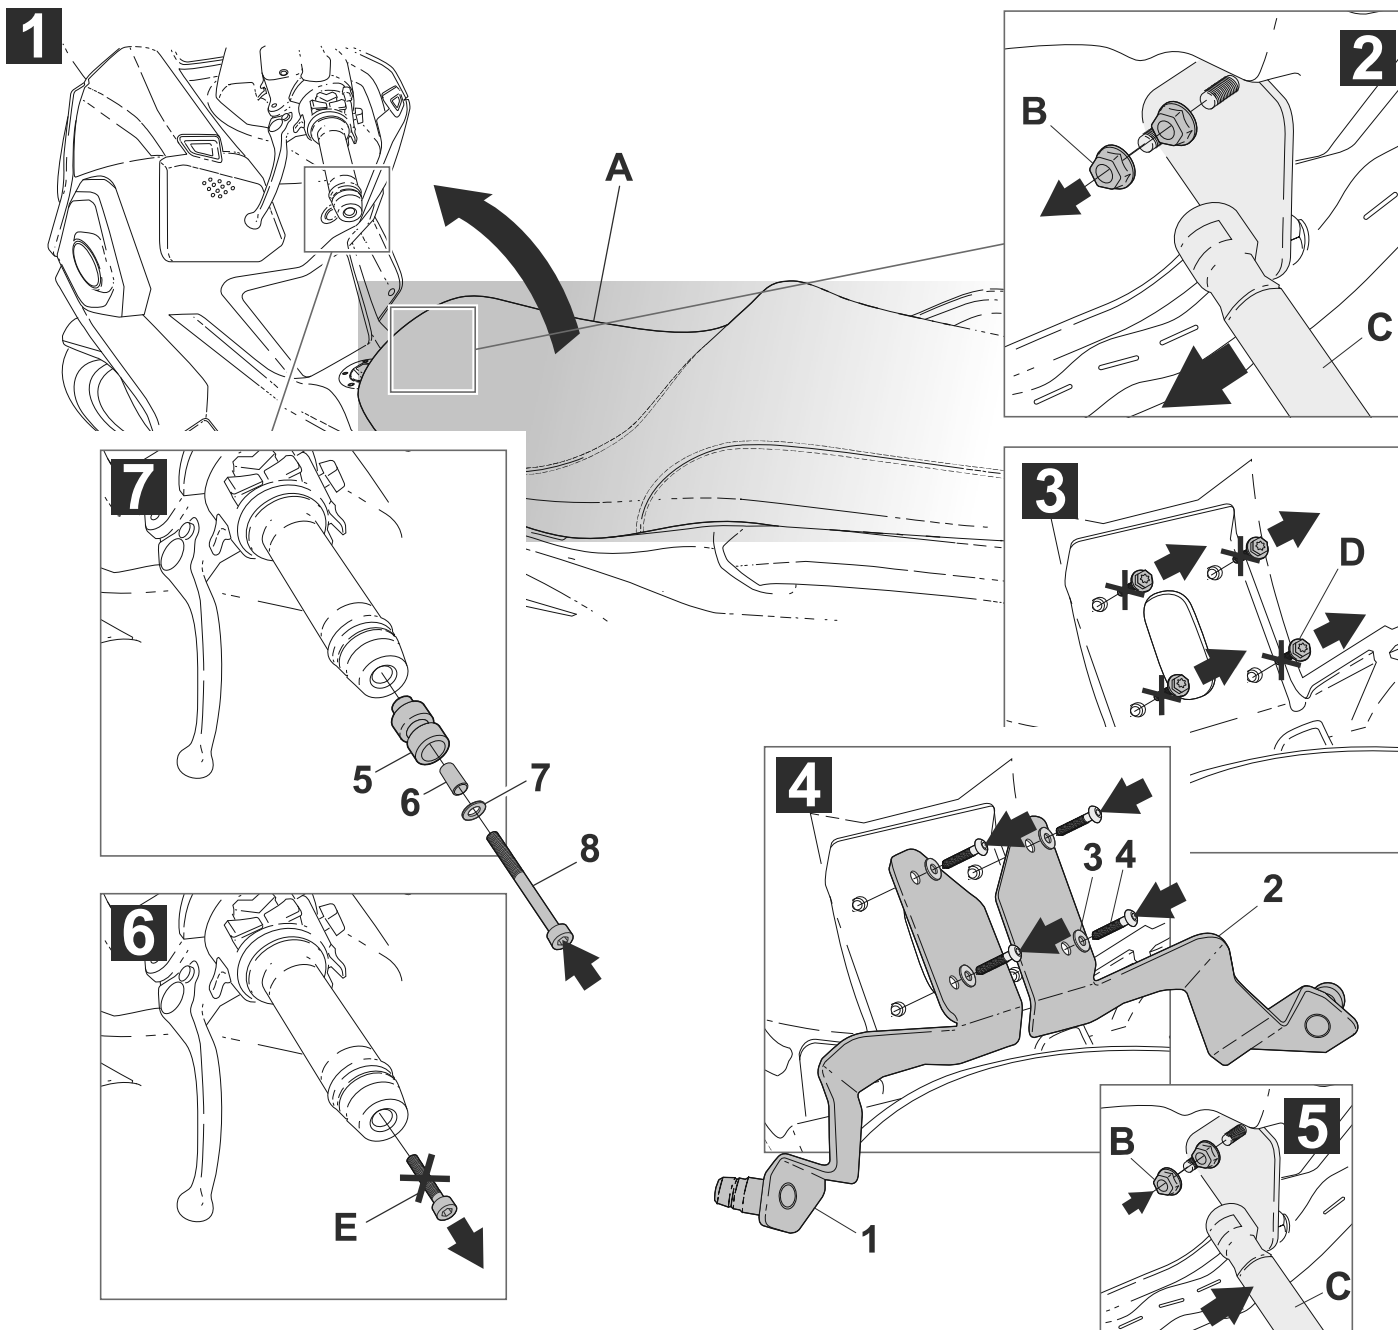

WWW.SHAD.ES

IMPORTANT: Based on European models. For compatibility with models in other continents, check www.shad.es

REF. 500479 Edition 1ª