


# SHAD

## SYM MAXSYM 400i '21- SHAD LOCKS S0MS43SC

SIZE  
**5**

**BCN**

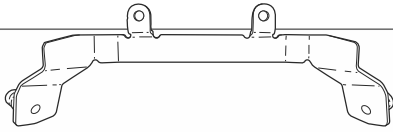

**1** 262743 x 1



**2** 304012 x 2  
M6x16 DIN 912



**3** 303017 x 2  
Ø6



**4** 262920 x 1



**5** 304179 x 1  
M6x65 DIN 912

### WARNING!

(GB)

Tight firmly the pivot.  
Make sure that the pivot  
is firmly tight.  
LUBRICATE ONLY WITH  
WD-40 OIL!  
Check tightness every  
4 months..

(E)

Apretar el pivote  
fuertemente. Asegurarse de  
que el pivote queda  
totalmente fijado. LUBRICAR  
SOLO CON ACEITE WD-40!  
Repasar apriete cada 4  
meses.

(D)


Zapfen besonders fest anziehen und  
sicherstellen, dass er sich nicht  
mehr bewegen kann. ALS  
SCHMIERMITTEL IST NUR ÖL VOM  
TYP (WD 40) ZU VERWENDEN  
Alle 4 Monate Drehmoment  
überprüfen.

(I)

Premere il perno con  
forza. Assicurarsi che il  
perno sia opletamente  
fissato. LUBRIFICARE  
SOLO CON OLIO WD-40!  
Controllare il serraggio  
delle viti ogni 4 mesi..

(F)

Serrer fortement le pivot.  
S'assurer qu'il reste  
totalement fixé.  
AVEC WD-40!  
Vérifier le serrage des  
vis tous les 4 mois.

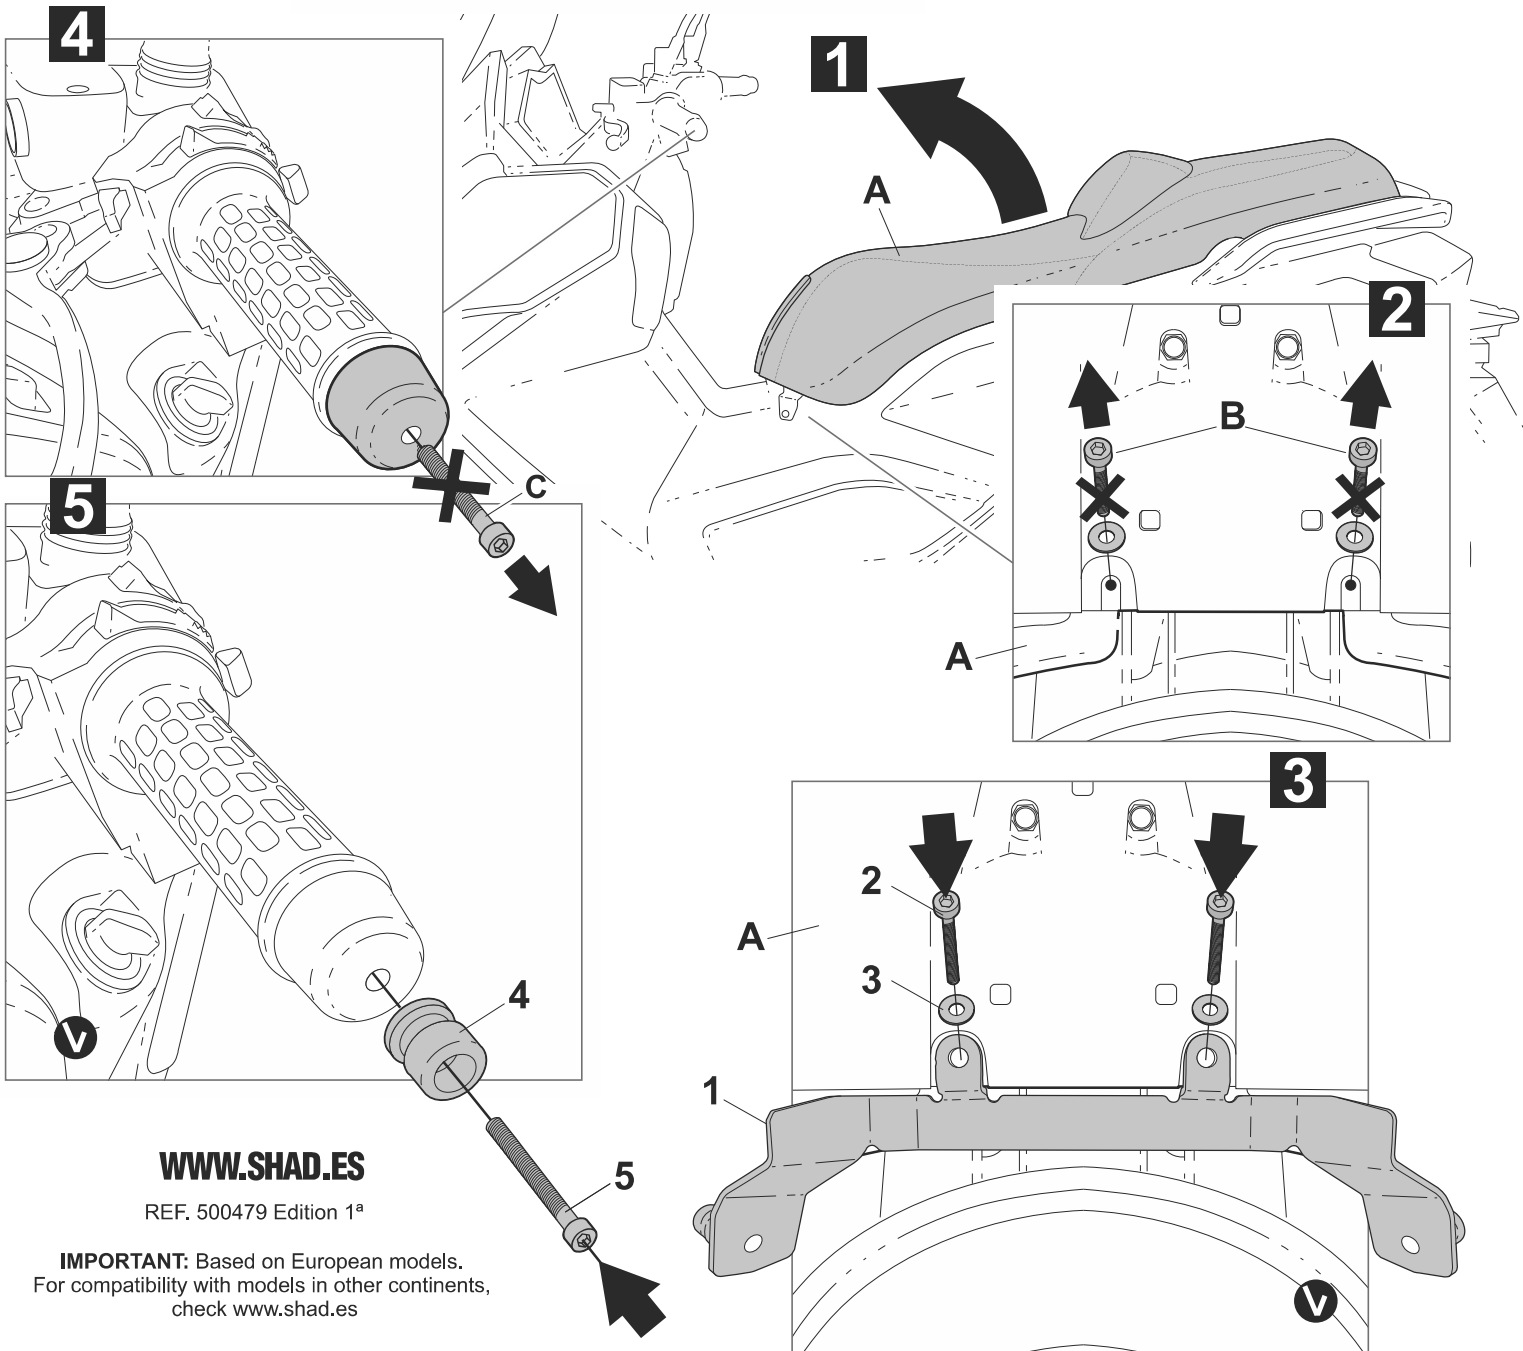

**WWW.SHAD.ES**

REF. 500479 Edition 1ª

**IMPORTANT:** Based on European models.  
For compatibility with models in other continents,  
check [www.shad.es](http://www.shad.es)