

SHAD LOCKS V0PR14SC

BCN



1 263922 x 1

2 263923 x 1

3 262918 x 1



4 262919 x 1
8x6x15



5 304071 x 1
M6X50 DIN 912



6 303000 x 1
Ø6


Tight firmly the pivot.
Make sure that the pivot
is firmly tight.
**LUBRICATE ONLY WITH
WD-40 OIL!**
Check tightness every
4 months.

Apretar el pivote fuertemente. Asegurarse de que el pivote queda totalmente fijado. LUBRICAR SOLO CON ACEITE WD-40 ! Repasar apriete cada 4 meses.

Zapfen besonders fest anziehen und sicherstellen, dass er sich nicht mehr bewegen kann. ALS SCHMIERMITTEL IST NUR ÖL VOM TYP (WD 40) ZU VERWENDEN
Alle 4 Monate Drehmoment überprüfen.

Premere il perno con forza. Assicurarsi che il perno sia completamente fissato. LUBRIFICARE SOLO CON OLIO WD-40! Controllare il serraggio delle viti ogni 4 mesi.

Serrer fortement le pivot.
S'assurer qu'il reste
totalement fixé.
AVEC WD-40!
Vérifier le serrage des
vis tous les 4 mois.

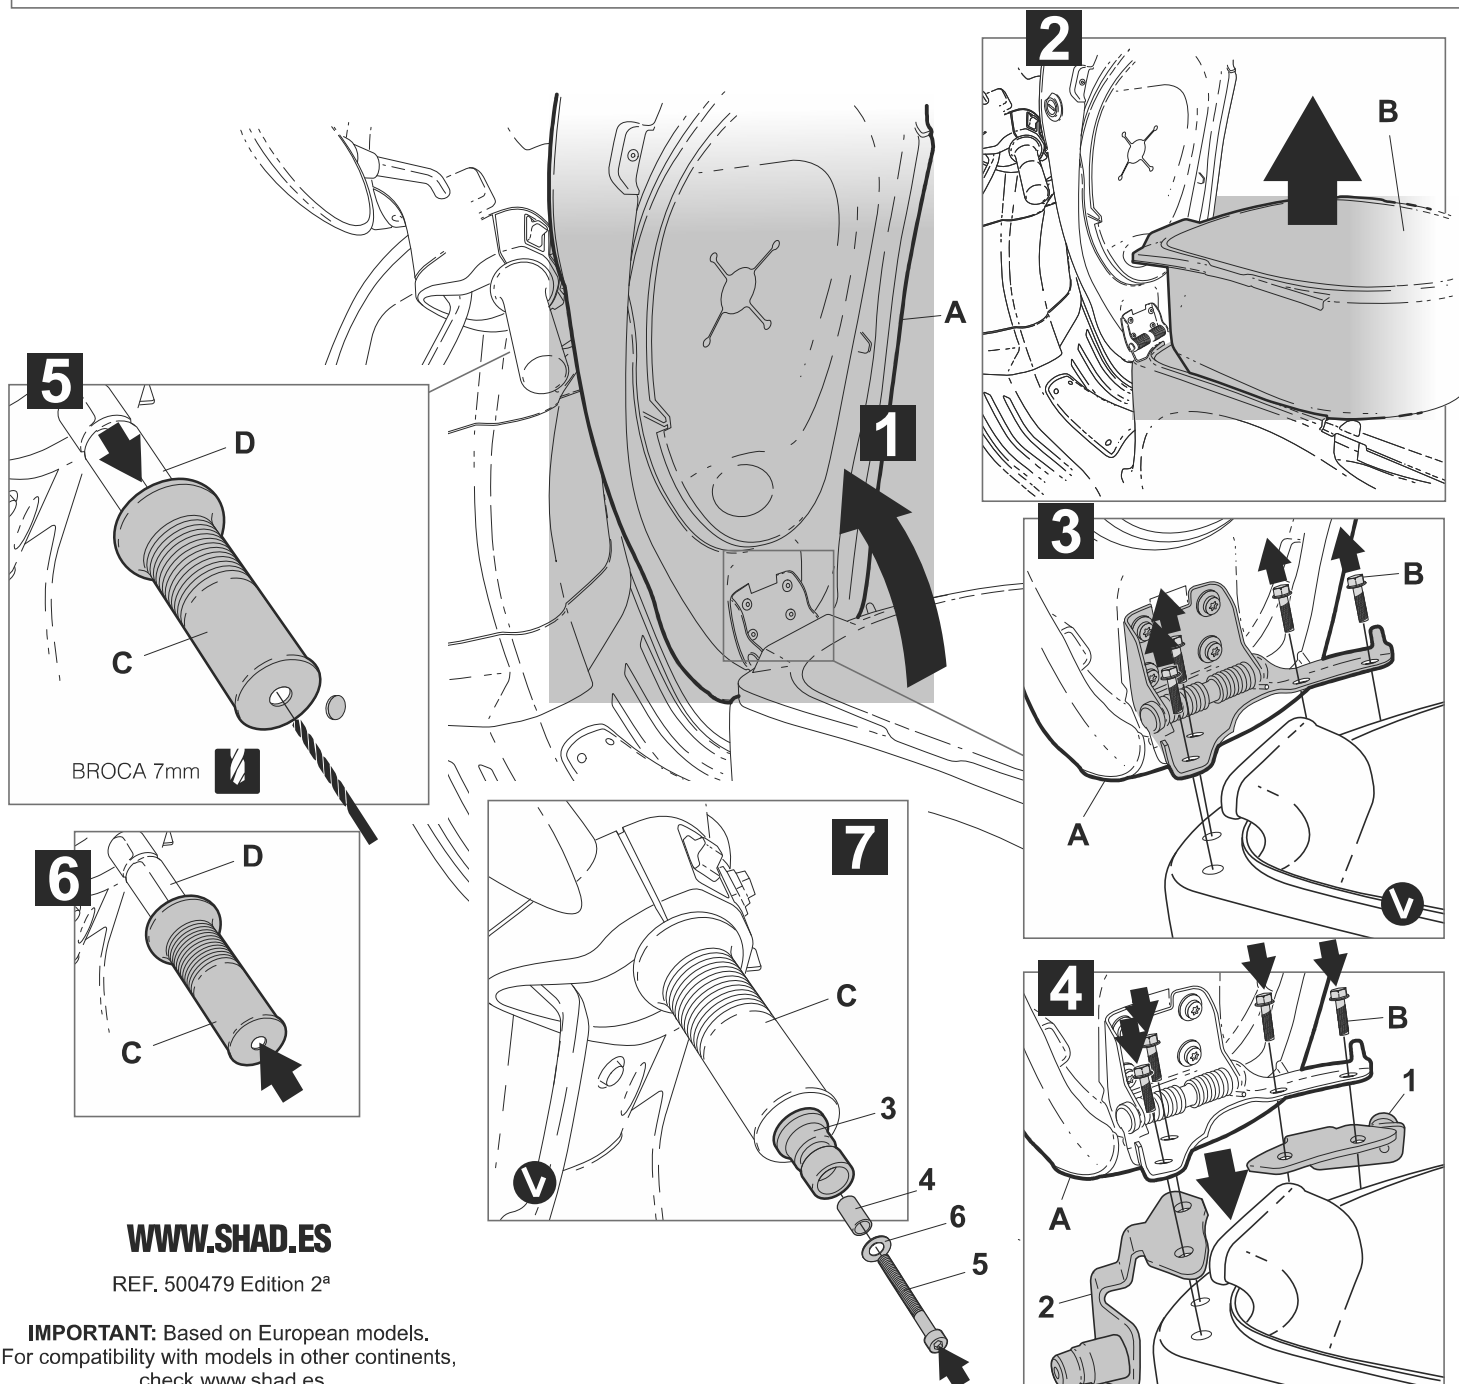

WWW.SHAD.ES

REF. 500479 Edition 2^a

IMPORTANT: Based on European models.
For compatibility with models in other continents,
check www.shad.es