


SHAD

YAMAHA RAY ZR 125 GYCNUS '24


SHAD LOCKS Y0RY14SC

SIZE
5


BCN



1 263501 x 1



2 200527 x 1
0,22 MT



3 400253 x 2
0,68 MT



4 260685 x 2
Ø16 Ø9 x 6



5 303017 x 2
Ø6



6 303099 x 2
Ø6



7 304079 x 2
M6 x 30 DIN 7380



8 263502 x 1




9 262926 x 1
Ø16 X M8 X 13



10 262925 x 1
14 X 18 BAR 68mm



11 262987 x 1



12 304429 x 1
M8 x 100 DIN 912

WARNING! ⚠

(GB)

Tight firmly the pivot.
Make sure that the pivot
is firmly tight.
LUBRICATE ONLY WITH
WD-40 OIL!
Check tightness every
4 months..

(E)

Apretar el pivote
fuertemente. Asegurarse de
que el pivote queda
totalmente fijado. LUBRICAR
SOLO CON ACEITE WD-40 !
Reparar apriete cada 4
meses.

(D)


Zapfen besonders fest anziehen und
sicherstellen, dass er sich nicht
mehr bewegen kann. ALS
SCHMIERMITTEL IST NUR ÖL VOM
TYP (WD 40) ZU VERWENDEN
Alle 4 Monate Drehmoment
überprüfen.

(I)

Premere il perno con
forza. Assicurarsi che il
perno sia ometamente
fissato. LUBRIFICARE
SOLO CON OLIO WD-40!
Controllare il serraggio
delle viti ogni 4 mesi..

(F)

Serrer fortement le pivot.
S'assurer qu'il reste
totalement fixé.
AVEC WD-40!
Vérifier le serrage des
vis tous les 4 mois.

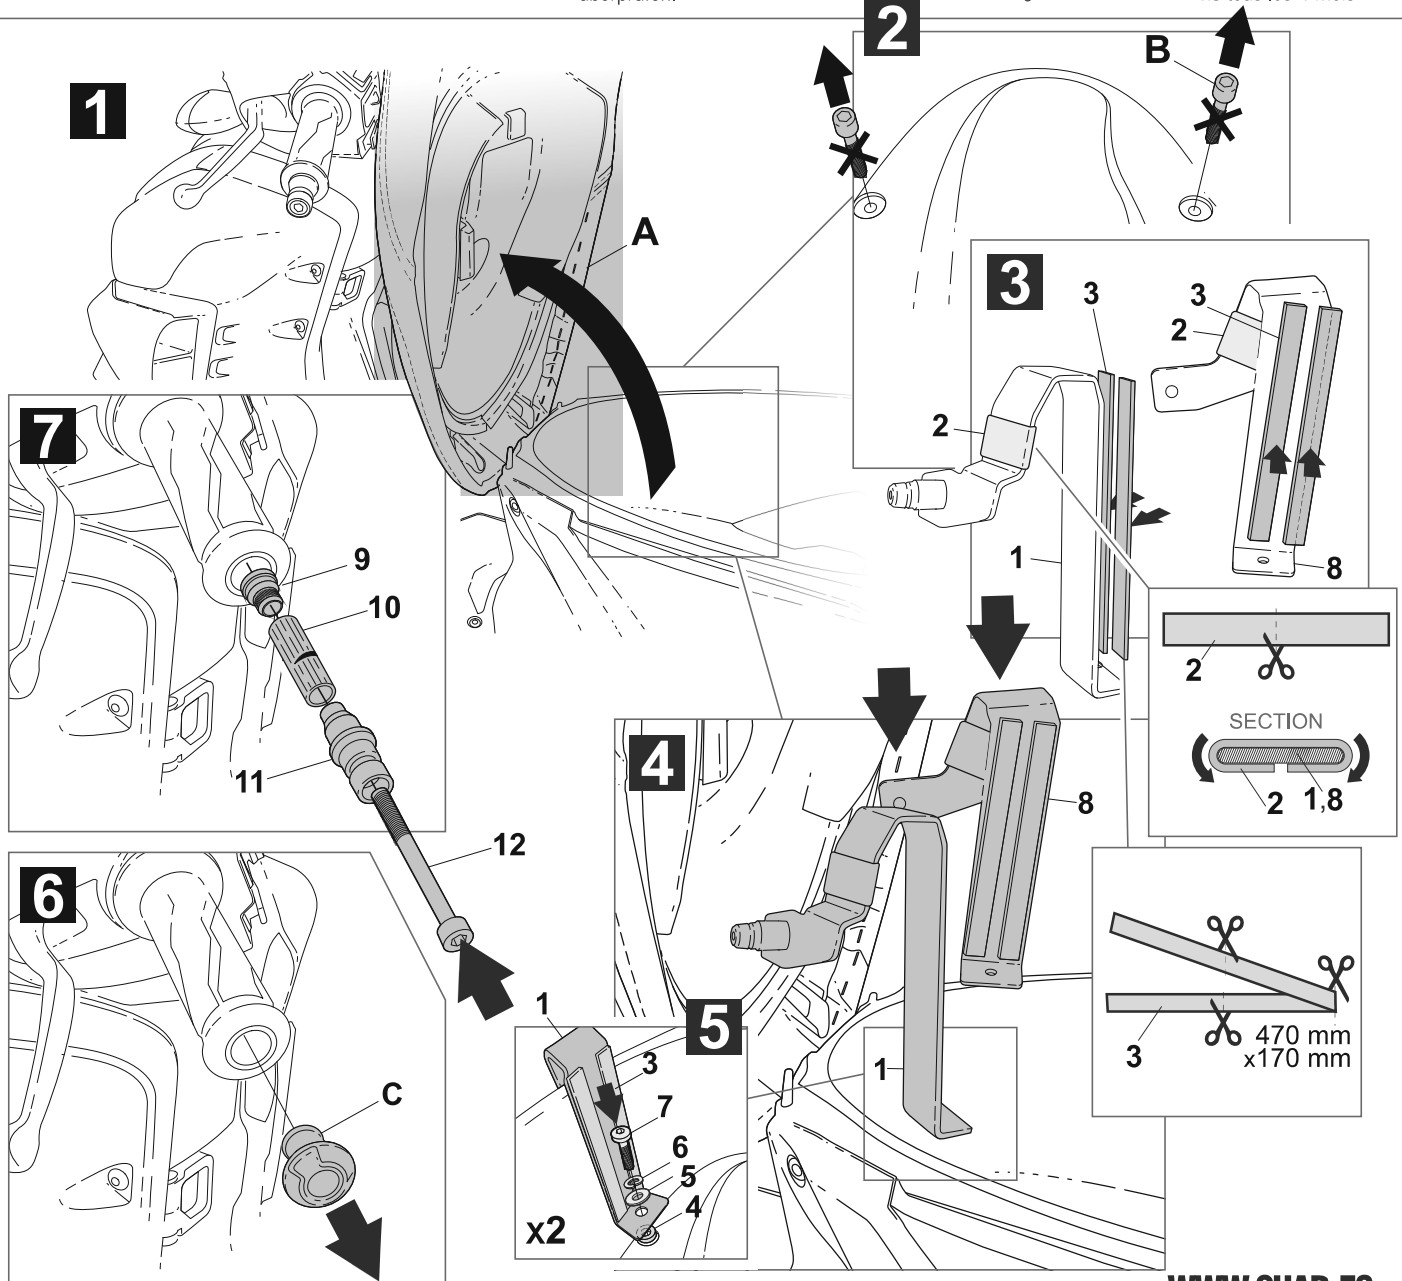

WWW.SHAD.ES

IMPORTANT: Based on European models. For compatibility with models in other continents, check www.shad.es

REF. 500479 Edition 1ª