




SCAN FOR TUTORIAL

style with
BESHARL PANT
+
BESHARL TUNIC

style with
CARLISLE
JEAN


- EASY
- MEDIUM
- CHALLENGING
- EXPERT

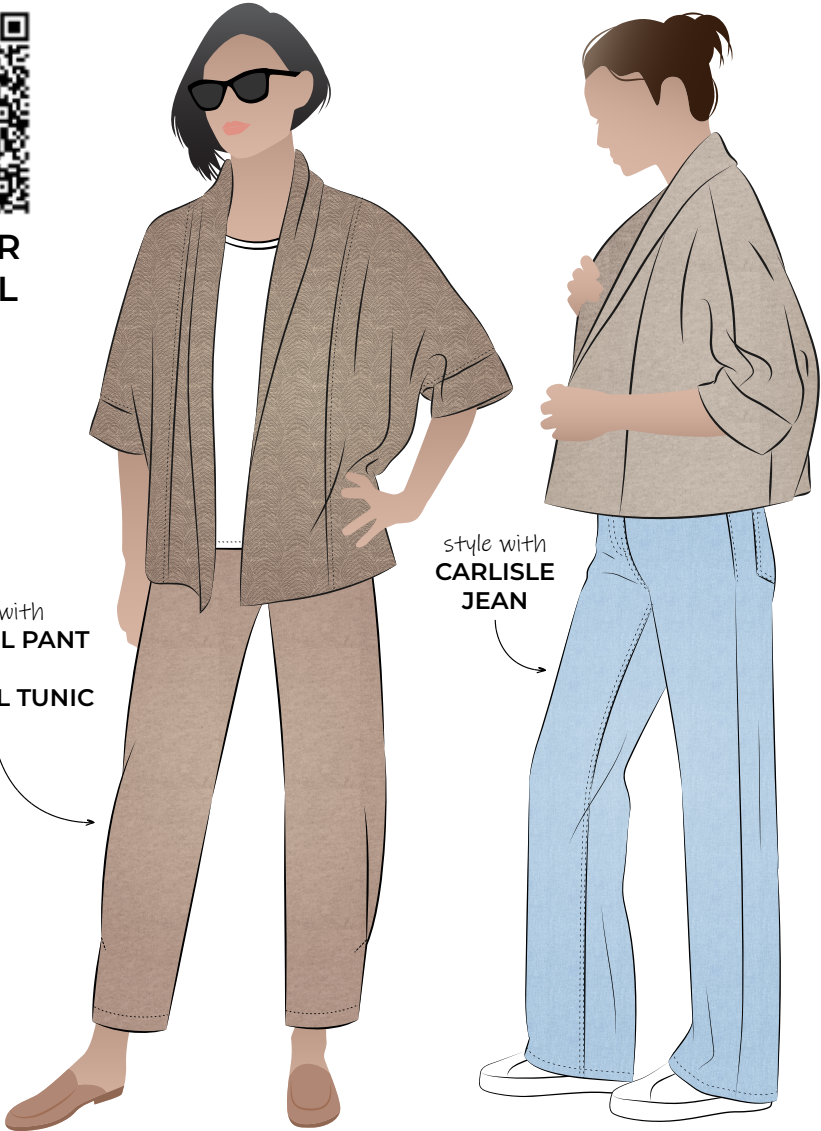

INTERNATIONAL SIZE CONVERSION

AU size	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
US size	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
UK size	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
EUR size	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64

All Style Arc patterns are in Australian (AU) sizes

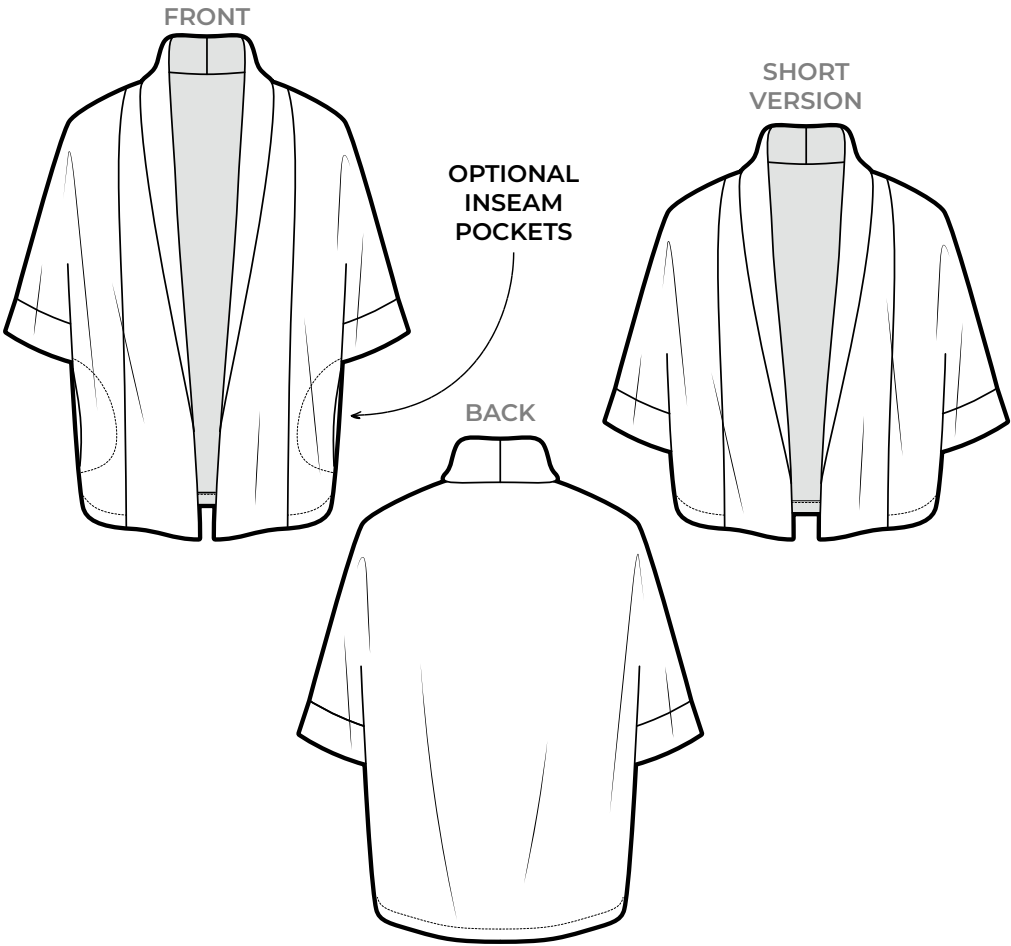

MAIN FABRIC ESTIMATE for short length without pockets

WIDTH	Sizes 4 – 16	Sizes 18 – 30
112 cm / 44 in	1.80 m / 2.00 yds	2.40 m / 2.65 yds
148 cm / 58 in	1.40 m / 1.50 yds	1.70 m / 1.90 yds

MAIN FABRIC ESTIMATE for long length with pockets

WIDTH	Sizes 4 – 16	Sizes 18 – 30
112 cm / 44 in	2.10 m / 2.30 yds	2.70 m / 2.95 yds
148 cm / 58 in	1.70 m / 1.90 yds	2.00 m / 2.20 yds

FABRIC SUGGESTION

Cashmere, merino wool or boiled wool, Ponte, sweater knit or any fabric with drape

TRIMS AND NOTIONS

- Optional - 50mm (2") wide bias binding in contrast or matching colour for the neckband
- Optional - contrasting woven fabric for inseam pockets (long version)


BESHARL JACKET

- Slight cocoon shape
- Dropped back hemline on long version, straight hem on short version
- Shawl collar
- ¾ length sleeve
- Long or short option
- Long version has optional inseam pockets
- Bound inside seam option on neckband

HELPFUL HINTS

- Cut out the pattern taking note of the grains and instructions written on the pattern pieces as this will assist in the construction of your jacket.
- We suggest prewashing your fabric (taking note of the fibre washing recommendations) prior to cutting.
- The seam allowances are 1cm (3/8") for all seams. Seam allowances are marked on each pattern piece with a dashed line.
- Choose if you are making the long version with pockets or the short version before laying the pattern to the fabric.
- Lay the pattern on the fabric and check that the grains are correct. This will ensure the garment hangs straight when on the body. Maximum stretch goes around the body. Pin, mark and cut. Be careful not to clip notches deeper than the seam allowance.
- RST – right sides together
- WST – wrong sides together
- This pattern has been drafted for a B cup bust and a height of 167cm (5'6").
- When finishing your hem, you may choose to use a twin needle.
- Always use a ballpoint/stretch needle when sewing knit fabric.
- You may choose to use clear stay tape in the shoulder seams, front and back necklines to prevent stretching, especially if you are using a loose knit fabric. Cut the tape to size, pin evenly into place, then sew.
- These instructions advise neaten the seams with an overlocker/ serger.
- You may choose to leave the edges raw and press them open, if the fabric is suitable.

FINISHED MEASUREMENTS (CM)	4	6	8	10	12	14	16	18	20	22	24	26	28	30
Bust including folded band	111.0	116.0	121.0	126.0	131.0	136.0	141.0	146.0	152.0	158.0	164.0	170.0	176.0	182.0
Hem circumference including folded band	105.0	110.0	115.0	120.0	125.0	130.0	135.0	140.0	146.0	152.0	158.0	164.0	170.0	176.0
Shoulder breadth including sleeve cuff	85.0	90.0	95.0	100.0	105.0	110.0	115.0	120.0	126.0	132.0	138.0	144.0	150.0	156.0
Centre Back Length from neck seam - Short	52.2	52.8	53.4	54.0	54.6	55.2	55.8	56.4	57.1	57.8	58.5	59.2	59.9	60.6
Centre Back Length from neck seam - Long	68.2	68.8	69.4	70.0	70.6	71.2	71.8	72.4	73.1	73.8	74.5	75.2	75.9	76.6
FINISHED MEASUREMENTS (INCHES)	4	6	8	10	12	14	16	18	20	22	24	26	28	30
Bust including folded band	43 3/4	45 5/8	47 5/8	49 5/8	51 5/8	53 1/2	55 1/2	57 1/2	59 7/8	62 1/4	64 5/8	66 7/8	69 1/4	71 5/8
Hem circumference including folded band	41 3/8	43 1/4	45 1/4	47 1/4	49 1/4	51 1/8	53 1/8	55 1/8	57 1/2	59 7/8	62 1/4	64 5/8	66 7/8	69 1/4
Shoulder breadth including sleeve cuff	33 1/2	35 3/8	37 3/8	39 3/8	41 3/8	43 1/4	45 1/4	47 1/4	49 5/8	52	54 3/8	56 3/4	59	61 3/8
Centre Back Length from neck seam - Short	20 1/2	20 3/4	21	21 1/4	21 1/2	21 3/4	22	22 1/4	22 1/2	22 3/4	23	23 1/4	23 5/8	23 7/8
Centre Back Length from neck seam - Long	26 7/8	27 1/8	27 3/8	27 1/2	27 3/4	28	28 1/4	28 1/2	28 3/4	29	29 3/8	29 5/8	29 7/8	30 1/8

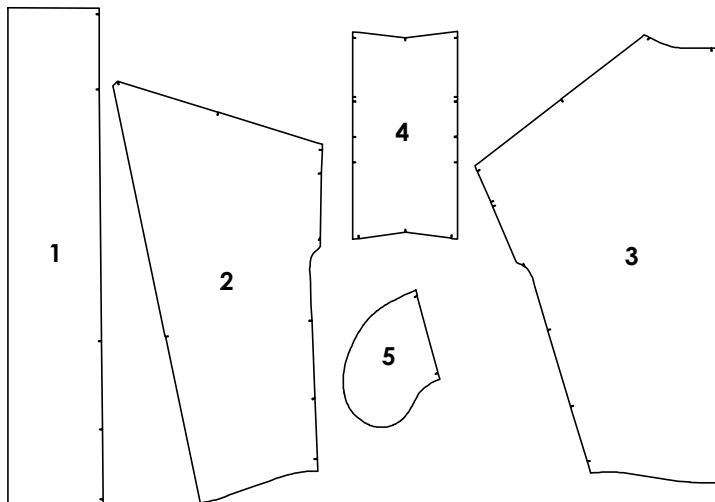


PATTERN PIECES

1. Neckband - cut 1 pair main on the fold
2. Front - cut 1 pair main
3. Back - cut 1 main on the fold
4. Cuff - cut 1 pair main
5. Pockets - cut 2 pairs main


RIGHT SIDE OF
THE FABRIC

WRONG SIDE OF
THE FABRIC


MAIN FABRIC LAY CHART FOR SIZES 4 - 16;
fabric width 148 cm / 58 in;
SHORT length without pockets 1.40 m / 1.50 yds
LONG length with pockets 1.70 m / 1.90 yds

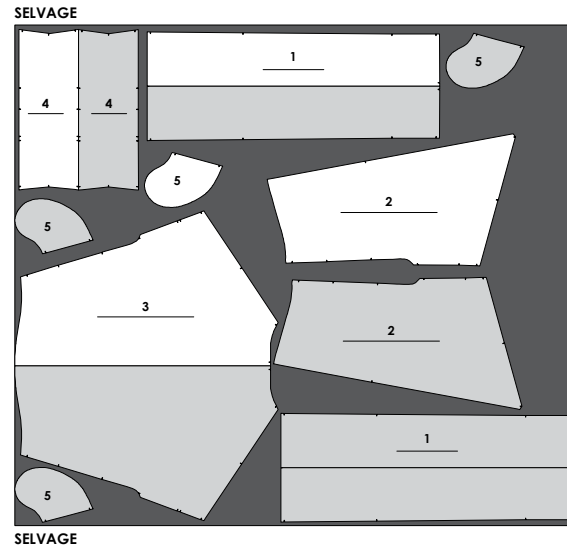



MAIN FABRIC LAY CHART FOR SIZES 18 - 30;
fabric width 148 cm / 58 in;
SHORT length without pockets 1.70 m / 1.90 yds
LONG length with pockets 2.00 m / 2.20 yds

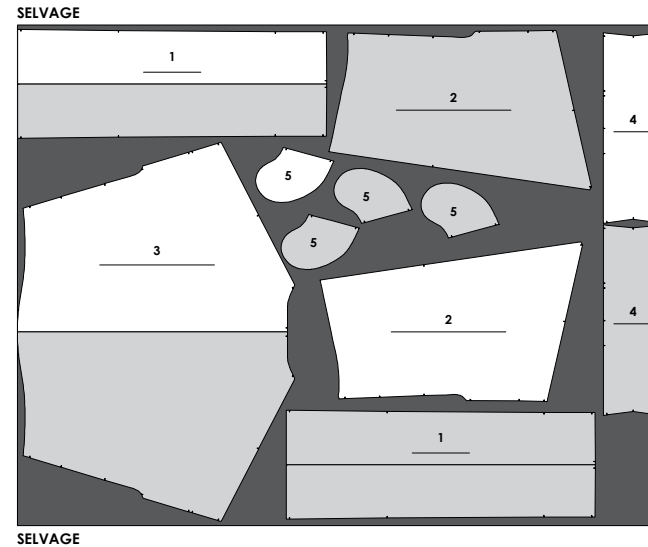

MAIN FABRIC LAY CHART FOR SIZES 4 - 16;
fabric width 112 cm / 44 in;
SHORT length without pockets 1.80 m / 2.00 yds
LONG length with pockets 2.10 m / 2.30 yds

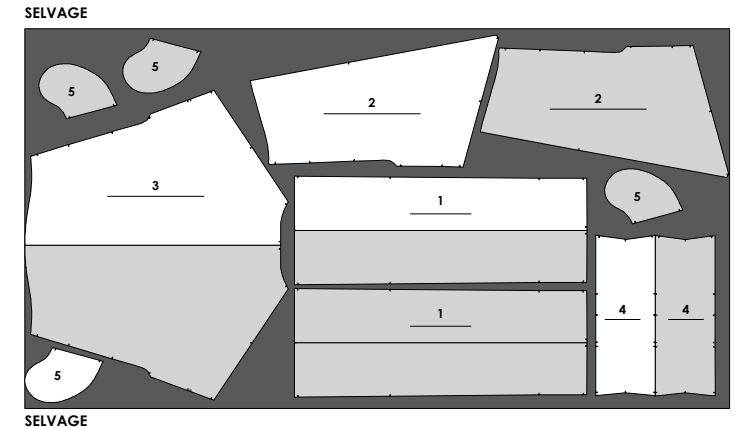


MAIN FABRIC LAY CHART FOR SIZES 18 - 30;
fabric width 112 cm / 44 in;
SHORT length without pockets 2.40 m / 2.65 yds
LONG length with pockets 2.70 m / 2.95 yds

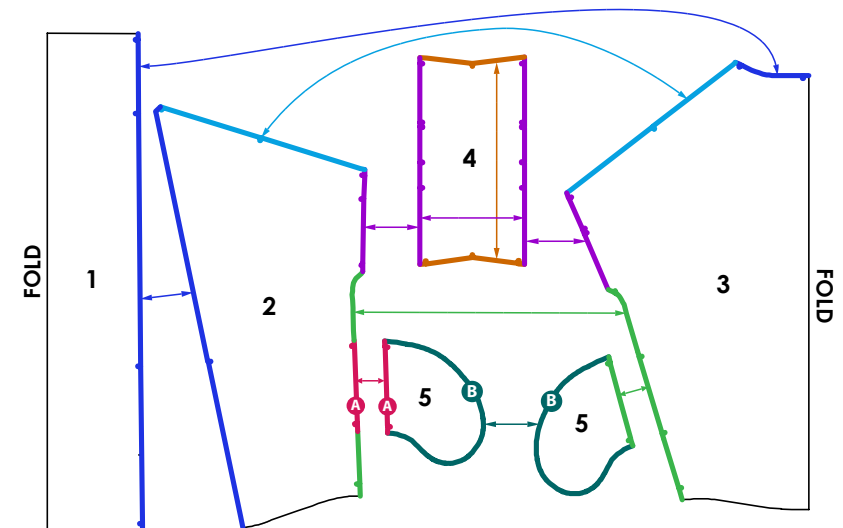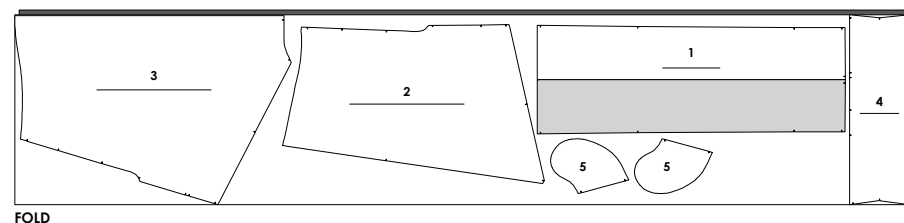

CONSTRUCTION

NECK BAND

1. With RST sew the neckband (1) together at the centre back. Press open.
2. With RST, fold the neckband in half lengthways and sew the short ends. This becomes the hem on the bands. Turn to the right side and baste the raw edges together, taking care not to stretch the fabric as you go. Press and set aside until Step 11.

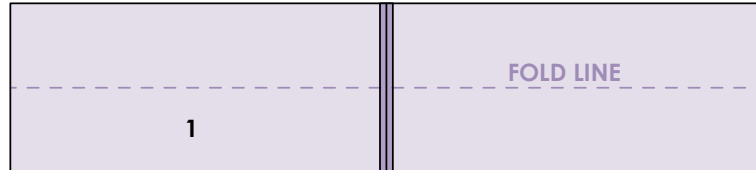


FOLDED EDGE



FOLD NECKBAND IN HALF AND SEW THE SHORT EDGES




TURN OUT AND BASTE THE RAW EDGES

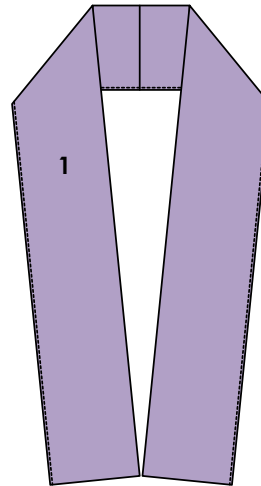


CUFFS

3. With RST, sew the two short ends of the cuffs (4) together, turn out to the right side and fold in half lengthwise.
4. Baste the two raw edges together, taking care not to stretch the fabric as you go. Press and set aside until Step 13.



SEW CUFF SEAM




FOLD CUFF IN HALF AND STAY STITCH BOTH RAW EDGES TOGETHER

SHORT LENGTH WITHOUT POCKETS


5. With RST and aligning notches, sew the front (2) to back (3) at the shoulders. Neaten the seam using an overlocker/serger and press toward the back.
6. With RST, sew the front to back at the side seam. Neaten the seam using an overlocker/serger and press toward the back.

LONG LENGTH WITH POCKETS


7. With RST and aligning notches, sew one set of the pockets (5) to the front side seam. Clip at the notches and under stitch the seam on the side of the pocket bag.
8. With RST, lay pocket bag 2 on top of pocket bag 1, align and sew both pocket bags together. Note that the straight edge of the under pocket is left free to sew to the back-body's side seam. Neaten the outer edge of the pockets with an overlocker/serger. Carefully pin the pocket into place inside of the front of the jacket and top stitch.
9. With RST and aligning notches, sew the front to back at the shoulders. Neaten the seam using an overlocker/serger and press toward the back.
10. With RST, pin the front to back at the side seam. Sew along the side seam, through the straight edge of the back pocket to the hem. Take care not to catch the pocket opening as you go. Neaten the seam using an overlocker/serger and press toward the back.




A). SEW POCKET BAG TO FRONT




B). CLIP AT NOTCHES



C). SEW AN UNDERSTITCH ON THE SIDE OF THE POCKET BAG



D). LAY ANOTHER POCKET BAG ON TOP, ALIGN AND SEW BOTH POCKET BAGS TOGETHER



FINISHED POCKET.


E). SECURE-STITCH EACH ENDS OF POCKET OPENING, TOP-STITCH POCKET BAGS TO MAIN

MAIN BODY


11. With RST and aligning notches, pin the neck band to the neck edge of the body. The bottom edge of the band will sit at the notch, 2cm (3/4") up from the raw edge. Sew the neckband to the body with a 1cm (3/8") seam.
12. Take your pre-prepared (optional) binding strip and pin it along the neck seam. Sew the binding, then press toward the seam. Fold under 1cm (3/8"), then again, encasing the seam, pin into place. Sew the binding. Otherwise, neaten using an overlocker/serger and press towards the body.

COMPLETION


13. With the jacket turned inside out, position the cuffs inside the sleeve opening with RST and align notches. Sew then neaten the seam using an overlocker/serger and press towards the body.
14. Neaten the hem using an overlocker/serger, turn up 2cm (3/4") covering the band seam, and sew into place by hand or machine. Trim off any loose threads and carefully press your new jacket!

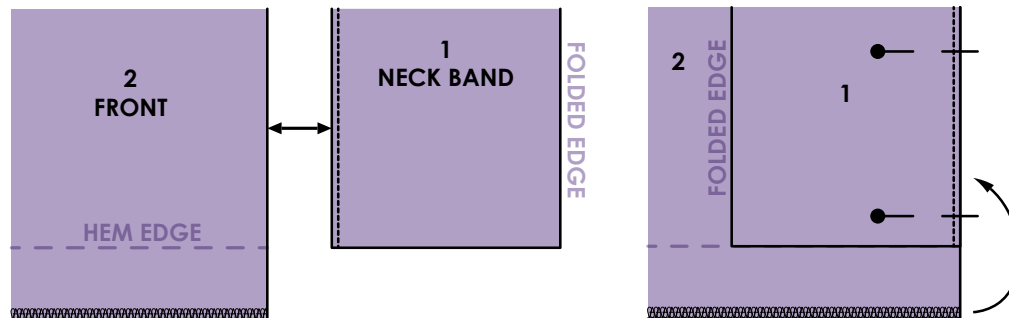


**PIN NECK BAND (1) TO THE
NECK EDGE OF THE FRONT (2),
FOLD HEM EDGE IN**




**SEW NECK EDGE, THEN NEATEN
WITH OVERLOCKER/SERGER
OR WITH THE BINDING STRIP**

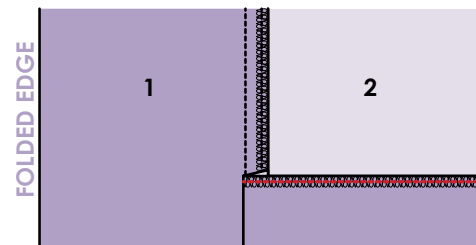

**TOP-STITCH THE HEM OF THE
BODY TO FINISH THE
BOTTOM EDGE**

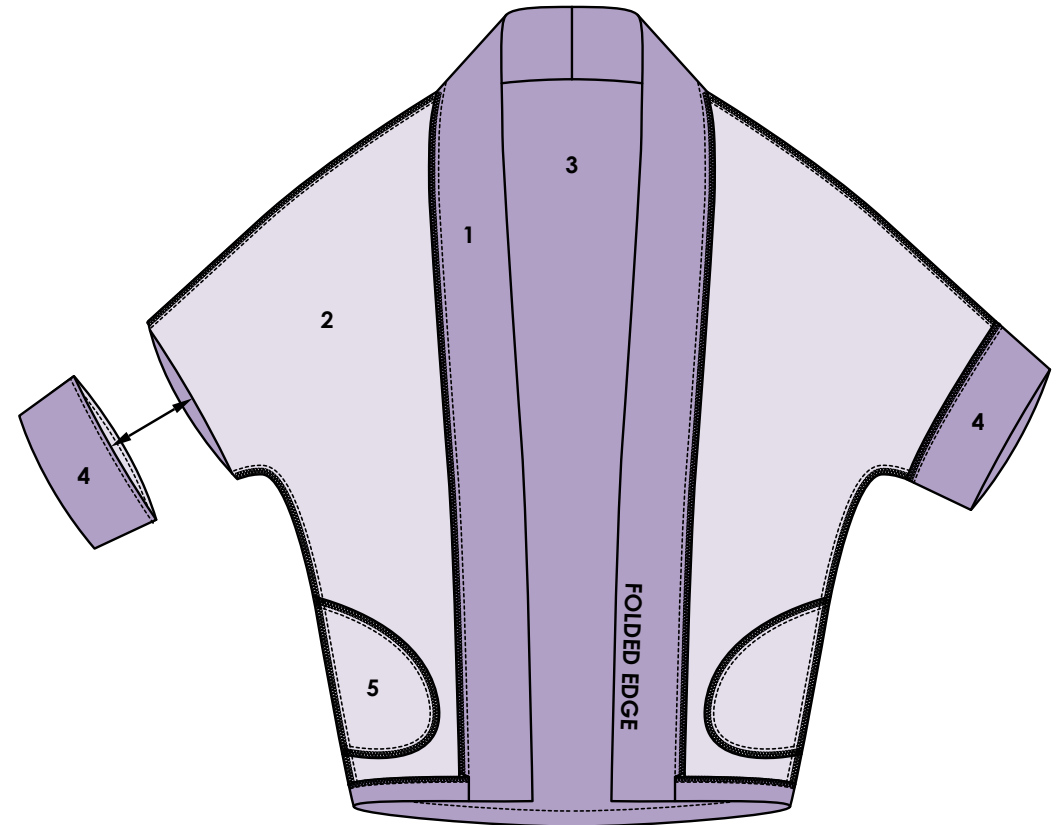

**LONG LENGTH
JACKET WITH
POCKETS**

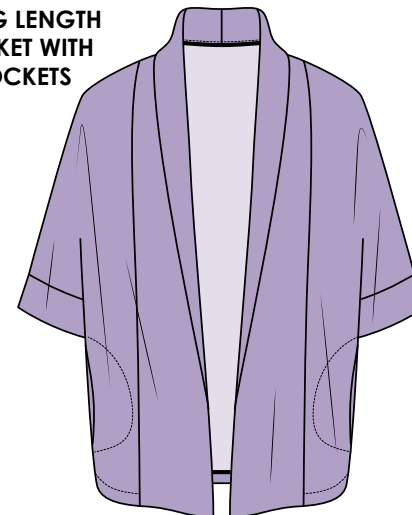

**SHORT LENGTH
JACKET WITHOUT
POCKETS**

