

McCall's[®] by design_{group} M8347



>> MISSES' PONCHO
SKILL LEVEL: AVERAGE




PDF PATTERNS

THINGS YOU NEED:

> **A:** Five medium snaps. **C:** Five ¾" (2cm) buttons.

SUGGESTED FABRICS:


> Wool Blends, Flannel, Fleece, Ripstop. **Interfacing:** Lightweight Fusible.

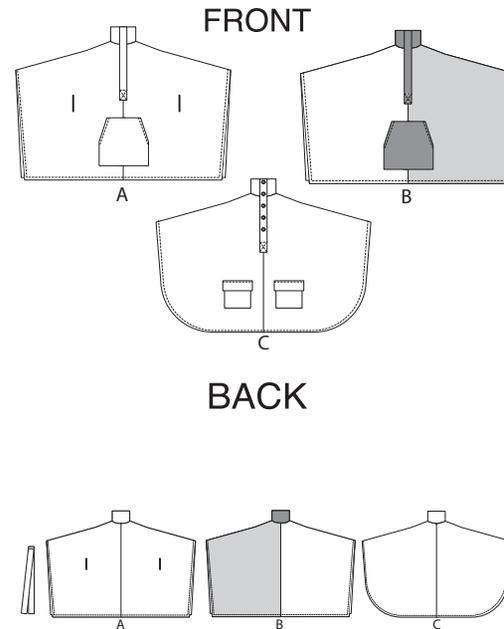

Your printed tile pieces should be assembled before you move on to this step!

PIECES (9)

- 1 FRONT-ABC
- 2 POCKET-AB
- 3 BACK-ABC
- 4 COLLAR-ABC
- 5 RIGHT PLACKET-ABC
- 6 LEFT PLACKET-ABC
- 7 BELT-A
- 8 FLAP-C
- 9 POCKET-C

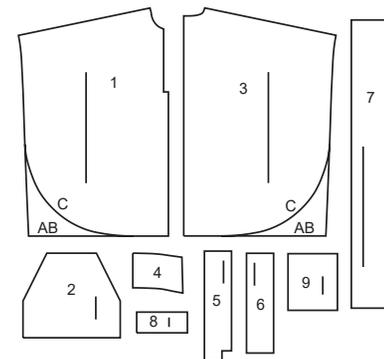

YARDAGE CHARTS

SIZES	XS	S	M	L	XL	XXL	
	(4-6)	(8-10)	(12-14)	(16-18)	(20-22)	(24-26)	
INTERFACING A,B,C- 20" (51cm)- 5/8 yd. (0.6m.)							
PONCHO AND BELT A							
60"*	27/8	3	3	31/8	37/8	4	yds.
150cm*	2.7	2.8	2.8	2.9	3.6	3.7	m.
PONCHO B							
60"*	11/8	11/8	11/8	11/8	11/4	11/4	yds.
150cm*	1.1	1.1	1.1	1.1	1.1	1.2	m.
CONTRAST 1 (LEFT FRONT AND LEFT BACK)							
60"*	11/8	11/8	11/8	11/8	11/4	11/4	yds.
150cm*	1.1	1.1	1.1	1.1	1.1	1.2	m.
CONTRAST 2 (POCKET, COLLAR AND PLACKET)- 60" (150cm)*- 5/8 yd. (0.6m.)							
PONCHO C							
60"*	21/4	21/4	23/8	23/8	23/8	21/2	yds.
150cm*	2.1	2.1	2.2	2.2	2.2	2.3	m.

FINISHED GARMENT MEASUREMENTS



SIZES	XS	S	M	L	XL	XXL	
	(4-6)	(8-10)	(12-14)	(16-18)	(20-22)	(24-26)	
FINISHED BACK LENGTH FROM BASE OF NECK							
PONCHO A,B,C	321/2	33	331/2	34	341/2	35	ins.
	83	84	85	86	88	89	cm.

BODY MEASUREMENTS

SIZES	XS	S	M	L	XL	XXL	
	(4-6)	(8-10)	(12-14)	(16-18)	(20-22)	(24-26)	
BUST	291/2-301/2	311/2-321/2	34-36	38-40	42-44	46-48	ins.
	75-77	80-83	87-92	97-102	107-112	117-122	cm.
WAIST	22-23	24-25	261/2-28	30-32	34-37	39-411/2	ins.
	56-58	61-64	67-71	76-81	87-94	99-105	cm.
HIP	311/2-321/2	331/2-341/2	36-38	40-42	44-46	48-50	ins.
	80-83	85-88	92-97	102-107	112-117	122-127	cm.
BACK WAIST LENGTH	151/4-151/2	153/4-16	161/4-161/2	163/4-17	171/4-171/2	173/4-18	ins.
	39-39.5	40-40.5	41.5-42	42.5-43	44-44.5	45-45.5	cm.


CUTTING AND MARKING

- > **SHRINK FABRIC** if not labeled pre-shrunk. Press.
- > **CIRCLE LAYOUT** for View, Size, Fabric Width.
- > Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.
- > For **DOUBLE THICKNESS (WITH FOLD)**, fold fabric with right sides together.
- > ***DOUBLE THICKNESS (WITHOUT FOLD)**, for fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).
- > For **SINGLE THICKNESS**, place fabric right side up. (For Fur Pile fabrics, place pile side down.)

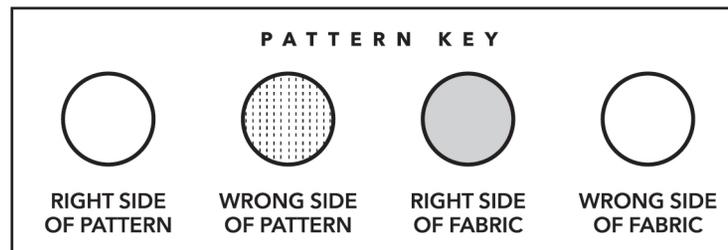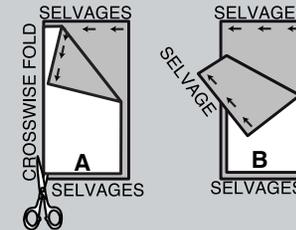

- > Before **CUTTING**, place all pieces on fabric according to layout. Pin.
(Layouts show approximate position of pattern pieces; position may vary according to your pattern size.)
- > ★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. Cut piece on single layer of fabric with piece face up on right side of fabric.
- > Cut accurately, cutting notches outward.
- > Before removing pattern, **TRANSFER MARKINGS** and lines of construction to **WRONG SIDE** of fabric, using Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be thread traced.
NOTE: Broken-line boxes (a! b! c!) in layouts represent pieces cut by measurements provided.
- > Prewash your fabric using a method that's suitable for the fabric type.
- > Fold fabric with right sides together, matching **SELVAGES**.
- > Pin your pattern pieces to the fabric as shown below and cut them out using a sharp pair of dressmaker's shears.

PATTERN MARKINGS

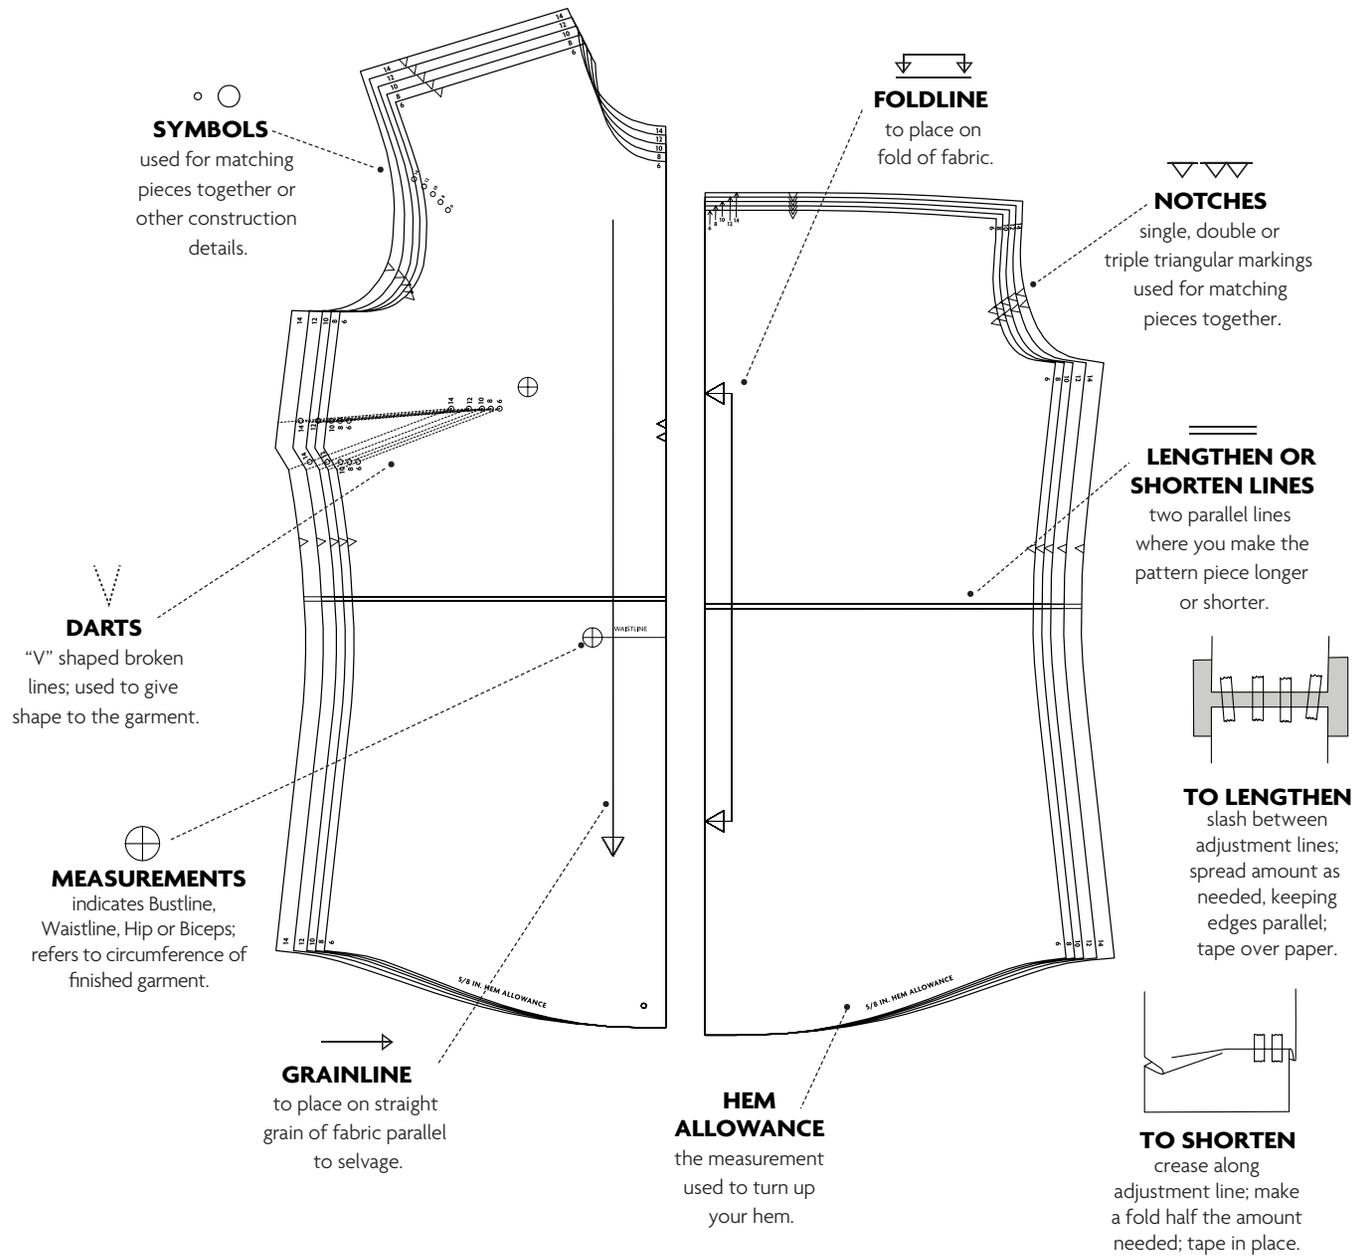


CUTTING LAYOUTS


PONCHO AND BELT A

use pieces: 1 2 3 4 5 6 7

60" (150 cm)
with nap
sizes XS-S-M-L

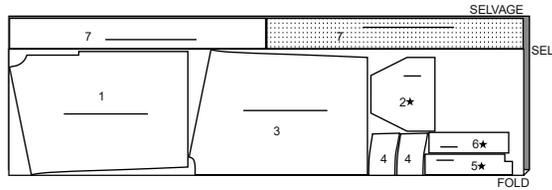


60" (150 cm)
with nap
sizes XL-XXL

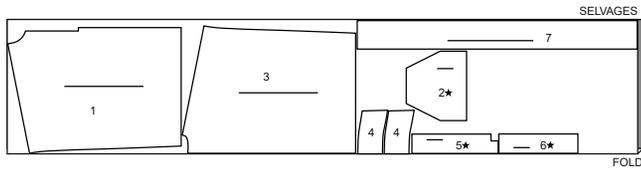

INTERFACING A,B

use pieces: 4 5 6


20" (51 cm)
without nap
all sizes

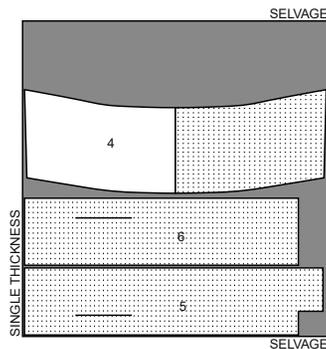

PONCHO B

use pieces: 1 3


60" (150 cm)
with nap
all sizes

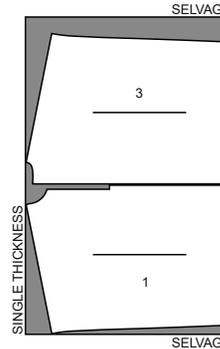

CONTRAST 1 (LEFT SIDE)

use pieces: 1 3


60" (150 cm)
with nap
all sizes

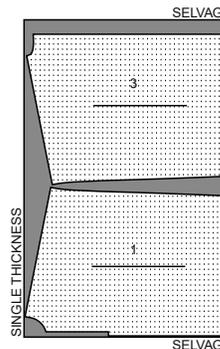

CONTRAST 2 (POCKET, COLLAR AND PLACKET)

use pieces: 2 4 5 6


60" (150 cm)
with nap
all sizes

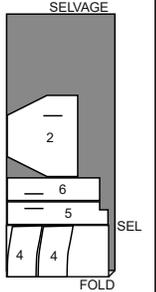

PONCHO C

use pieces: 1 3 4 5 6 8 9


60" (150 cm)
with nap
all sizes

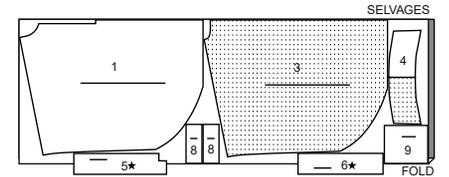

INTERFACING C

use pieces: 4 5 6 8

20" (51 cm)
without nap
all sizes

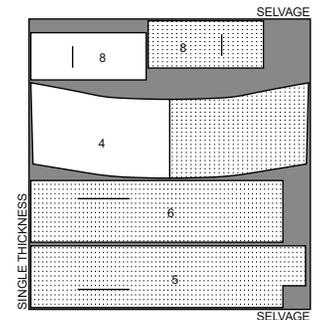

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

SEWING INFORMATION


5/8" (1.5cm) SEAM ALLOWANCES ARE INCLUDED,
(unless otherwise indicated)

ILLUSTRATION SHADING KEY

Right Side	Wrong Side	Interfacing	Lining	Underlining

Pin or baste seams, right side together, matching notches. Fit garment before stitching major seams.

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.



GLOSSARY

Sewing terms appearing in **BOLD TYPE** in Sewing Instructions are explained below.

EDGESTITCH - Stitch close to finished edge or seam.

NARROW HEM - Turn in hem; press, easing in fullness if necessary. Open out hem. Turn in again so raw edge is along crease; press. Turn in along crease, stitch.

REINFORCE - Stitch along seamline where indicated in sewing instructions, using small machine stitches.

SLIPSTITCH - Slide needle through a folded edge, then pick up a thread of underneath fabric.

STAYSTITCH - Stitch 1/8" (3mm) from seamline in seam allowance (usually 1/2" (13mm) from raw edge).

TOPSTITCH - On outside, stitch 1/4" (6mm) from edge, seam or previous stitching, using presser foot as guide, or stitch where indicated in instructions.

UNDERSTITCH - Open out facing or underside of garment; stitch to seam allowance close to seam.


SEWING DIRECTIONS

PONCHO A, B, C AND BELT A

NOTE: The first view mentioned will be shown, unless otherwise indicated.


INTERFACING

1. Pin **INTERFACING** to wrong side of each matching **FABRIC** section. Fuse, following manufacturer's instructions.

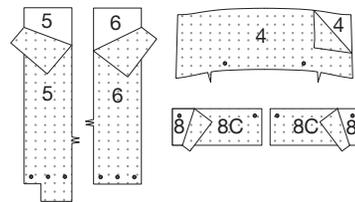


FRONT AND BACK

2. Stitch **FRONT** (1) sections together at center front.

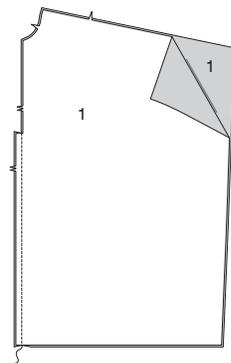


3. Stitch **BACK** (3) sections together at center back.

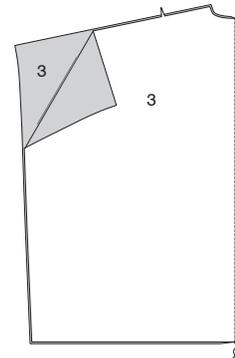


View A

4. To reinforce underside of belt openings, cut four rectangles of fusible interfacing, each 1" x 3-1/2" (2.5cm x 9cm). Fuse interfacing to wrong side of front and back, centering over markings.

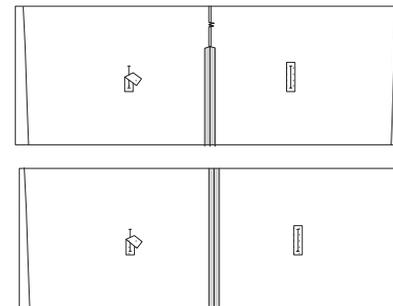


5. Stitch 1/8" (3mm) on both sides of vertical solid line, squaring stitching at ends, as shown. Slash along solid line.




Views A, B


6. Finish slanted edges of **POCKET** (2) with 5/8" (1.5cm) **NARROW HEM**.



7. Press under 5/8" (1.5cm) on upper, side and lower edges of pocket.




8. Pin pocket to front along placement lines, matching centers, small and large dots. **EDGESTITCH** upper, sides and lower edge, leaving slanted edge free between dots.

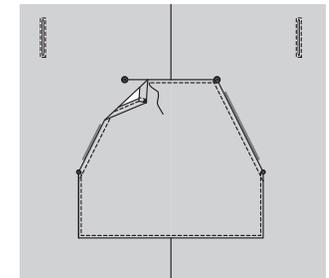


View C


9. Turn in 1/4"(6mm) on upper edge of each POCKET (9). Press.




10. Turn upper edge to outside along foldline. Stitch ends. Trim.



11. Turn upper edge of pocket to inside, turning in remaining seam allowances and diagonally folding corner. Press. Baste close to inner pressed edge. **TOPSTITCH** along basting.



12. Pin pocket to front matching large dots. Stitch side and lower edges.

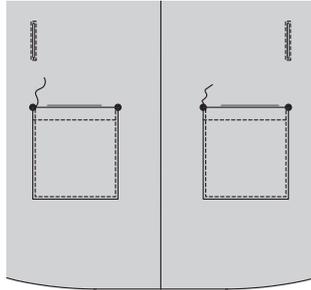


13. For each flap, stitch un-interfaced FLAP (8) to interfaced flap sections, leaving upper edge open. Trim.




14. Turn right side out. Press. Baste raw edges together.




15. On outside, pin flap to front, matching small dots, baste. Stitch. Trim flap seam allowance to a scant 1/4"(6mm), being careful not to cut front.

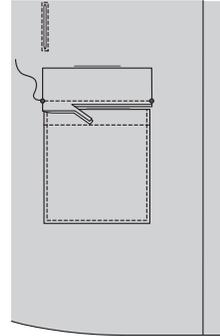

16. Turn flap down, press. **TOPSTITCH** upper edge of flap, encasing trimmed edge.

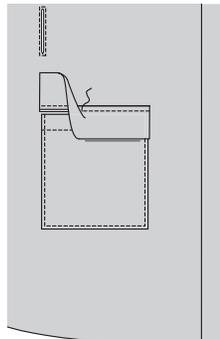


17. Views A, B, C: Stitch back and front together at shoulders.

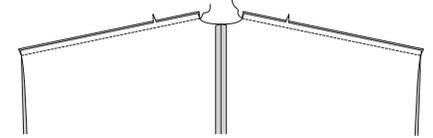


COLLAR


18. STAYSTITCH neck edge of poncho.

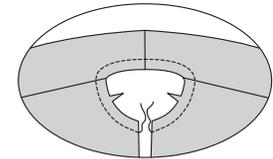


19. Turn in notched edge of interfaced COLLAR (4) section. Press. Trim pressed edge to 3/8"(1.3 cm). This will be the collar facing.



20. Stitch collar sections together at upper edge. Trim. **UNDERSTITCH** collar facing.




21. Pin collar to neck edge, matching center backs, notches, and small dots to shoulder seam, clipping neck edge of poncho, as needed. Stitch, keeping facing free. Trim. Press seam toward collar.




22. Turn facing down. **SLIPSTITCH** pressed edge over seam. Baste ends.

EDGESTITCH collar close to neck seam.

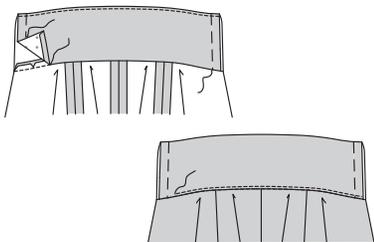


FRONT PLACKET


23. REINFORCE front through small dots as shown. Clip to small dots.




24. Turn in 5/8" (1.5cm) seam allowance on long unnotched edge of **RIGHT PLACKET (5)** and **LEFT PLACKET (6)**. Press. Trim pressed edge to 3/8" (1.3cm).




25. With right sides together, pin right placket to front, matching symbols and having raw edges even. Stitch to small dots. Trim. Press seam toward placket, continuing to press under remaining seam allowance below small dot.

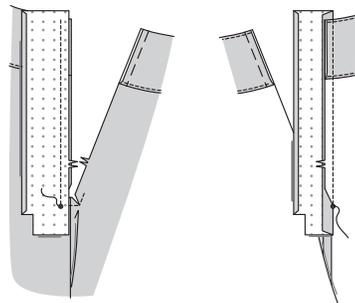

26. Fold upper edge of right placket along foldline, right sides together. Stitch upper edge.

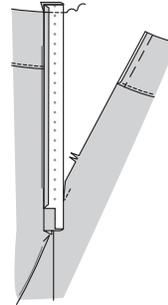


27. Turn placket to inside along foldline, press. **SLIPSTITCH** pressed edge over seam.


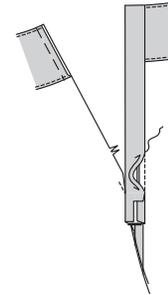


28. Apply left placket to front in same manner.


EDGESTITCH plackets along seam, as shown.

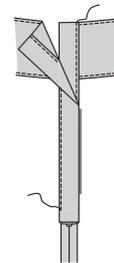


29. Pin left placket to lower end of front opening, as shown. Stitch between small dots, keeping right placket free. Press seam down.

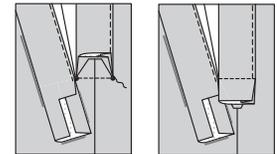

30. Turn under 5/8" (1.5cm) seam allowance on lower edge of right placket. Press.




31. On outside, lap right placket over left placket, matching centers, and small dots. **EDGESTITCH** lower edge of placket through all thicknesses, as shown. Stitch along stitching lines.

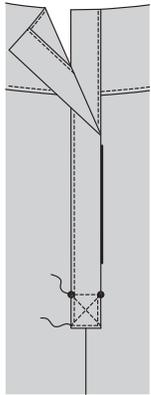


FINISHING

View A


32. Stitch BELT (7) sections together along notched edge.

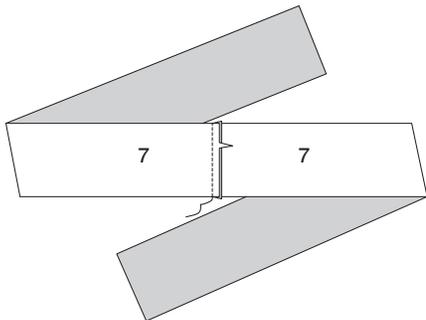


33. With right sides together, fold belt along foldline. Stitch, leaving an opening. Trim.

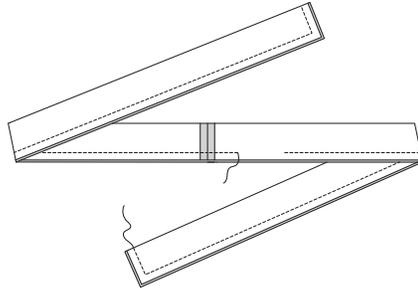

34. Turn. Press. **SLIPSTITCH** opening. To wear, slip belt through openings and tie belt around waist.

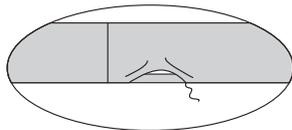

35. Sew socket section of snap to outside of left placket at markings. Lap right placket over left and mark placements for ball sections. Sew ball sections of snap to markings.

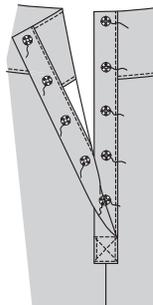


36. Views A, B: Make a 5/8" (1.5cm) **NARROW HEM** on side edges of poncho. Make a 5/8" (1.5cm) **NARROW HEM** on lower edges of poncho.




View C


37. Make buttonholes in right placket at markings. Sew buttons to left placket under buttonholes.

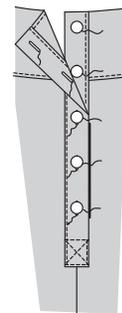

38. Machine-baste curved edges of poncho 1/4" (6mm) from raw edge.

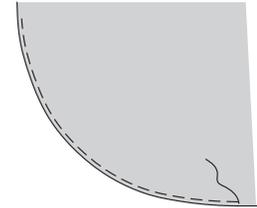

39. Make a 5/8" (1.5cm) **NARROW HEM** on outer edges of poncho, pulling up thread to ease in fullness on curve.

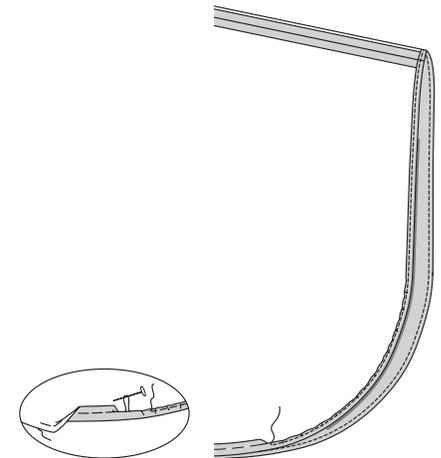



Congrats!

You've completed your sewing adventure!

**SHARE
YOUR** look!



Post your pattern and tag us at
@MCCALLPATTERNCOMPANY and use #mccallpatterns
for a chance to be featured on our social media!

Look for more McCall's PDF patterns at **McCallPattern.com**

 1-800-255-2762

© 2022 IG Design Group Americas, Inc. | All Rights Reserved
Sold for individual home use only and not for commercial or manufacturing purposes.