

McCall's

M8436

Brandi
by JOAN



Scan QR code for a Sew-Along video tutorial.
Scannez le code QR pour un didacticiel vidéo de couture.



Average

MISSES' KNIT DRESS IN TWO LENGTHS

Suggested Fabrics: Stretch Knits only (50% Stretch) such as Interlock, Jersey, Rib Knit, Sweater Knits. See Stretch Gauge.

Notions: A,B: ¾ yd. (0.8m) of ½" (1.3cm) bra band elastic, 2¼ yds. (2.1m) of ¼" (6mm) elastic.

Sizes	6	8	10	12	14	16	18	20	22	24
European	32	34	36	38	40	42	44	46	48	50

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	30½	31½	32½	34	36	38	40	42	44	46	Ins.
Waist	23	24	25	26½	28	30	32	34	37	39	"
Hip-9" below waist	32½	33½	34½	36	38	40	42	44	46	48	"
Back-neck to waist	15½	15¾	16	16¼	16½	16¾	17	17¼	17½	17¾	"

Dress A

60"*	1%	1%	1%	1%	2	2	2½	2¼	2¼	2¼	Yds.
------	----	----	----	----	---	---	----	----	----	----	------

Dress B

60"*	2¾	2¾	2¾	2¾	2¾	2¾	3½	3½	3½	3½	Yds.
------	----	----	----	----	----	----	----	----	----	----	------

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B Bust	30	31	32	33½	35½	37½	39½	41½	43½	45½	Ins.
A,B Waist	25	26	27	28½	30½	32½	34½	36½	38½	40½	"
A,B Hip	35½	36½	37½	39	41	43	45	47	49	51	"
Finished back length from base of neck											
Dress A	34½	34¾	35	35¼	35½	35¾	36	36¼	36½	36¾	Ins.
Dress B	51½	51¾	52	52¼	52½	52¾	53	53¼	53½	53¾	"

*with nap **without nap

Moins Facile

ROBE EN TRICOT EN DEUX LONGUEURS POUR JEUNES FEMMES

Tissus Conseillés: Tricot extensibles seulement (50% d'élasticité) tels que Interlock, Jersey, Tricot à côtes, Tricot pour chandail. Reportez-vous au taux d'élasticité.

Mercerie: A,B: 0.8m d'élastique pour soutien-gorge de 1.3cm, 2.1m d'élastique de 6mm.

Tailles	6	8	10	12	14	16	18	20	22	24
Françaises	34	36	38	40	42	44	46	48	50	52
Européen	32	34	36	38	40	42	44	46	48	50

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	78	80	83	87	92	97	102	107	112	117	cm
Taille	58	61	64	67	71	76	81	87	94	99	"
Hanches (23cm au-dessous de la taille)	83	85	88	92	97	102	107	112	117	122	cm
Dos du cou à la taille	39.5	40	40.5	41.5	42	42.5	43	44	44.5	45	"

Robe A

150cm*	1.6	1.7	1.7	1.7	1.7	1.8	1.9	1.9	2.1	2.1	m
--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

Robe B

150cm*	2.5	2.5	2.5	2.5	2.5	2.5	2.5	3.2	3.2	3.3	m
--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B Poitrine	76	79	81	85	90	95	100	105	110	116	cm
A,B Taille	64	66	69	72	77	83	88	93	98	103	"
A,B Hanches	90	93	95	99	104	109	114	119	124	130	"
Longueur finie – dos, votre nuque à l'ourlet											
Dress A	88	88	89	90	90	91	91	92	93	93	cm
Dress B	131	131	132	133	133	134	135	135	136	137	"

*avec sens **sans sens



A



B

Use the 1 inch (2.54cm) box to ensure you are using rule at 100%


Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.


4" of crosswise folded knit must **STRETCH** from here
10 cm de tricot plié sur le travers doivent s'étire d'ici
10 cm de tejido de punto doblado al través deben estirarse desde acá

To Here (50%)
jusqu'ici (50%)
hasta acá (50%)

When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.
Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

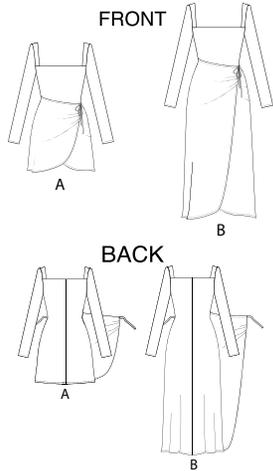


13 PATTERN PIECES

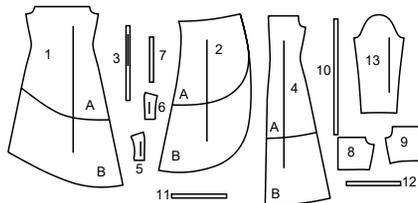

- 1 Front-A,B
- 2 Front Overlay-A,B
- 3 Tie End-A,B
- 4 Back-A,B
- 5 Yoke Front-A,B
- 6 Yoke Back-A,B
- 7 Elastic Guide for Shoulder-A,B
- 8 Front Facing-A,B
- 9 Back Facing-A,B
- 10 Elastic Guide for Casing-A,B
- 11 Elastic Guide for Front-A,B
- 12 Elastic Guide for Back-A,B
- 13 Sleeve-A,B

PATTERN MARKINGS



GRAINLINE: Place on straight grain of fabric, parallel to selvage or fold.

FOLDLINE: Place line on fold of fabric.

BUTTONHOLE MARKING: Indicates exact length and placement of buttonholes.

BUTTON MARKING: Indicates button placement.

NOTCHES AND SYMBOLS: For matching seams and construction details.

Indicates the Bustline, Waistline, Hip and/or Biceps. Measurements refer to circumference of Finished Garment (Body Measurement + Wearing Ease + Design Ease). Adjust pattern if necessary. The measurement excludes pleats, tucks, darts and seam allowances.

SEAM ALLOWANCE: 5/8" (1.5cm) included unless otherwise indicated, but not printed on tissue.


ADJUST IF NECESSARY

Lengthen or Shorten at adjustment lines (==) or where indicated on pattern. If substantial length is added, you may need to purchase additional fabric.

TO SHORTEN: Crease along adjustment line. Make a fold half the amount needed. Tape in place.

TO LENGTHEN: Slash between adjustment lines. Spread amount as needed, keeping edges parallel. Tape over paper.

When Alteration lines are not on tissue, lengthen or shorten at lower edge.



CUTTING AND MARKING

SHRINK FABRIC if not labeled pre-shrunk. Press.


CIRCLE LAYOUT for View, Size, Fabric Width.

Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.

For **DOUBLE THICKNESS (WITH FOLD)** - fold fabric with right sides together.

***DOUBLE THICKNESS (WITHOUT FOLD)** - For fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).

For **SINGLE THICKNESS** - place fabric right side up. (For Fur Pile fabrics, place pile side down.)



★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. For "Cut 1" pieces, cut piece once on single layer of fabric with piece face up on right side of fabric.

Pattern may have cutting lines for several sizes. Select the proper cutting line or pattern pieces for your size.

Before **CUTTING** place all pieces on fabric according to layout. Pin. (Layouts show approximate position of pattern pieces; position may vary according to your pattern size.) Cut **ACCURATELY**, cutting notches outward.

Before removing pattern, **TRANSFER MARKINGS** and lines of construction to Wrong Side of fabric, using the Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be thread traced.


NOTE: Broken-line boxes (at bl cl) in layouts represent pieces cut by measurements provided.

CUTTING LAYOUTS


DRESS A

pieces 1 2 3 4 5 6 8 9 13

60" (150CM)
with nap
sizes 6-8-10-12-14-16

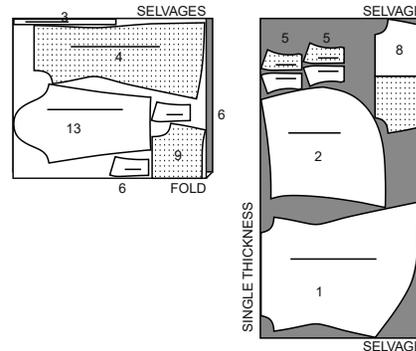


60" (150CM)
with nap
sizes 18-20-22-24

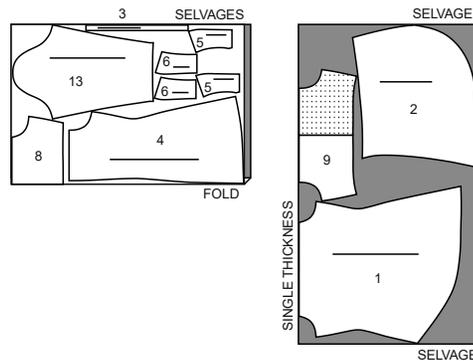


DRESS B

pieces 1 2 3 4 5 6 8 9 13


60" (150CM)
with nap
sizes 6-8-10-12-14-16-18

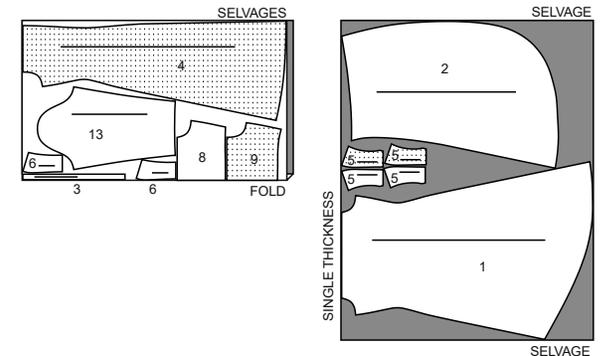

60" (150CM)
with nap
sizes 20-22-24

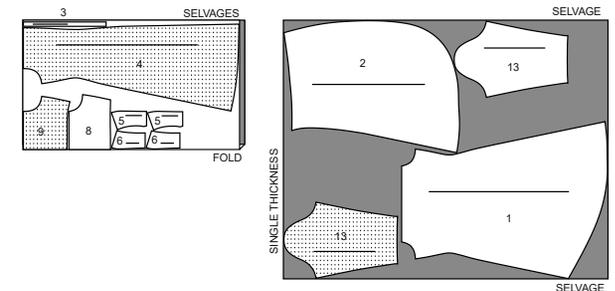


SEWING INFORMATION
FABRIC KEY

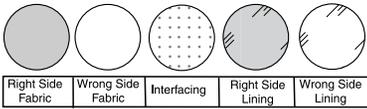

SEAM ALLOWANCES

Use 5/8" (1.5cm) seam allowances unless otherwise indicated.



PIN AND FIT

Pin or baste seams, **RIGHT SIDE TOGETHER**, matching notches. Fit garment before stitching major seams.

PRESS

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.

GLOSSARY

Sewing terms appearing in **BOLD TYPE** in Sewing Instructions are explained below.

TOPSTITCH – See "MACHINE STITCHES: how to topstitch" video.

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials


PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH 5/8" (1.5CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.


SEWING DIRECTIONS

DRESS A, B


1. Pin YOKE FRONT (5) to YOKE BACK (6) at shoulder edges. Stitch. Make yoke facing in the same manner. With right sides together and raw edges even, pin facing to yoke at neck edge. Stitch.

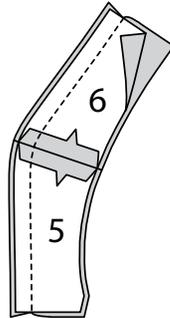


2. Cut a piece of 1/4" (6mm) elastic the length of the ELASTIC GUIDE FOR SHOULDER (7). Transfer markings.



3. Pin elastic to seam allowance of neck edge with inner edge of elastic along seam line, matching small and large dots, placing inner small dot at shoulder seam. Stitch close to inner edge, stretching elastic to fit.

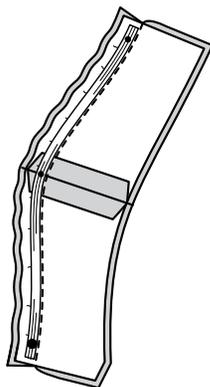

4. Turn yoke; press. Baste raw edges together. With right sides together, pin front edge of yoke to FRONT (1), between large dot and armhole edge. Baste. Press under 5/8" (1.5cm) on lower edge of front. Stitch 1/4" (6mm) from pressed edge for 6" (15cm) from right side edge.

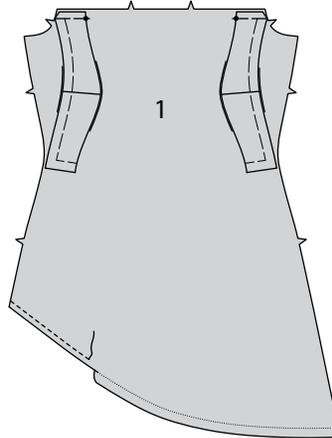


5. To make each tie, on outside, with a needle, attach a strong thread to one end of TIE END (3), as shown. Fold tie end in half, lengthwise, with right sides together.




6. Stitch in a 1/4" (6mm) seam, squaring stitching on threaded end, stretching tie while stitching.




7. Draw needle eye forward, through fold, turning tie right side out.




8. On outside, pin one tie end to left side of front at the small dot with raw edges even. Baste.

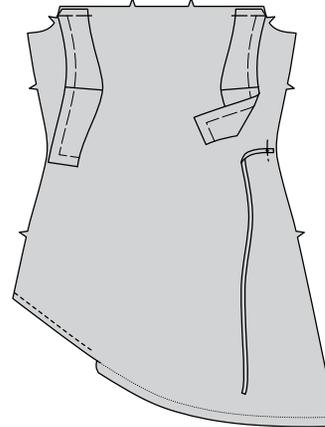


9. Press under 5/8" (1.5cm) on upper edge of FRONT OVERLAY (2). On outside, **TOPSTITCH** pressed edge.

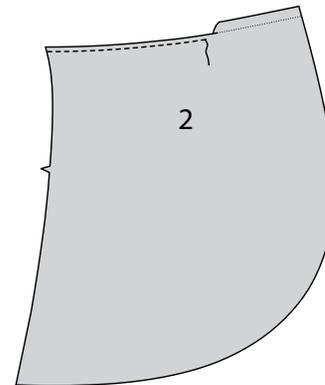


10. On outside, pin remaining tie to upper left edge of front overlay at the small dot with raw edges even. Baste.

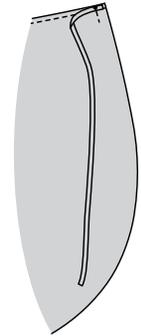


11. Press under left side and lower edge of front overlay 5/8" (1.5cm). To form casing for elastic, on outside, stitch 3/8" (1cm) from pressed edge between the large dots, back-stitching slightly to reinforce the seam.

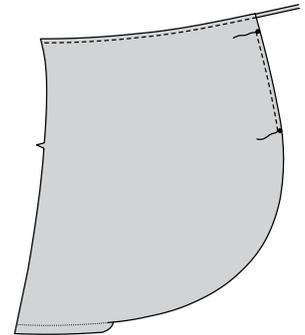


12. Cut a piece of 1/4" (6mm) elastic 3-5/8" (9.2cm) long. Attach a safety pin to one end of elastic. Thread elastic through casing, having each end lap large dots 5/8" (1.5cm). Stitch across ends of elastic at large dots.

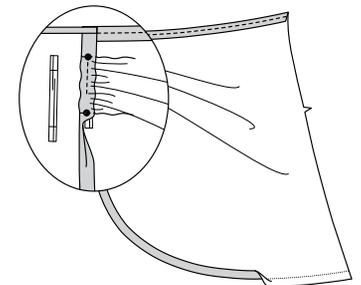


13. Pin wrong side of the overlay to the right side of the front, matching small dots, large dots, and notches on right side edges. Baste.

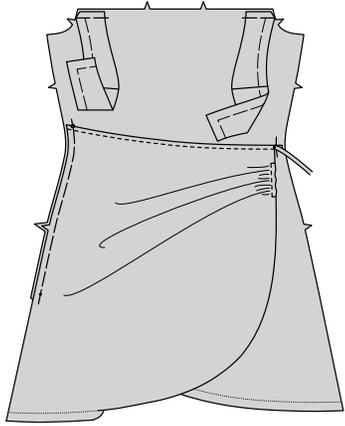


14. Stitch center back edges of BACK (4) sections together. Stitch front to back at side edges.

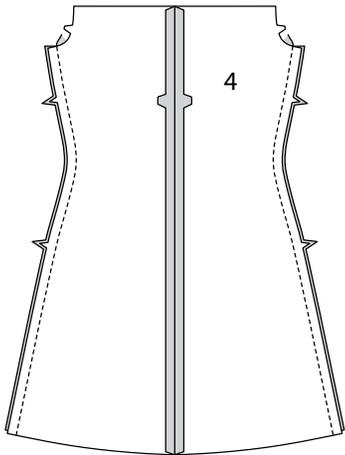

15. Press under lower edge of dress back 5/8" (1.5cm). Stitch remaining pressed edges of front, back, and front overlay 3/8" (1cm) from pressed edge, catching in end of tie on overlay.

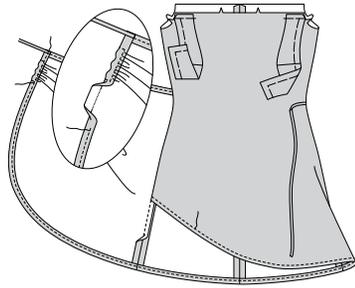


16. On outside, pin back edge of yoke to upper edge of back, between the small dot and armhole edges; baste.

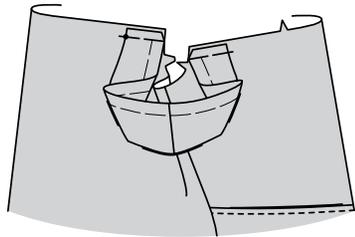


NOTE: FRONT FACING (8) and BACK FACING (9) will be toned as contrast for clarity.


17. Stitch FRONT FACING (8) to BACK FACING (9) at side edges.

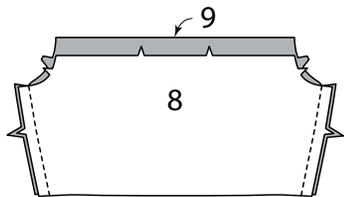


18. With right sides together and raw edges even, pin facing to dress at upper front and upper back edges. Stitch. To make casing for elastic. Stitch again 3/8" (1cm) from first stitching within the seam allowance.

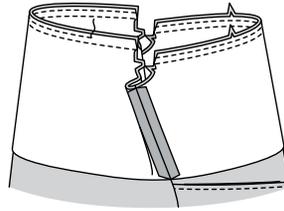

19. For front, cut a piece of 1/4" (6mm) elastic the length of ELASTIC GUIDE FOR FRONT (11), and for back, cut a piece of 1/4" (6mm) elastic the length of ELASTIC GUIDE FOR BACK (12). Transfer markings.

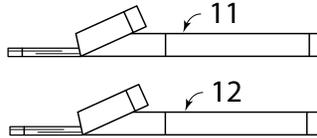


20. Attach a safety pin to one end of each piece of elastic, and thread through corresponding casing, stretching elastic to fit. Stitch across ends of elastic in the seam allowance, being careful not to catch in yoke below seamline.

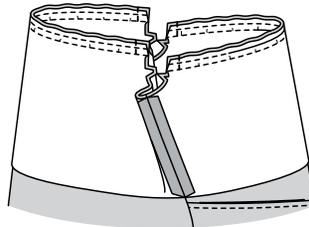


21. Open out facing, press casing toward facing. On outside, TOPSTITCH facing along seam.




22. To make casing on lower edge of facing, press under lower edge 3/4" (2cm). Stitch 5/8" (1.5cm) from pressed edge, leaving an opening to insert elastic.

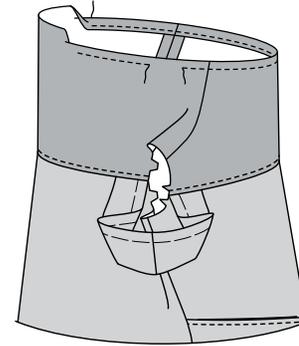


23. Cut a piece of 5/8" (1.5cm) elastic the length of ELASTIC GUIDE FOR CASING (10).




24. Thread elastic through casing, overlap ends, and stitch securely. Stitch opening in casing closed.




25. Turn facing to inside; press, pressing out yokes. Baste facing to dress at armhole edges.

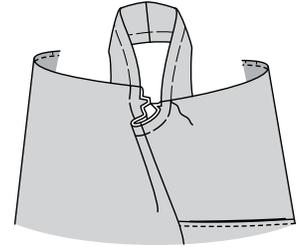

26. To ease top of SLEEVE (13) between notches, stitch along seam line and 1/4" (6mm) inside seam line, using a long machine-stitch. Stitch underarm seam. Press up 5/8" (1.5cm) hem allowance. Stitch 1/4" (6mm) from raw edge.

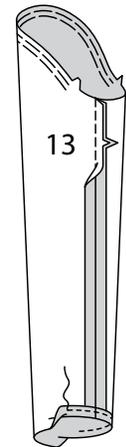

27. Turn sleeve right side out. Hold dress wrong side out with armhole toward you. With right sides together, pin sleeve to armhole edge with center small dot at shoulder seam, matching underarm seams, notches and remaining small dots. Pull up ease stitches to fit. To distribute fullness evenly, slide fabric along bobbin threads until there are no puckers or tucks on the seam line. Baste. Stitch. Stitch again 1/8" (3mm) from first stitching. Trim seam below notches close to stitching. Press only the seam allowance, shrinking out fullness.

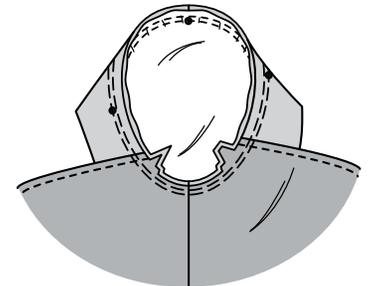



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
[@simplicity_creative_group](#) and [#simplicitypatterns](#)
for a chance to be featured on our social media.

Look for more PDF patterns at simplicity.com

Have a question or need help with your sewing project call us at
1-800-782-0323

McCall's
by **design**_{group}

McCall's ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.mccall.com • Made in the U.S.A. Fabriqué aux États-Unis.
To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.