


McCall's

M8448

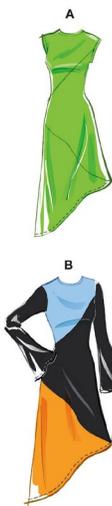

Designed and printed in USA

Easy

MISSES' KNIT DRESS WITH SLEEVE VARIATIONS

Suggested Fabrics: A,B: Stretch Knits only such as Cotton Knits, Interlock, Jerseys. C: Crosswise Striped Knits. See Stretch Gauge.

Sizes	8	10	12	14	16	18	20	22	24	26
European	34	36	38	40	42	44	46	48	50	52

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	31½	32½	34	36	38	40	42	44	46	48	Ins.
Waist	24	25	26½	28	30	32	34	37	39	41	"
Hip-9" below waist	33½	34½	36	38	40	42	44	46	48	50	"
Back-neck to waist	15¾	16	16¼	16½	16¾	17	17¼	17½	17¾	18	"

Dress A 60"* 1½ 1½ 1½ 1½ 1½ 1¾ 1¾ 2 2 2½ Yds.

Dress B 60"* 2 2 2½ 2½ 2½ 2¾ 2¾ 2¾ 2¾ 2¾ 2¾ Yds.

Contrast 1 (Upper Front and Back)

60"* ½ ½ ½ ½ ¾ ¾ ¾ ¾ ¾ ¾ ¾ Yd.

Contrast 2 (Lower Front and Back)

60"* 1 1 1 1 1½ 1½ 1½ 1½ 1¾ 1¾ Yds.

Dress C 60"* 2½ 2½ 2¼ 2¼ 2¾ 2½ 2¾ 2¾ 3 3¾ Yds.

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B,C Bust	33	34	35½	37½	39½	41½	43½	45½	47½	49½	Ins.
A,B,C Waist	28½	29½	31	33	35	37	39	41	43	45	"
A,B,C Hip	39½	40½	42	44	46	48	50	52	54	56	"

*with nap **without nap

Facile

ROBE EN TRICOT AVEC VARIATIONS DE MANCHES POUR JEUNES FEMMES

Tissus Conseillés: A,B: Seulement pour tricot extensibles tels que Tricot de coton, Interlock, Jerseys. C: Tissu à rayures dans le sens de la largeur. Reportez-vous au taux d'élasticité.

Tailles	8	10	12	14	16	18	20	22	24	26
Françaises	36	38	40	42	44	46	48	50	52	54
Européen	34	36	38	40	42	44	46	48	50	52

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	80	83	87	92	97	102	107	112	117	122	cm
Taille	61	64	67	71	76	81	87	94	99	104	"

Hanches (23cm au-dessous de la taille)

	85	88	92	97	102	107	112	117	122	127	cm
Dos du cou à la taille	40	40.5	41.5	42	42.5	43	44	44.5	45	46	"

Robe A 150cm* 1.4 1.4 1.4 1.5 1.5 1.5 1.6 1.8 1.8 1.8 m

Robe B 150cm* 1.8 1.8 1.9 1.9 1.9 2.1 2.1 2.2 2.2 2.3 m

Contraste 1 (Devant et dos supérieur)

150cm* 0.5 0.5 0.5 0.5 0.5 0.6 0.6 0.6 0.6 0.6 m

Contraste 2 (Devant et dos inférieur)

150cm* 0.9 0.9 0.9 0.9 1.0 1.0 1.0 1.0 1.0 1.1 m

Robe C 150cm* 1.9 1.9 2.1 2.1 2.2 2.3 2.5 2.5 2.7 2.7 m

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B,C Poitrine	84	86	90	95	100	105	110	116	121	126	cm
A,B,C Taille	72	75	79	84	89	94	99	104	109	114	"
A,B,C Hanches	100	103	107	112	117	122	127	132	137	142	"

*avec sens **sans sens



A



B



C

Use the 1 inch (2.54cm) box to ensure you are using rule at 100%


Utilisez la boîte de 2,54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.


4" of crosswise folded fabric must **STRETCH** from here
10 cm de tricot plié sur le travers et sur le droit-fil doivent s'étirer de cette limite à celle là
10 cm de tejido de punto doblado (a lo largo y luego al través) deben estirarse desde acá

To Here 50%
jusqu'ici 50%
hasta acá 50%

When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez le taux d'élasticité pour mesurer la capacité d'élasticité des tissus, le taux doit être visible ou imprimé à 100%.
Al utilizar el calibre de elasticidad para medir la capacidad de elasticidad de las telas, el calibre debe estar visible o impreso al 100%.

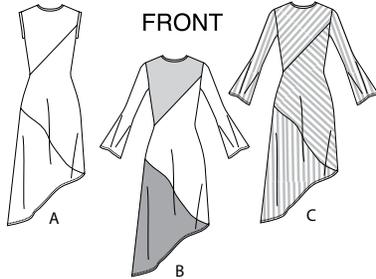


FRONT

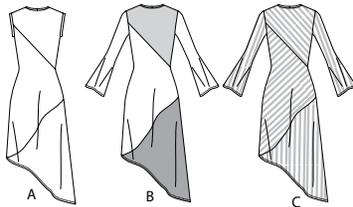


BACK

8 PATTERN PIECES

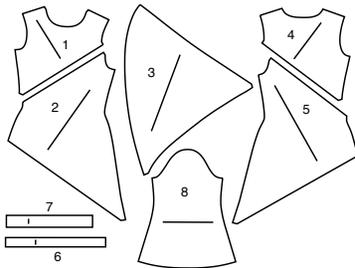

- 1 Upper Front-A,B,C
- 2 Middle Front-A,B,C
- 3 Lower Front and Back-A,B,C
- 4 Upper Back-A,B,C
- 5 Middle Back-A,B,C
- 6 Neckband-A,B,C
- 7 Armhole Band-A
- 8 Sleeve-B,C

PATTERN MARKINGS

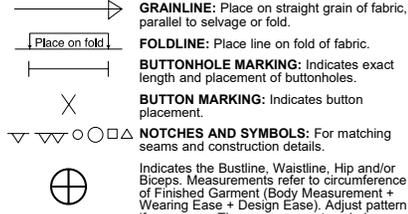

GRAINLINE: Place on straight grain of fabric, parallel to selvage or fold.
FOLDLINE: Place line on fold of fabric.
BUTTONHOLE MARKING: Indicates exact length and placement of buttonholes.
BUTTON MARKING: Indicates button placement.
NOTCHES AND SYMBOLS: For matching seams and construction details.
 Indicates the Bustline, Waistline, Hip and/or Biceps. Measurements refer to circumference of Finished Garment (Body Measurement + Wearing Ease + Design Ease). Adjust pattern if necessary. The measurement excludes pleats, tucks, darts and seam allowances.
SEAM ALLOWANCE: 5/8" (1.5cm) included unless otherwise indicated, but not printed on tissue.

ADJUST IF NECESSARY

Lengthen or Shorten at adjustment lines (==) or where indicated on pattern. If substantial length is added, you may need to purchase additional fabric.
TO SHORTEN: Crease along adjustment line. Make a fold half the amount needed. Tape in place.
TO LENGTHEN: Slash between adjustment lines. Spread amount as needed, keeping edges parallel. Tape over paper.
 When Alteration lines are not on tissue, lengthen or shorten at lower edge.

CUTTING AND MARKING

SHRINK FABRIC if not labeled pre-shrunk. Press.
CIRCLE LAYOUT for View, Size, Fabric Width.
 Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.
 For **DOUBLE THICKNESS (WITH FOLD)** - fold fabric with right sides together.
*** DOUBLE THICKNESS (WITHOUT FOLD)** - For fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).
 For **SINGLE THICKNESS** - place fabric right side up. (For Fur Pile fabrics, place pile side down.)
 ★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. For "Cut 1" pieces, cut piece once on single layer of fabric with piece face up on right side of fabric.
 Pattern may have cutting lines for several sizes. Select the proper cutting line or pattern pieces for your size.
 Before **CUTTING** place all pieces on fabric according to layout. Pin. (Layouts show approximate position of pattern pieces; position may vary according to your pattern size.) Cut **ACCURATELY**, cutting notches outward.
 Before removing pattern, **TRANSFER MARKINGS** and lines of construction to Wrong Side of fabric, using the Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be thread traced.
NOTE: Broken-line boxes (a| b| c|) in layouts represent pieces cut by measurements provided.


CUTTING LAYOUTS

RIGHT SIDE OF PATTERN	WRONG SIDE OF PATTERN	RIGHT SIDE OF FABRIC	WRONG SIDE OF FABRIC
-----------------------	-----------------------	----------------------	----------------------

DRESS A

use pieces: 1 2 3 4 5 6 7


60" (150 cm)
with nap
sizes 8 10 12 14
16 18 20

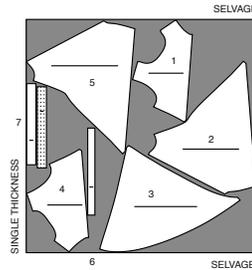


CONTRAST 1 (Upper Front and Neckband)

use pieces: 1 4 6

60" (150 cm)
with nap
all sizes




60" (150 cm)
with nap
sizes 20 22 24 26

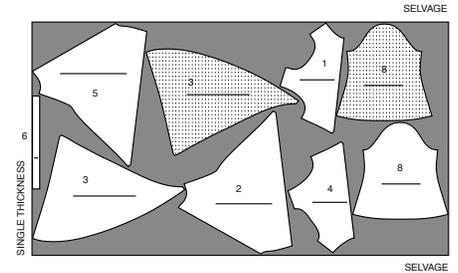

CONTRAST 2 (Upper Front and Back)

use piece: 3


60" (150 cm)
with nap
all sizes



DRESS B

use pieces: 2 3 5 8


60" (150 cm)
with nap
all sizes

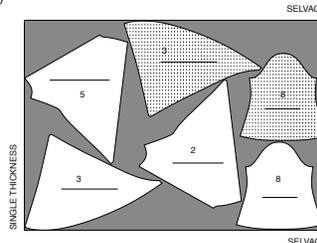

DRESS C


use pieces: 1 2 3 4 5 6 8

60" (150 cm)
with nap
sizes 8 10 12 14 16 18

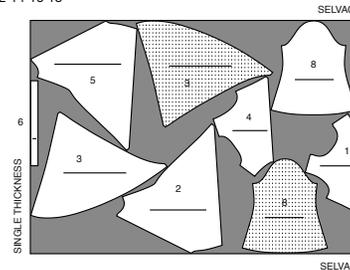


SEWING INFORMATION

FABRIC KEY

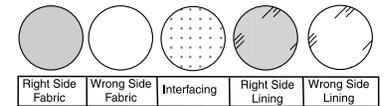

SEAM ALLOWANCES

Use 1/4" (6mm) seam allowances unless otherwise indicated.



PIN AND FIT

Pin or baste seams, RIGHT SIDE TOGETHER, matching notches. Fit garment before stitching major seams.

PRESS

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.

GLOSSARY

Read **General Directions** on page 1 before you begin.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan **QR CODE** to watch videos:

EDGE STITCH - see **Machine Stitches**: "how to edgestitch" video.

EASE/GATHER - see **Gathering**: "sewing two row gathers" video.

NARROW HEM - see **Hems**: "sewing narrow hems" video.

SLEEVE - see **Armholes/Sleeves**: "sewing a set-in sleeve" video.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

SEWING TUTORIALS




Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials


DRESS A, B, C

FRONT AND BACK


1. Pin MIDDLE FRONT (2) to lower edge of UPPER FRONT (1), matching single notches. Stitch.

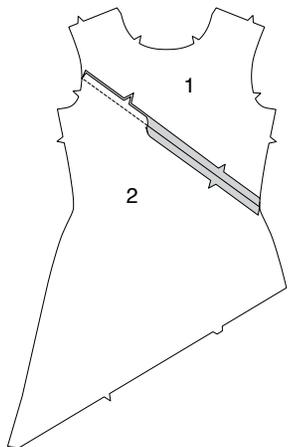


2. Pin LOWER FRONT AND BACK (3) to lower edge of middle front, matching single and double notches. Stitch.

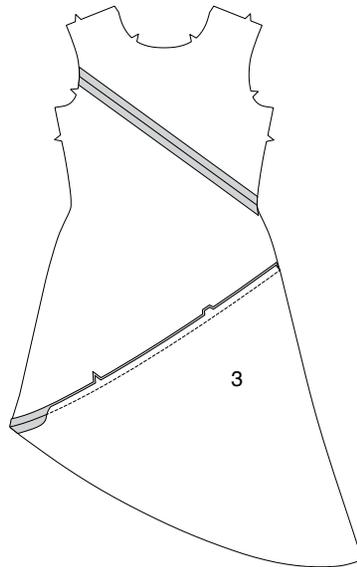


3. Pin MIDDLE BACK (5) to lower edge of UPPER BACK (4), matching double notches. Stitch.

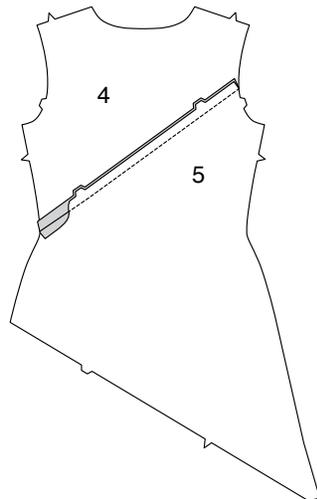

4. Pin remaining LOWER FRONT AND BACK (3) section to lower edge of middle back, matching single and double notches. Stitch.

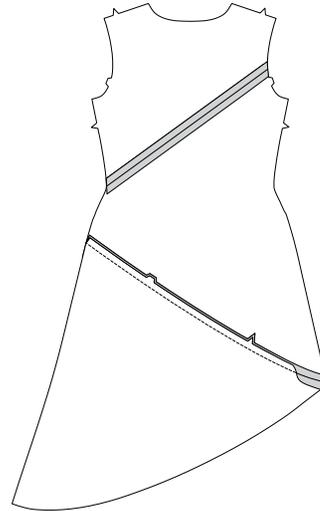


5. Stitch back to front at shoulders. Stitch back to front at sides, matching seams.

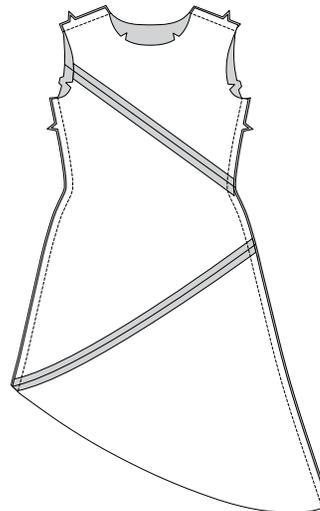


NECKBAND


6. Stitch center back seam of NECKBAND (6). Fold band in half, lengthwise, with **WRONG** sides together; press. Pin.



7. With **RIGHT** sides together and raw edges even, pin band to neck edge, matching centers and placing small dots at shoulder seams. Stitch in a 3/8" (1cm) seam, stretching band to fit.



8. Press seam toward dress, pressing band out. **EDGE STITCH** neck edge of dress close to seam.




CONTINUE AS FOLLOWS FOR VIEW A

ARMBAND


9. Stitch ends of **ARMHOLE BAND** (7). Fold band in half lengthwise, with **WRONG** sides together, matching small dots; press. Pin.



10. On **OUTSIDE**, pin band to armhole edge, placing small dot at shoulder seam and matching side seams. Stitch, stretching the band to fit. Stitch again 1/4" (6mm) away from first stitching within seam allowance. Trim close to second stitching.




11. Press seam toward dress, pressing band out. **EDGE STITCH** dress close to band seam.




FINISHING

12. Make a 5/8" (1.5cm) **NARROW HEM** on lower edge.




CONTINUE AS FOLLOWS FOR VIEWS B, C


13. EASE STITCH upper edge of **SLEEVE** (8) between outer small dots.

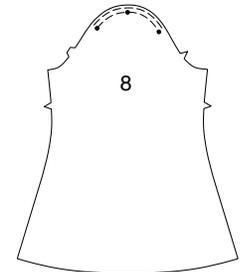

14. Stitch underarm of sleeve. Make a 5/8" (1.5cm) **NARROW HEM** on lower edge.

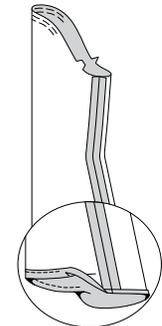


15. With right sides together, pin **SLEEVE** to armhole of dress, matching notches, outer small dots and placing middle small dot at shoulders seam. Adjust ease. Stitch **SLEEVE**. Stitch again 1/4" (6mm) from first stitching. Trim seam.



FINISHING

16. Turn up 5/8" (1.5cm) hem on lower edge; baste close to turned edge. Stitch 3/8" (1cm) from inner raw edge, easing in fullness where necessary.





Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
[@simplicity_creative_group](#) and [#simplicitypatterns](#)
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-800-782-0323

McCall's
by **design**_{group}

McCall's ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.mccall.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.