


McCall's

M8456

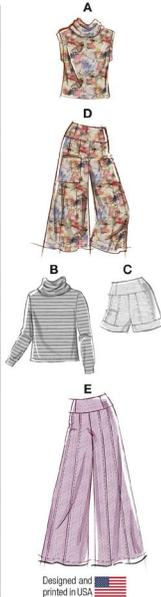

Designed and printed in USA

Easy

MISSES' AND WOMEN'S KNIT TOP, SHORTS AND PANTS

Suggested Fabrics: Stretch Knits only such as Cotton Knit, French Terry, Sweatshirt Fleece. See Stretch Gauge.

Notions: C,D,E: ¾" (1cm) elastic; 1 yd. (1.0m) for Misses'; 1½ yds. (1.5m) for Women's.

MISSES' SIZES	10	12	14	16	18
EUROPEAN	36	38	40	42	44

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	32½	34	36	38	40	Ins.	
Waist	25	26½	28	30	32	"	
Hip	34½	36	38	40	42	"	
Back-neck to waist	16	16¼	16½	16¾	17	"	
Top A	60**	1¾	1¾	1¾	1¾	1¾	Yds.
Top B	60**	1½	1½	1¾	1¾	1¾	Yds.
Shorts C	60**	¾	¾	1	1¾	1¾	Yds.
Pants D	60**	1¾	1¾	1¾	1¾	1¾	Yds.
Pants E	60**	2¾	2¾	2¾	2¾	2¾	Yds.

WOMEN'S SIZES	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
EUROPEAN	46	48	50	52	54	56	58	60	62	64

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	42	44	46	48	50	52	54	56	58	60	Ins.
Waist	35	37	39	41½	44	46½	49	51½	53	54½	"
Hip	44	46	48	50	52	54	56	58	60	62	"
Back-neck to waist	17¼	17¾	17¾	17¾	17¾	17¾	18	18¼	18¼	18¼	"
Top A	60**	1½	1½	1½	1½	2¼	2¾	2¾	2¾	2¾	Yds.
Top B	60**	1¾	2	2	2	2¼	2¾	2¾	2¾	2¾	Yds.
Shorts C	60**	1¼	1¼	1¼	1¼	1½	1½	1¾	1¾	1¾	Yds.
Pants D	60**	2¼	2¼	2¼	2¼	2¼	2½	2½	2½	2½	Yds.
Pants E	60**	2¾	2¾	2¾	2¾	2¾	3	3¼	3¼	3¼	Yds.

NOTE: Please refer to the sewing instructions for **FINISHED GARMENT MEASUREMENTS**.

*with nap **without nap

Facile

HAUT, SHORT ET PANTALON EN TRICOT POUR JEUNES FEMMES ET FEMMES

Tissus Conseillés: Seulement pour tricot extensibles tels que Tricot de coton, Tissu bouclette, Jersey molletonné pour sweat-shirt. Reportez-vous au taux d'élasticité.

Merci: C,D,E: D'élastique de 1cm: de Femmes 1.0m; 1.5m de J.Femmes 1.5m.

TAILLES (J. FEMMES)	10	12	14	16	18
FRANÇAISES	38	40	42	44	46
EUROPÉEN	36	38	40	42	44

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	83	87	92	97	102	cm
Taille	64	67	71	76	81	"
Hanches	88	92	97	102	107	cm
Dos du cou à la taille	40.5	41.5	42	42.5	43	"
Haut A	150cm*	1.3	1.3	1.3	1.3	m
Haut B	150cm*	1.4	1.4	1.5	1.6	m
Short C	150cm*	0.8	0.8	0.9	1.0	m
Pantalon D	150cm*	1.7	1.7	1.7	1.7	m
Pantalon E	150cm*	2.2	2.2	2.2	2.2	m


TAILLES (FEMMES)	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
FRANÇAISES	48	50	52	54	56	58	60	62	64	66
EUROPÉEN	46	48	50	52	54	56	58	60	62	64

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	107	112	117	122	127	132	137	142	147	152	cm
Taille	89	94	99	105	112	118	124	131	134	138	"
Hanches	112	117	122	127	132	137	142	147	152	157	cm
Dos du cou à la taille	44	44	44.5	45	45	45.5	46	46	46.5	47	"
Haut A	150cm*	1.4	1.4	1.4	1.4	2.1	2.1	2.2	2.2	2.2	m
Haut B	150cm*	1.7	1.7	1.8	1.8	2.1	2.1	2.2	2.2	2.2	m
Short C	150cm*	1.1	1.1	1.1	1.1	1.4	1.4	1.4	1.5	1.6	m
Pantalon D	150cm*	1.9	1.9	1.9	1.9	1.9	2.1	2.3	2.3	2.4	m
Pantalon E	150cm*	2.4	2.5	2.5	2.5	2.5	2.7	2.9	2.9	3.0	m

NOTE: S'il vous plaît, reportez-vous aux instructions en français pour les **MESURES DU VÊTEMENTS FINI**.

*avec sens **sans sens



Use the 1 inch (2.54cm) box to ensure you are using rule at 100%


Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.

4" of crosswise folded fabric must STRETCH from here
10 cm de tricot plié sur le travers et sur le droit-fil doivent s'étirer de cette limite à celle là
10 cm de tejido de punto doblado (a lo largo y luego al través) deben estirarse desde acá

To Here 50%
jusqu'ici 50%
hasta acá 50%

When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez le taux d'élasticité pour mesurer la capacité d'élasticité des tissus, le taux doit être visible ou imprimé à 100%.
Al utilizar el calibre de elasticidad para medir la capacidad de elasticidad de las telas, el calibre debe estar visible o impreso al 100%.

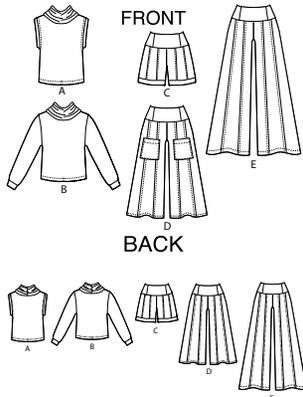

PATTERN MARKINGS

GRAINLINE: Place on straight grain of fabric, parallel to selvage or fold.
FOLDLINE: Place line on fold of fabric.
BUTTONHOLE MARKING: Indicates exact length and placement of buttonholes.
BUTTON MARKING: Indicates button placement.
NOTCHES AND SYMBOLS: For matching seams and construction details.
 Indicates the Bustline, Waistline, Hip and/or Biceps. Measurements refer to circumference of Finished Garment (Body Measurement + Wearing Ease + Design Ease). Adjust pattern if necessary. The measurement excludes pleats, tucks, darts and seam allowances.
SEAM ALLOWANCE: 5/8" (1.5cm) included unless otherwise indicated, but not printed on tissue.

ADJUST IF NECESSARY

Lengthen or Shorten at adjustment lines (==) or where indicated on pattern. If substantial length is added, you may need to purchase additional fabric.
TO SHORTEN: Crease along adjustment line. Make a fold half the amount needed. Tape in place.
TO LENGTHEN: Slash between adjustment lines. Spread amount as needed, keeping edges parallel. Tape over paper.
 When Alteration lines are not on tissue, lengthen or shorten at lower edge.

CUTTING AND MARKING

SHRINK FABRIC if not labeled pre-shrunk. Press.
CIRCLE LAYOUT for View, Size, Fabric Width.
 Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.
 For **DOUBLE THICKNESS (WITH FOLD)** - fold fabric with right sides together.
*** DOUBLE THICKNESS (WITHOUT FOLD)** - For fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).
 For **SINGLE THICKNESS** - place fabric right side up. (For Fur Pile fabrics, place pile side down.)

★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. For "Cut 1" pieces, cut piece once on single layer of fabric with piece face up on right side of fabric.
 Pattern may have cutting lines for several sizes. Select the proper cutting line or pattern pieces for your size.
 Before **CUTTING** place all pieces on fabric according to layout. Pin. (Layouts show approximate position of pattern pieces; position may vary according to your pattern size.) Cut **ACCURATELY**, cutting notches outward.
 Before removing pattern, **TRANSFER MARKINGS** and lines of construction to Wrong Side of fabric, using the Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be thread traced.
NOTE: Broken-line boxes (a! b! c!) in layouts represent pieces cut by measurements provided.

CUTTING LAYOUTS


RIGHT SIDE OF PATTERN	WRONG SIDE OF PATTERN	RIGHT SIDE OF FABRIC	WRONG SIDE OF FABRIC
-----------------------	-----------------------	----------------------	----------------------

MISSES'

TOP A

use pieces: 1 2 3 4


60" (150 cm)
with nap
sizes 10 12 14 16 18



PANTS E

use pieces: 7 8 9 10 11 12 13 14 16

60" (150 cm)
with nap
sizes 10 12 14 16 18


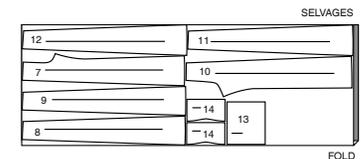


WOMEN'S


TOP A

use pieces: 1 2 3 4

60" (150 cm)
with nap
sizes 20W 22W 24W 26W

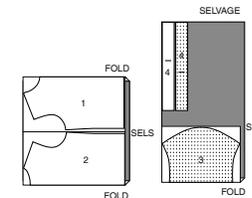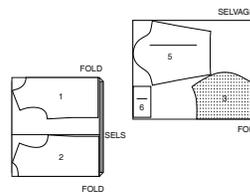


60" (150cm)
with nap
sizes 28W 30W 32W 34W 36W 38W

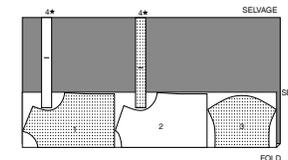


TOP B

use pieces: 1 2 3 5 6

60" (150 cm)
with nap
sizes 20W 22W 24W 26W

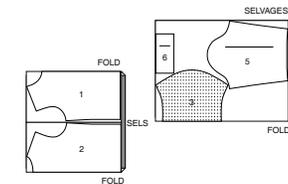

17 PATTERN PIECES

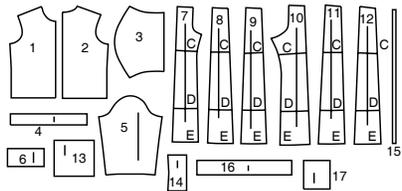

- 1 Front-A,B
- 2 Back-A,B
- 3 Collar-A,B
- 4 Armhole Band-A
- 5 Sleeve-B
- 6 Sleeve Band-B
- 7 Front-C,D,E
- 8 Middle Front-C,D,E
- 9 Side Front-C,D,E
- 10 Back-C,D,E
- 11 Middle Back-C,D,E
- 12 Side Back-C,D,E
- 13 Yoke Front and Back-C,D,E
- 14 Yoke Side-C,D,E
- 15 Guide for Elastic-C,D,E
- 16 Cuff-C
- 17 Pocket-D


MISSES' SIZES	10	12	14	16	18
EUROPEAN	36	38	40	42	44

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)					
A,B Bust	39	40 1/2	42 1/2	44 1/2	46 1/2
A,B Waist	37 1/2	39	41	43	45
D,E Hip	34 1/2	36	38	40	42
Width, lower edge					
Top A,B	37 1/2	39	41	43	45
Width, each leg					Ins.
Pants D	28	29	30 1/2	31 1/2	32 1/2
Pants E	32	32 1/2	33 1/2	34 1/2	35 1/2
Finished back length from base of neck					
Top A,B	22	22 1/2	22 1/2	22 1/2	23
Finished side length from waist					
Shorts C	16 1/2	16 1/2	17	17 1/2	17 1/2
Pants D	32	32 1/2	32 1/2	32 1/2	33
Pants E	42	42 1/2	42 1/2	42 1/2	43

WOMEN'S SIZES	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
EUROPEAN	46	48	50	52	54	56	58	60	62	64

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)										
A,B Bust	49	51	53	55	57	59	61	63	65	67
A,B Waist	47 1/2	49 1/2	51 1/2	53 1/2	55 1/2	57 1/2	59 1/2	61 1/2	63 1/2	65 1/2
D,E Hip	42	44	46	48 1/2	51	53 1/2	56	58 1/2	61	63 1/2
Width, lower edge										
Top A,B	47 1/2	49 1/2	51 1/2	53 1/2	55 1/2	57 1/2	59 1/2	61 1/2	63 1/2	65 1/2
Width, each leg										Ins.
Pants D	33 1/2	35	36 1/2	37 1/2	38 1/2	40	41 1/2	42 1/2	43 1/2	45
Pants E	38 1/2	39 1/2	40 1/2	41 1/2	42 1/2	43 1/2	44 1/2	45 1/2	46 1/2	47 1/2
Finished back length from base of neck										
Top A,B	23 1/2	23 1/2	23 1/2	24	24 1/2	24 1/2	25	25 1/2	25 1/2	Ins.
Finished side length from waist										
Shorts C	17 1/2	17 1/2	17 1/2	18	18 1/2	18 1/2	19	19 1/2	19 1/2	Ins.
Pants D	32 1/2	33	33 1/2	33 1/2	34	34 1/2	34 1/2	34 1/2	35	Ins.
Pants E	42 1/2	43	43 1/2	43 1/2	44	44 1/2	44 1/2	44 1/2	45	Ins.


60" (150cm)
with nap
sizes 28W 30W 32W 34W 36W 38W

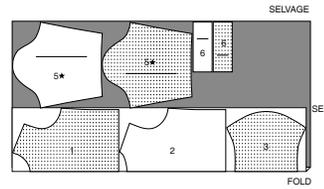


SHORTS C

use pieces: 7 8 9 10 11 12 13 14 16

60" (150 cm)
with nap
sizes 20W 22W 24W 26W




60" (150cm)
with nap
sizes 28W 30W 32W 34W 36W 38W




PANTS D

use pieces: 7 8 9 10 11 12 13 14 17

60" (150 cm)
with nap
sizes 20W 22W 24W 26W 28W 30W

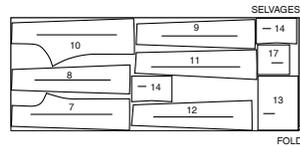


60" (150cm)
with nap
sizes 32W 34W 36W 38W

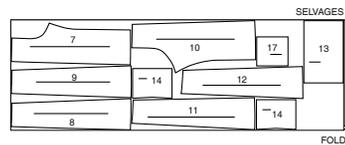


PANTS E

use pieces: 7 8 9 10 11 12 13 14

60" (150 cm)
with nap
sizes 20W 22W 24W 26W 28W 30W

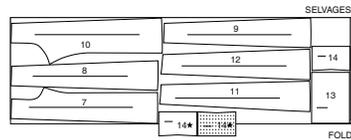


60" (150cm)
with nap
sizes 32W 34W 36W 38W

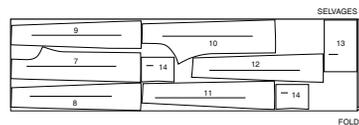


SEWING INFORMATION

FABRIC KEY

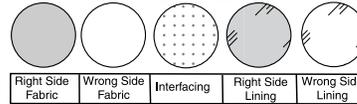

SEAM ALLOWANCES

Use 5/8" (1.5cm) seam allowances unless otherwise indicated.



PIN AND FIT

Pin or baste seams, **RIGHT SIDE TOGETHER**, matching notches. Fit garment before stitching major seams.

PRESS

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.

GLOSSARY

Read **General Directions** on page 1 before you begin.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

EASE/GATHER - see **sewing two row gathers** video.

EDGESTITCH - see **Machine Stitches: "how to do edgestitch** video.

TOPSTITCH - see **how to topstitch** video.

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.


SEWING DIRECTIONS

TOP A, B


NOTE: Under each sub-heading, View A will be illustrated unless otherwise indicated.

FRONT AND BACK


1. With right sides together, stitch **FRONT** (1) to **BACK** (2) at shoulders matching notches.

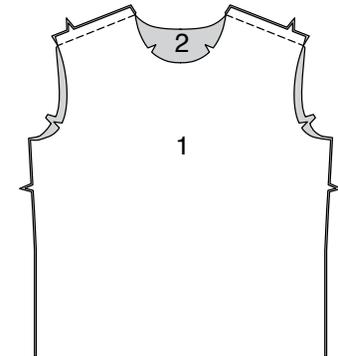


2. Fold **COLLAR** (3) in half with right sides together, matching triple notches. Stitch.

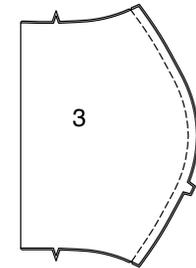



3. With wrong sides together, fold collar along fold line matching seams, having raw edges even. Pin.




4. On outside, pin band to neck edge, matching centers, placing small dots at shoulder seams and having raw edges even. Stitch, stretching the band to fit. Stitch again 1/4" (6mm) away from first stitching within the seam allowance. Trim seam close to second stitching.



5. Press seam toward garment, pressing band out. On outside, straight or zig-zag stitch garment close to neck seam.

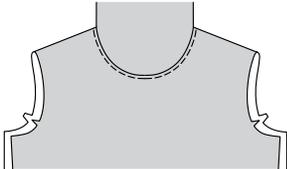


6. With right sides together, stitch front to back at sides.



ARMHOLE BAND A


7. Stitch notched end of ARMHOLE BAND (4). Fold band in half lengthwise, with wrong sides together, matching small dots; press. Pin.



8. On OUTSIDE, pin band to armhole edge, placing small dot at shoulder seam and matching side seams. Stitch, stretching the band to fit. Stitch again 1/4" (6mm) away from first stitching within the seam allowance. Trim seam close to second stitching.




9. Press seam toward garment, pressing band out. If you prefer, on outside, straight or zig-zag stitch garment close to or 1/4" (6mm) from armhole seam.




SLEEVE B


10. EASE upper edge of SLEEVE (5) between notches. With right sides together, stitch under arm seam.

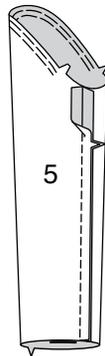


11. With right sides together, stitch ends of SLEEVE BAND (6).




12. Fold band in half with wrong sides together. Pin.




13. On outside, pin band to lower edge of sleeve, matching seams and having raw edges even. Stitch, stretching band to fit. Stitch again 1/4" (6mm) from first stitching within the seam allowance. Trim close to second stitching.



14. Press seam toward sleeve, pressing band out.




15. With right sides together, pin sleeve into armhole, placing center small dot at shoulder seam. Adjust ease; baste. Stitch. Stitch again 1/4" (6mm) away in seam allowance. Trim close to stitching. Press seam allowances flat. Turn seam toward sleeve.



FINISHING

16. Turn up hem. Baste close to fold. Turn in 1/4" (6mm) on raw edge, easing in fullness if necessary. Baste hem in place close to upper edge. Press. TOPSTITCH hem along upper basting, as shown.

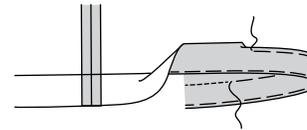


SHORTS C, PANTS D, E


NOTE: Under each sub-heading, View C will be illustrated unless otherwise indicated.

FRONT AND BACK


1. Construct two front sections as follows: With right sides together, stitch FRONT (7) to MIDDLE FRONT (8) matching notches. Press seam toward center front.




2. Stitch SIDE FRONT (9) to middle front matching notches. Press seam toward center front.




3. On outside, TOPSTITCH front in direction of seams.




4. Construct two back sections as follows: With right sides together, stitch BACK (10) to MIDDLE BACK (11) matching notches. Press seam toward center back.



5. Stitch SIDE BACK (12) to middle front matching notches. Press seam toward center back.



6. On outside, TOPSTITCH back in direction of seams.




POCKET D


7. Turn in 1/4" (6mm) on upper edge of each POCKET (17). Press.




8. Turn upper edge to outside along foldline. Stitch ends. Trim.




9. Turn upper edge of pocket to inside, turning in remaining seam allowances and diagonally folding corners. Press. Baste close to inner pressed edge.



10. TOPSTITCH along basting.




11. Pin pocket to front, matching large dots. EDGESTITCH and TOPSTITCH side and lower edges (reinforcing upper ends).




CONTINUE AS FOLLOWS FOR ALL VIEWS


12. Stitch front and back together at inner leg, (stretching back to fit front between upper edge and notch).



13. Stitch crotch seam. Stitch again 1/4" (6mm) away in seam allowance along curve, as shown. Trim close to second stitching.

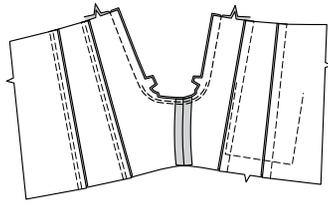


14. Stitch front and back together at sides.

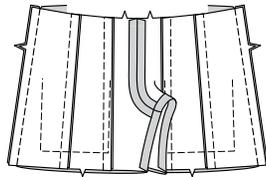


YOKE FRONT AND BACK



15. With right sides together, stitch two YOKE SIDE (14) sections to each side of YOKE FRONT (13).




16. Stitch remaining yoke side sections to back in same manner as front. With right sides together. Stitch yoke front to back at one side seam.




17. Cut a piece of elastic, the length of GUIDE FOR ELASTIC (15). On inside, pin elastic to yoke, placing upper edge along foldline, stretching elastic to match side seams. Stitch ends, stretching elastic while stitching. Trim away elastic close to stitching at side seams.




18. Pin yoke front to back at remaining side seam. Stitch.




19. Fold yoke in half lengthwise with wrong sides together. Pin. **NOTE:** The side with elastic stitching, is the underside of the yoke, and will be on the inside when worn.

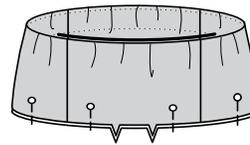

20. With the underside facing you, pin yoke to garment matching centers, side seams and notches. Stitch along seam line. Stitch again 1/4" (6mm) from first stitching within seam allowance. Trim close to second stitching.




21. Press seam toward shorts/pants, pressing yoke out. **TIP:** to secure elastic while wearing, stitch in the ditch or groove of each seam, through all thicknesses.




CUFF C


22. With right sides together, stitch ends of CUFF (16) sections.




23. Fold cuff in half lengthwise, with wrong sides together. Press. Pin.

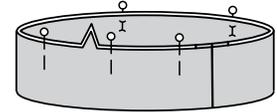

24. On outside, pin cuff to lower edge of shorts, placing small dot at side seam matching outer leg seams, having raw edges even. Stitch, stretching band to fit. Stitch again 1/4" (6mm) from first stitching within the seam allowance. Trim close to second stitching.




25. Press seam toward shorts, pressing cuff out.

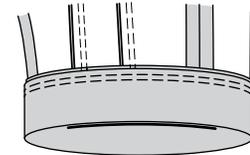

FINISHING D, E

26. Turn up hem. Baste close to fold. Turn in 1/4" (6mm) on raw edge, easing in fullness if necessary. Baste hem in place close to upper edge. Press. **TOPSTITCH** hem along upper basting, as shown.

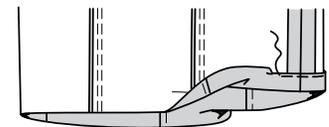



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
[@simplicity_creative_group](#) and [#simplicitypatterns](#)
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-800-782-0323

McCall's
by **design**_{group}

McCall's ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.mccall.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.