

McCall's

M8479



Scan QR code for a Sew-Along video tutorial.  
Scannez le code QR pour un didacticiel vidéo de couture.



Designed and  
printed in USA

| Average                                                                                                                                                                              |             |     |     |     |     |     |    |     |     |         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----|-----|-----|-----|-----|----|-----|-----|---------|
| MISSES' WRAP SKIRTS                                                                                                                                                                  |             |     |     |     |     |     |    |     |     |         |
| Suggested Fabrics: Cotton Blends, Denim, Poplin, Twill. Interfacing: Lightweight Fusible.                                                                                            |             |     |     |     |     |     |    |     |     |         |
| Notions: A,B,C: One 5" (13cm) zipper (cut to fit), one ¾" button. Also for A,B: Pair of 1½" (4cm) D-Rings. Also for C: One 1½" (4cm) buckle slider, two ¾" (1.5cm) heavy duty snaps. |             |     |     |     |     |     |    |     |     |         |
| Sizes                                                                                                                                                                                | 6           | 8   | 10  | 12  | 14  | 16  | 18 | 20  | 22  | 24      |
| European                                                                                                                                                                             | 32          | 34  | 36  | 38  | 40  | 42  | 44 | 46  | 48  | 50      |
| BODY MEASUREMENTS: Select pattern size based on body measurements                                                                                                                    |             |     |     |     |     |     |    |     |     |         |
| Bust                                                                                                                                                                                 | 30½         | 31½ | 32½ | 34  | 36  | 38  | 40 | 42  | 44  | 46 Ins. |
| Waist                                                                                                                                                                                | 23          | 24  | 25  | 26½ | 28  | 30  | 32 | 34  | 37  | 39 "    |
| Hip-9" below waist                                                                                                                                                                   | 32½         | 33½ | 34½ | 36  | 38  | 40  | 42 | 44  | 46  | 48 "    |
| Back-neck to waist                                                                                                                                                                   | 15½         | 15¾ | 16  | 16¼ | 16½ | 16¾ | 17 | 17¼ | 17½ | 17¾ "   |
| Skirt A (sits ½" below waist)                                                                                                                                                        |             |     |     |     |     |     |    |     |     |         |
| 45"                                                                                                                                                                                  | 1¾          | 1¾  | 1¾  | 1¾  | 1¾  | 1¾  | 2  | 2¼  | 2¼  | 2¼ Yds. |
| 60"                                                                                                                                                                                  | 1¾          | 1¾  | 1½  | 1½  | 1½  | 1½  | 1¾ | 1¾  | 1¾  | 1¾ "    |
| Interfacing                                                                                                                                                                          | 20" - ¾ yd. |     |     |     |     |     |    |     |     |         |
| Skirt B (sits ½" below waist)                                                                                                                                                        |             |     |     |     |     |     |    |     |     |         |
| 45"                                                                                                                                                                                  | 2¼          | 2¼  | 2¼  | 2¼  | 2¼  | 2¼  | 2¼ | 2¾  | 2¾  | 2¾ Yds. |
| 60"                                                                                                                                                                                  | 1½          | 1½  | 1½  | 1½  | 1½  | 1¾  | 1¾ | 1¾  | 1¾  | 1¾ "    |
| Interfacing                                                                                                                                                                          | 20" - ¾ yd. |     |     |     |     |     |    |     |     |         |
| Skirt C (sits ½" below waist)                                                                                                                                                        |             |     |     |     |     |     |    |     |     |         |
| 45"                                                                                                                                                                                  | 2           | 2   | 2   | 2¼  | 2¼  | 2¼  | 2¼ | 2¼  | 2¼  | 2¼ Yds. |
| 60"                                                                                                                                                                                  | 1¾          | 1¾  | 1¾  | 1¾  | 1¾  | 1¾  | 1¾ | 1¾  | 1¾  | 1¾ "    |
| Interfacing                                                                                                                                                                          | 20" - ¾ yd. |     |     |     |     |     |    |     |     |         |
| FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)                                                                                                                     |             |     |     |     |     |     |    |     |     |         |
| A,B,C Hip                                                                                                                                                                            | 39½         | 40½ | 41½ | 43  | 45  | 47  | 49 | 51  | 53  | 55 Ins. |
| Width, lower edge                                                                                                                                                                    |             |     |     |     |     |     |    |     |     |         |
| Skirt A,B,C                                                                                                                                                                          | 44½         | 45½ | 46½ | 48  | 50  | 52  | 54 | 56  | 58  | 60 Ins. |
| Finished back length from waist                                                                                                                                                      |             |     |     |     |     |     |    |     |     |         |
| Skirt A,B,C (sits ½" below waist)                                                                                                                                                    | 17          | 17  | 17  | 17  | 17  | 17  | 17 | 17  | 17  | 17 Ins. |

\*with nap \*\*without nap

**JUPES PORTEFEUILLE POUR JEUNES FEMMES****Tissus Conseillés:** Cotonnades, Denim, Popeline, Twill. **Entoilage:** Thermocollant léger.**Merçerie:** A,B,C: 1 fermeture à glissière de 13cm (coupée pour ajuster), 1 bouton de 2cm. **Aussi pour A,B:** Paire de Anneaux D de 4cm. **Aussi pour C:** 1 boucle coulissante de 4cm, 2 boutons-pressions résistant de 1.5cm.

|                                                                                 |             |     |      |      |     |      |     |     |      |     |    |
|---------------------------------------------------------------------------------|-------------|-----|------|------|-----|------|-----|-----|------|-----|----|
| Tailles                                                                         | 6           | 8   | 10   | 12   | 14  | 16   | 18  | 20  | 22   | 24  |    |
| Françaises                                                                      | 34          | 36  | 38   | 40   | 42  | 44   | 46  | 48  | 50   | 52  |    |
| Européen                                                                        | 32          | 34  | 36   | 38   | 40  | 42   | 44  | 46  | 48   | 50  |    |
| MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps |             |     |      |      |     |      |     |     |      |     |    |
| Poitrine                                                                        | 78          | 80  | 83   | 87   | 92  | 97   | 102 | 107 | 112  | 117 | cm |
| Taille                                                                          | 58          | 61  | 64   | 67   | 71  | 76   | 81  | 87  | 94   | 99  | "  |
| Hanches (23cm au-dessous de la taille)                                          | 83          | 85  | 88   | 92   | 97  | 102  | 107 | 112 | 117  | 122 | cm |
| Dos du cou à la taille                                                          | 39.5        | 40  | 40.5 | 41.5 | 42  | 42.5 | 43  | 44  | 44.5 | 45  | "  |
| Jupe A (repose 1.3cm dessous de la taille)                                      |             |     |      |      |     |      |     |     |      |     |    |
| 115cm*                                                                          | 1.6         | 1.6 | 1.6  | 1.6  | 1.6 | 1.6  | 1.8 | 1.9 | 1.9  | 1.9 | m  |
| 150cm*                                                                          | 1.3         | 1.3 | 1.3  | 1.3  | 1.4 | 1.4  | 1.5 | 1.5 | 1.5  | 1.6 | "  |
| Entoilage                                                                       | 51cm - 0.8m |     |      |      |     |      |     |     |      |     |    |
| Jupe B (repose 1.3cm dessous de la taille)                                      |             |     |      |      |     |      |     |     |      |     |    |
| 115cm*                                                                          | 1.9         | 1.9 | 1.9  | 1.9  | 2.1 | 2.1  | 2.1 | 2.2 | 2.2  | 2.2 | m  |
| 150cm*                                                                          | 1.4         | 1.4 | 1.4  | 1.4  | 1.5 | 1.6  | 1.6 | 1.6 | 1.6  | 1.6 | "  |
| Entoilage                                                                       | 51cm - 0.8m |     |      |      |     |      |     |     |      |     |    |
| Jupe C (repose 1.3cm dessous de la taille)                                      |             |     |      |      |     |      |     |     |      |     |    |
| 115cm*                                                                          | 1.8         | 1.8 | 1.8  | 1.8  | 1.9 | 1.9  | 1.9 | 1.9 | 2.1  | 2.1 | m  |
| 150cm*                                                                          | 1.4         | 1.4 | 1.5  | 1.5  | 1.5 | 1.5  | 1.5 | 1.7 | 1.7  | 1.7 | "  |
| Entoilage                                                                       | 51cm - 0.7m |     |      |      |     |      |     |     |      |     |    |
| MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)                   |             |     |      |      |     |      |     |     |      |     |    |
| A,B,C Hanches                                                                   | 100         | 103 | 105  | 109  | 114 | 119  | 124 | 130 | 135  | 140 | cm |
| Largeur à l'ourlet                                                              |             |     |      |      |     |      |     |     |      |     |    |
| Jupe A,B,C                                                                      | 113         | 116 | 118  | 122  | 127 | 132  | 137 | 142 | 147  | 152 | cm |
| Longueur finie – dos, taille à l'ourlet                                         |             |     |      |      |     |      |     |     |      |     |    |
| Jupe A,B,C (repose 1.3cm dessous de la taille)                                  | 43          | 43  | 43   | 43   | 43  | 43   | 43  | 43  | 43   | 43  | cm |

\*avec sens \*\*sans sens



A



B



C

M8479

Page 1 of 4


# McCall's®

English


1-800-782-0323



SCAN QR CODE  
FOR A  
STEP-BY-STEP  
VIDEO TUTORIAL

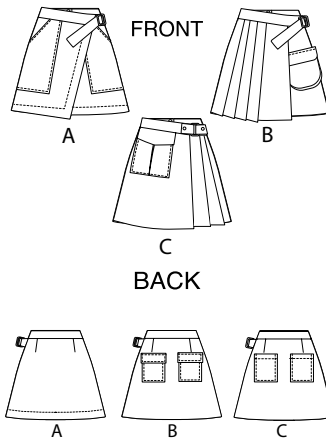


## 23 PATTERN PIECES

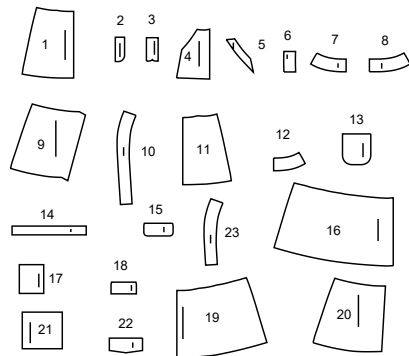

1 FRONT - A, B, C  
2 RIGHT FLY FACING - A, B, C  
3 LEFT FLY - A, B, C  
4 FRONT POCKET - A  
5 FRONT POCKET FACING - A  
6 LEFT TAB - A, B, C  
7 RIGHT FRONT WAISTBAND - A, B, C  
8 LEFT FRONT WAISTBAND - A, B, C  
9 WRAP - A  
10 FRONT BELT - A, B  
11 BACK - A, B, C  
12 BACK WAISTBAND - A, B, C

13 POCKET - B  
14 GUSSET - B  
15 FLAP - B  
16 WRAP - B  
17 BACK POCKET - B, C  
18 FLAP - B  
19 LEFT FRONT - C  
20 FRONT WRAP - C  
21 POCKET - C  
22 UPPER FLAP - C  
23 FRONT BELT - C

## PATTERN MARKINGS



**GRAINLINE:** Place on straight grain of fabric, parallel to selvage or fold.

**FOLDLINE:** Place line on fold of fabric.

**BUTTONHOLE MARKING:** Indicates exact length and placement of buttonholes.

**BUTTON MARKING:** Indicates button placement.

**NOTCHES AND SYMBOLS:** For matching seams and construction details.

Indicates the Bustline, Waistline, Hip and/or Biceps. Measurements refer to circumference of Finished Garment (Body Measurement + Wearing Ease + Design Ease). Adjust pattern if necessary. The measurement excludes pleats, tucks, darts and seam allowances.

**SEAM ALLOWANCE:** 5/8" (1.5cm) included unless otherwise indicated, but not printed on tissue.

## ADJUST IF NECESSARY

Lengthen or Shorten at adjustment lines (==) or where indicated on pattern. If substantial length is added, you may need to purchase additional fabric.

**TO SHORTEN:** Crease along adjustment line. Make a fold half the amount needed. Tape in place.

**TO LENGTHEN:** Slash between adjustment lines. Spread amount as needed, keeping edges parallel. Tape over paper.

When Alteration lines are not on tissue, lengthen or shorten at lower edge.

## SHRINK FABRIC

if not labeled pre-shrunk. Press.

## CIRCLE LAYOUT

For View, Size, Fabric Width. Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.

For **DOUBLE THICKNESS (WITH FOLD)** - fold fabric with right sides together.

**\* DOUBLE THICKNESS (WITHOUT FOLD)** - For fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).

For **SINGLE THICKNESS** - place fabric right side up. (For Fur Pile fabrics, place pile side down.)

## CUTTING AND MARKING

★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. For "Cut 1" pieces, cut piece once on single layer of fabric with piece face up on right side of fabric.

Pattern may have cutting lines for several sizes. Select the proper cutting line or pattern pieces for your size.

Before **CUTTING** place all pieces on fabric according to layout. Pin. (Layouts show approximate position of pattern pieces; position may vary according to your pattern size.) Cut **ACCURATELY**, cutting notches outward.

Before removing pattern, **TRANSFER MARKINGS** and lines of construction to Wrong Side of fabric, using the Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be thread traced.

**NOTE:** Broken-line boxes (a! b! c!) in layouts represent pieces cut by measurements provided.


## CUTTING LAYOUTS

| RIGHT SIDE OF PATTERN | WRONG SIDE OF PATTERN | RIGHT SIDE OF FABRIC | WRONG SIDE OF FABRIC |
|-----------------------|-----------------------|----------------------|----------------------|
|                       |                       |                      |                      |


## SKIRT A

use pieces: 1 2 3 4 5 6 7 8 9 10 11 12


45" (115 cm)  
with nap  
sizes 6 8 10 12 14 16

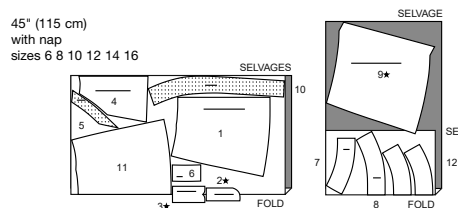

45" (115 cm)  
with nap  
sizes 18 20 22 24

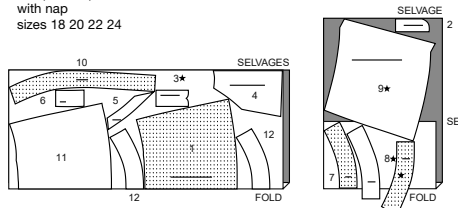


60" (150 cm)  
with nap  
all sizes

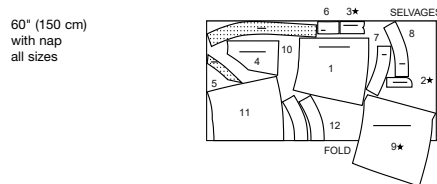


## SKIRT B

use pieces: 1 2 3 6 7 8 10 11 12 13 14 15 16 17 18


45" (115 cm)  
with nap  
all sizes

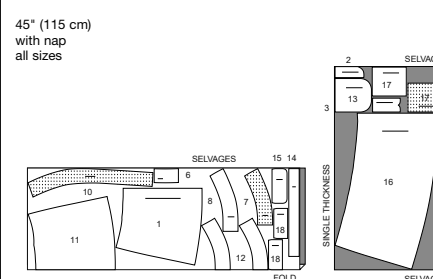

60" (150 cm)  
with nap  
sizes 6 8 10 12

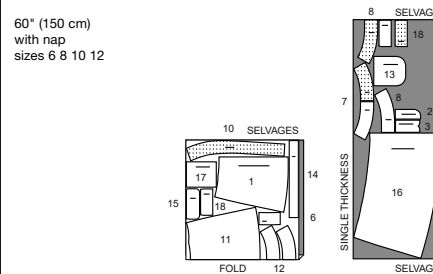


60" (150 cm)  
with nap  
sizes 14 16 18 20 22 24

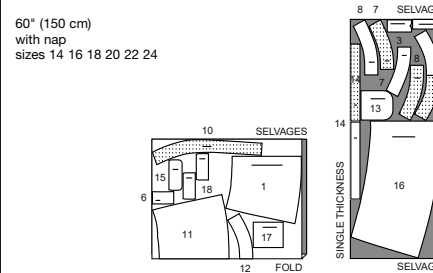

## INTERFACING B

use pieces: 2 3 6 7 8 10 12 15 18


20" (51 cm)  
all sizes

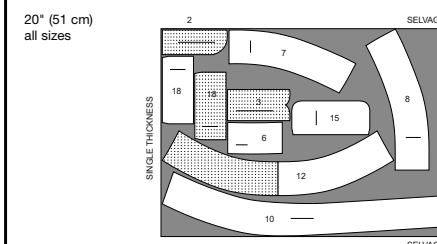


## SKIRT C

use pieces: 1 2 3 6 7 8 11 12 17 19 20 21 22 23

45" (115 cm)  
with nap  
all sizes

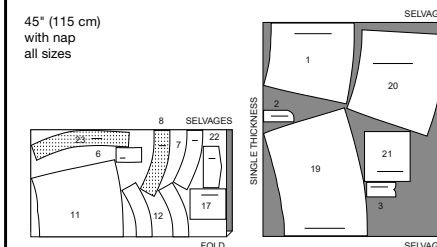



60" (150 cm)  
with nap  
all sizes

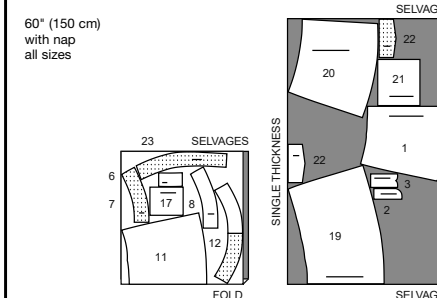


© 2024 McCall's® an IG Design Group Americas, Inc. brand.  
All Rights Reserved. Printed in U.S.A.

**INTERFACING C**




use pieces: 2 3 6 7 8 12 22 23

20" (51 cm)  
all sizes**SEWING INFORMATION****FABRIC KEY****SEAM ALLOWANCES**
















Use 5/8" (1.5cm) seam allowances unless otherwise indicated.

**PIN AND FIT**Pin or baste seams, **RIGHT SIDE TOGETHER**, matching notches. Fit garment before stitching major seams.**PRESS**

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.

**GLOSSARY**Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:**EDGE STITCH** - Stitch close to finished edge or seam.**FINISH** - Stitch 1/4" (6mm) from raw edge and finish with one of the following: (1) Pink OR (2) Overcast OR (3) Turn in along stitching and stitch close to fold OR (4) Overlock.**BLIND STITCH** - Turn edge down about 1/4" (6mm); make a small diagonal stitch by picking up one thread of garment, then one thread of hem or facing.**SLIP STITCH** - Slide needle through a folded edge, then pick up a thread of underneath fabric.**STAY STITCH** - Stitch 1/8" (3mm) from seamline in seam allowance (usually 1/2" (1.3cm) from raw edge).**TOP STITCH** - On outside, stitch 1/4" (6mm) from edge, seam or previous stitching, using presser foot as guide, or stitch where indicated in instructions.**UNDERSTITCH** - Open out facing or underside of garment; stitch to seam allowance close to seam.SCAN QR CODE  
FOR A  
STEP-BY-STEP  
VIDEO TUTORIAL**SEWING DIRECTIONS****NOTE:** Under each sub-heading, the first view will be illustrated, unless otherwise illustrated.**SKIRT A, B, C****INTERFACING****1.** Trim corners of INTERFACING, as shown. Fuse interfacing to wrong side of each matching FABRIC section, following manufacturer's instructions.**FRONT****2.** Stitch dart in FRONT (1). Press fold of dart toward center front.**3. For View C:** To make pleats in LEFT FRONT (19), on outside, crease along solid lines. Bring creases to broken lines in direction of arrows; baste. Baste across upper edge; press.

- 4. A-** Stitch front/left front sections together at center front seam, between large dot and lower notches.  
**B-** Turn in left front opening edge along foldline; press.  
**C-** Place closed zipper (face up) under left front opening edge, having pressed edge close to zipper teeth and zipper stop at small dot. Using a zipper foot, baste close to pressed edge.  
**D-** With right sides together, fold LEFT FLY (3) in half, lengthwise, matching dots. Stitch lower edge; trim seam. Turn; press. Baste raw edges.  
**E-** On inside, pin left fly to left front opening edge (over zipper), matching notches and small dots, having raw edges even. Baste along previous basting for zipper.  
**F-** On outside, using a zipper foot, stitch close to pressed edge of front through all layers.  
**G-FINISH** outer edge of RIGHT FLY FACING (2). Pin fly facing to right front opening edge, matching notches and large dots. Stitch, ending at large dot. Trim seam.  
**UNDERSTITCH** fly facing. Turn facing to inside; press.  
**H-** Lap right front over left, matching centers. Baste close to edge through all thicknesses.  
**I-** Pin left fly out of the way. Open out fly facing. Pin remaining zipper tape to fly facing, keeping right front free. Using a zipper foot, stitch in place close to zipper teeth and along center of zipper tape.  
**J-** Turn facing down. On outside, stitch right front along stitching line, keeping left fly free.  
**K-** Turn fly back in place. On inside, hand tack fly and facing together at lower edge, as shown. Trim away excess zipper tape even with lower edge of fly, if needed.  
**L-** If desired, on outside, machine-stitch a bar tack across lower end of fly through all thicknesses.

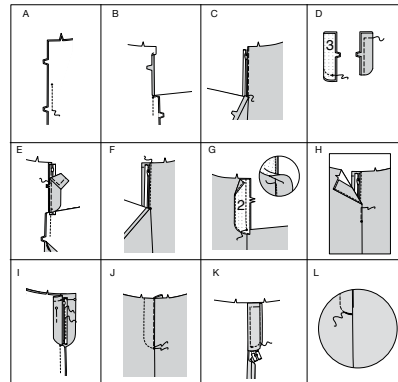**5.** Stitch remaining center front seam, from lower edge to notch.**POCKETS****VIEW A**  
**6. FINISH** long unnotched edge of FRONT POCKET FACING (5).**7.** With right sides together, pin facing to slanted edge of FRONT POCKET (4), matching dots. Stitch slanted edge; trim seam.**8. UNDERSTITCH** facing.**9.** Turn facing to inside; press. Baste raw edges. **TOPSTITCH** slanted edge.**10.** Turn under 5/8" (1.5cm) on front and lower edges, folding in corner diagonally; press.**11.** Pin one pocket to side edge of left skirt front, matching small dots, having raw edges even; baste. (Save remaining pocket.) **EDGE STITCH** and **TOPSTITCH** 1/4" (6mm) away along front and lower edges.**VIEW B**  
**12. STAYSTITCH** notched edge of GUSSET (14).**13.** Press under 5/8" (1.5cm) on long unnotched edge of gusset. Trim pressed edge to 3/8" (1cm).**14.** Stitch pressed edge of gusset 1/4" (6mm) from fold, using long machine stitches, as shown.**15.** With right sides together, pin gusset to sides and lower edge of POCKET (13), matching notches, dots and foldlines, clipping gusset where necessary. Stitch; trim seam. Press seam toward pocket.**16.** Fold upper edge of pocket and gusset on foldline, wrong sides together. Turn under 1/4" (6mm) on raw edge. Baste close to inner pressed edge.**17.** Stitch upper edge of pocket and gusset along basting.**18.** Pin gusset to left skirt front, matching large dots, having pressed edge along solid line. Pull threads to ease in fullness on curves. Stitch close to pressed edge of gusset, keeping pocket section free.**19.** Pin pocket over gusset, having sides and lower edges even, folding in gusset. **EDGE STITCH** side edges of pocket to skirt, from upper edge to upper pocket stitching, through all layers. Back-stitch to reinforce.**20.** Pin FLAP (15) sections, right sides together, matching dots. Stitch sides and lower edge; trim seam.**21.** Turn right side out; press. Baste raw edges.**22.** Pin flap (interfaced side up) to left front, placing seamline along solid line, matching small dots. Stitch along seamline between dots. Trim flap seam allowance to a scant 1/4" (6mm), being careful not to cut skirt. Turn flap down; press. **TOPSTITCH** upper edge of flap, encasing trimmed edge.

## LEFT TAB

## VIEWS A, B

**23.** With right sides together, pin LEFT TAB (6) sections together. Stitch long edges; trim seams.




**24.** Turn right side out; press. Baste raw edges.



**25.** Slip ends through two D-rings, having raw edges even; baste.



**26.** On outside, pin tab to left front, matching small and large dots, having raw edges even; baste.



## VIEW C


**27.** With right sides together, pin LEFT TAB (6) sections together. Stitch, leaving short end with small and large dots free; trim seams.



**28.** Turn right side out; press. Baste raw edges.




**29.** On outside, pin tab to left front, matching small and large dots, having raw edges even; baste.




## BACK

**30.** Stitch darts in BACK (11). Press fold of darts toward center.

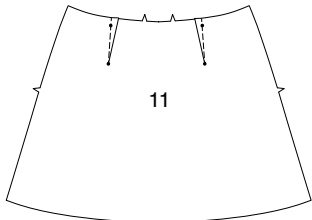

## POCKETS B, C


**31.** Press under 1/4" (6mm) on upper edge of POCKET (17). Turn upper edge to OUTSIDE along foldline, forming facing. Stitch along seam line on raw edges. Trim seam allowance in the facing area to 1/4" (6mm).



**32.** Turn corners RIGHT side out, turning facing to the WRONG side. Press, pressing under raw edges along stitching, folding in corners. Stitch facing close to inner edge.




**33.** On OUTSIDE, pin pocket to back, matching large dots. **EDGESTITCH** and **TOPSTITCH** sides and lower edge.

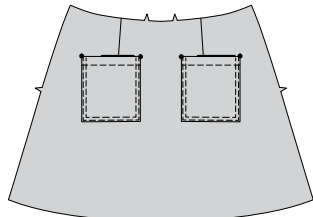

## FLAP B


**34.** For each flap, stitch uninterfaced FLAP (18) to interfaced flap sections, leaving upper edge free. Trim seams.



**35.** Turn right side out; press. Baste raw edges. **TOPSTITCH** finished edges of flap.




**36.** Pin flap (interfaced side up) to skirt back, placing seamline along placement line, matching small dots. Stitch along seamline between small dots. Trim flap seam allowance to a scant 1/4" (6mm), being careful not to cut skirt. Turn flap down; press. **TOPSTITCH** upper edge of flap, encasing trimmed edge.

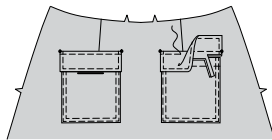


## VIEWS A, B, C

**37.** Stitch skirt back to skirt front at left side seam.




## WAISTBAND


**38.** **STAYSTITCH** upper edge of skirt front and back.

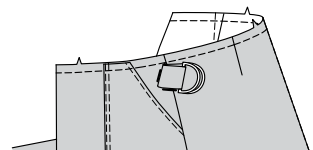


**39.** Pin interfaced RIGHT FRONT WAISTBAND (7) section to upper edge of skirt right front, right sides together, matching notches and centers, clipping skirt where necessary. Stitch; trim seam. Press seam toward waistband. (Uninterfaced right front waistband will be use as facing.)



**40.** Pin interfaced LEFT FRONT WAISTBAND (8) to interfaced BACK WAISTBAND (12) at left side seam, right sides together, matching notches. (Uninterfaced waistbands will be use as facings.)

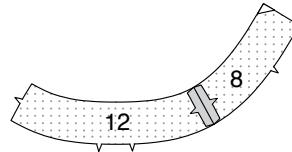

**41.** Pin interfaced waistband to upper edge of skirt left front and back, right sides together, matching notches and centers and left side seam, clipping skirt where necessary. Stitch; trim seam. Press seam toward waistband.

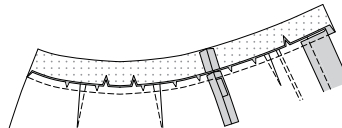


## FRONT WRAP

## VIEW A

**42.** Pin remaining front pocket (4) to right side edge of WRAP (9), matching small dots, having raw edges even; baste.


**EDGESTITCH** and **TOPSTITCH** 1/4" (6mm) away along front and lower edges.




**43.** Press under 5/8" (1.5cm) on long edge of front self-facing on wrap. Trim pressed edge to 3/8" (1cm). Turn lower edge of self-facing to outside on foldline. Stitch across self-facing 1-3/4" (4.5cm) above raw edge. Trim, as shown.




**44.** Turn self-facing to inside, continuing to turn under 1-3/4" (4.5cm) on remainder of lower edge of wrap. Baste close to fold. Turn under 1/4" (6mm) on raw edge. Baste hem in place close to upper edge. Baste front edge close to pressed edge. Press.



**45.** **TOPSTITCH** hem along upper basting, pivoting at front corner, continuing stitching along basting on front edge. Baste front edge along upper edge.




**46.** Catchstitch self-facing to hem. Baste hem at side edge.




## VIEW B


**47.** To make pleats in WRAP (16), on outside, crease along solid lines. Bring creases to broken lines in direction of arrows; baste. Baste across upper edge; press.

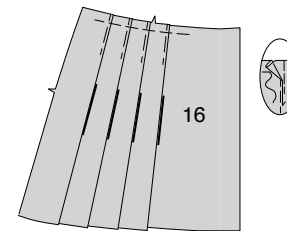


**48.** **FINISH** long edge of front self-facing on wrap.




**49.** Turn lower edge of self-facing to outside on foldline. Stitch across self-facing 1-3/4" (4.5cm) above raw edge. Trim, as shown.



**50.** Turn self-facing to inside on foldline, continuing to turn under 1-3/4" (4.5cm) on remainder of lower edge of wrap, opening out pleats. Baste close to fold. To finish the raw edge, stitch under 1/4" (6mm), zig-zag, OR overlock/serge. Slipstitch hem in place; press.




**51.** Re-press pleats. Baste hem at side edge. Sew inner edge of front self-facing to front. Baste at upper edge.

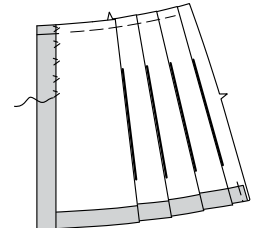


## VIEW C


**52.** To make pleat in POCKET (21), bring solid lines, right sides together, matching small dots. Baste along solid line. Stitch along broken line, from upper and lower edges to dots.




**53.** Press pleat flat, bringing dots to center. Baste across pleat.




**54.** Press under 1/4" (6mm) on upper edge of pocket. Turn upper edge to OUTSIDE along foldline, forming facing. Stitch along seam line on raw edges. Trim seam allowance in the facing area to 1/4" (6mm).



**55.** Turn corners **RIGHT** side out, turning facing to the **WRONG** side. Press, pressing under raw edges along stitching, folding in corners.  
Stitch facing close to inner edge.




**56.** On **OUTSIDE**, pin pocket to **FRONT WRAP** (20), matching large dots. **EDGE****STITCH** and **TOP****STITCH** sides and lower edge.




**57.** Pin **UPPER FLAP** (22) sections, right sides together, matching dots. Stitch sides and lower edge; trim seam.




**58.** Turn right side out; press. Baste raw edges.




**59.** Pin flap (interfaced side down) to upper edge of front wrap, matching notches and small dots, having raw edges even. Baste.  
**FINISH** long edge of front self-facing on wrap.



**60.** Turn lower edge of self-facing to outside on foldline. Stitch across self-facing 1-3/4" (4.5cm) above raw edge. Trim, as shown.

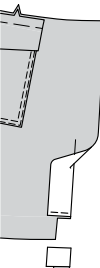


**61.** Turn self-facing to inside, continuing to turn under 1-3/4" (4.5cm) on remainder of lower edge of wrap. Baste close to fold.  
To finish the raw edge, turn under 1/4" (6mm), zig-zag, OR overlock/serge.  
Slip-stitch hem in place; press.



**62.** Baste hem at side edge.




**63.** Sew inner edge of front self-facing to front. Baste at upper edge.




#### FRONT BELT


**64.** **STAY****STITCH** upper edge of wrap.




**65.** Pin interfaced **FRONT BELT** (10) or (23) section to upper edge of wrap, right sides together, matching notches and large dots, clipping wrap where necessary. Stitch; trim seam. Press seam toward front belt. (Uninterfaced front belt will be use as facing.)

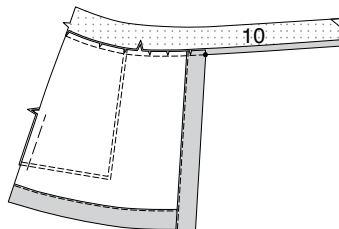


**66.** With right sides together, pin front belt **FACING** (10) or (23) to belt, matching dots. Stitch upper edge and front end, ending at large dot. Trim seam.

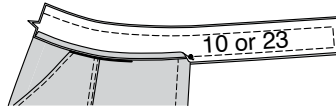


**67.** **UNDER****STITCH** upper edge of facing, ending opposite large dot.




**68.** Turn facing to inside; press.  
Stitch-in-the-ditch- Working on the **RIGHT** side of the fabric, "stitch-in-the-ditch", (in the groove where the front band joins the wrap), being sure to catch in the underneath layer of facing in the stitching.



**69.** Pin wrong side of wrap to right side of skirt front at right side seam, matching notches and small dots, having raw edges even. Baste.

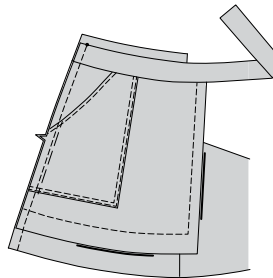


**70.** With right sides together, pin front to back at right side seam, matching notches and seams. Stitch through all layers.

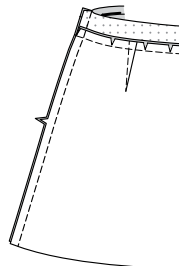


#### WAISTBAND FACING


**71.** Pin right front waistband **FACING** (7) and left front waistband **FACING** (8) to back waistband **FACING** (12) at sides.  
Press under 5/8" (1.5cm) on lower edge of waistband facing, easing as necessary. Trim pressed edge to 3/8" (1cm).

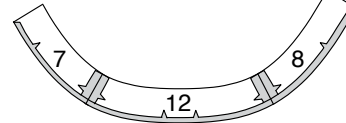


**72.** Pin facing to waistband, right sides together, matching centers and side seams. Stitch front and upper edge; trim seam.

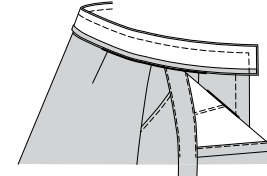

**73.** **UNDER****STITCH** facing as far as possible.




**74.** Turn facing to inside; press.  
Stitch-in-the-ditch- Working on the **RIGHT** side of the fabric, "stitch-in-the-ditch", (in the groove where the waistband joins the skirt), being sure to catch in the underneath layer of facing in the stitching, breaking stitching at wrap.

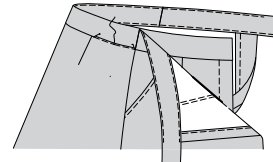


#### FINISHING

##### BUTTONHOLE AND BUTTON


**75.** Open out wrap. Make buttonhole in right front waistband at marking.  
Sew button to left front waistband at marking.



**VIEW A**  
**76.** Open out wrap. Turn up a 1-3/4" (4.5cm) hem on lower edge of skirt.  
Press under 1/4" (6mm) on raw edge.  
Stitch close to inner pressed edge, keeping wrap free.




**77.** To wear, insert front belt tie end through both D-rings. Fold end back and insert between rings, as shown.




##### VIEW B

**78.** Open out wrap. Turn up a 1-3/4" (4.5cm) hem on lower edge of skirt. Baste close to fold.  
**FINISH** the raw edge.  
Slip-stitch hem in place; press.




**79.** To wear, insert front belt tie end through both D-rings. Fold end back and insert between rings, as shown.




##### VIEW C

**80.** Open out wrap. Turn up a 1-3/4" (4.5cm) hem on lower edge of skirt, opening out pleats. Baste close to fold.  
**FINISH** the raw edge.  
Slip-stitch hem in place; press.



**81.** Re-press pleats. Apply metal snap to left tab at small dots, following manufacturer's instructions.  
Slip end of front belt and tab through buckle slider.  
Apply metal snap to belt at small dots, following manufacturer's instructions.





# Congrats!

You've completed your sewing adventure

---

## SHARE YOUR LOOK



Post your pattern and tag us  
[@simplicity\\_creative\\_group](#) and [#simplicitypatterns](#)  
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at  
1-800-782-0323

**McCall's**  
by **design**<sub>group</sub>

McCall's ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA [www.thedesigngroup.com](http://www.thedesigngroup.com) • All Rights Reserved. [www.mccall.com](http://www.mccall.com) • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.