

McCall's

M8483



Designed and printed in USA

Easy

WOMEN'S TOPS AND SKIRTS

Suggested Fabrics: Challis, Cotton Blends, Gauze, Lightweight Linen.

Notions: 1/2" (1.3cm) elastic: 3 3/4 yds. (3.5m) for **A,B**, 4 7/8 yds. (4.4m) for **C,D**.

Sizes	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
European	46	48	50	52	54	56	58	60	62	64

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	42	44	46	48	50	52	54	56	58	60	Ins.
Waist	35	37	39	41 1/2	44	46 1/2	49	51 1/2	53	54 1/2	"
Hip-9" below waist	44	46	48	50	52	54	56	58	60	62	"
Back-neck to waist	17 1/4	17 3/8	17 1/2	17 3/4	17 7/8	17 7/8	18	18 1/8	18 1/4	18 3/8	"

Top A (sits 2" above waist)

45**	2	2	2	2	2 1/8	2 1/8	2 1/8	2 1/8	2 1/8	2 1/4	Yds.
60**	1 1/8	1 1/8	1 1/8	1 1/8	2	2	2	2	2	2 1/8	"

Top and Sash B (sits 2" above waist)

45**	2 1/4	2 3/8	2 3/8	2 3/8	2 1/2	2 1/2	2 3/8	2 3/8	3	3 1/4	Yds.
60**	2 1/4	2 3/8	2 3/8	2 3/8	2 3/8	2 1/2	2 1/2	2 1/2	2 3/8	2 3/8	"

Skirt C

60**	2 1/8	2 1/8	2 1/8	2 1/8	2 1/8	3	3	3	3	3 3/8	Yds.
------	-------	-------	-------	-------	-------	---	---	---	---	-------	------

Skirt D

60**	5	5	5 1/8	5 1/8	5 1/8	5 1/8	5 1/8	5 1/8	5 1/4	5 3/4	Yds.
------	---	---	-------	-------	-------	-------	-------	-------	-------	-------	------

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B Bust 61 1/2 63 1/2 65 1/2 67 1/2 69 1/2 71 1/2 73 1/2 75 1/2 77 1/2 79 1/2 Ins.

C,D Hip 48 50 52 54 56 58 60 62 64 66 "

Finished back length from base of neck

Top A, B (sits 2" above waist)	15 1/4	15 1/2	15 3/4	16	16 1/4	16 1/2	16 3/4	17	17 1/4	17 1/2	Ins.
---------------------------------------	--------	--------	--------	----	--------	--------	--------	----	--------	--------	------

Finished back length from waist

Skirt C	33	33	33	33	33	33	33	33	33	33	Ins.
Skirt D	40	40	40	40	40	40	40	40	40	40	"

*with nap **without nap

Facile

HAUTS ET JUPES POUR FEMMES

Tissus Conseillés: Challis, Cottonnades, Gaze, Toile de lin de poids léger.

Mercerie: Élastique de 1.3cm: 3.5m pour **A,B**, 4.4m pour **C,D**.

Tailles	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
Françaises	48	50	52	54	56	58	60	62	64	66
Européen	46	48	50	52	54	56	58	60	62	64

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine 107 112 117 122 127 132 137 142 147 152 cm

Taille 89 94 99 105 112 118 124 130 134 138 "

Hanches (23cm au-dessous de la taille)

112 117 122 127 132 137 142 147 152 157 cm

Dos du cou à la taille 44 44 44.5 45 45 45.5 46 46 46.5 47 "

Haut A (repose 5cm dessous de la taille)

115cm*	1.8	1.8	1.8	1.8	1.9	1.9	1.9	1.9	1.9	2.1	m
150cm*	1.6	1.7	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.8	"

Haut et ceinture-écharpe B (repose 5cm dessous de la taille)

115cm*	2.1	2.2	2.2	2.2	2.2	2.3	2.3	2.4	2.6	2.7	3.0	m
150cm*	2.1	2.2	2.2	2.2	2.2	2.2	2.3	2.3	2.3	2.3	"	

Jupe C 150cm* 2.6 2.6 2.6 2.6 2.6 2.6 2.7 2.7 2.7 3.1 m

Jupe D 150cm* 4.6 4.6 4.6 4.7 4.7 4.7 4.7 4.7 4.8 5.3 m

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B Poitrine 156 161 166 171 176 181 187 192 197 202 cm

C,D Hanches 122 127 132 137 142 147 152 157 163 168 "


Longueur finie – dos, votre nuque à l'ourlet

Haut A, B (repose 5cm dessous de la taille)	39	39	40	41	41	42	43	43	44	44	cm
--	----	----	----	----	----	----	----	----	----	----	----


Longueur finie – dos, taille à l'ourlet

Jupe C	84	84	84	84	84	84	84	84	84	84	cm
Jupe D	102	102	102	102	102	102	102	102	102	102	"


*avec sens **sans sens



D

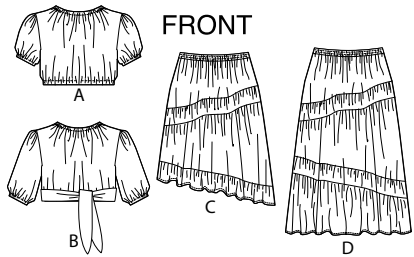


FRONT

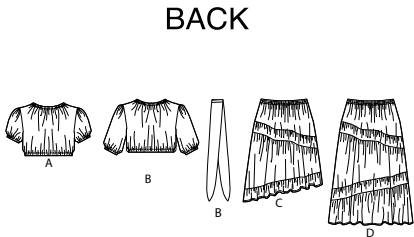


BACK

20 PATTERN PIECES

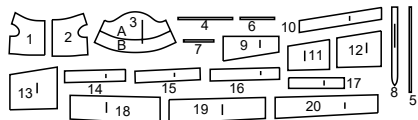

- 1 Front-A,B
- 2 Back-A,B
- 3 Sleeve-A,B
- 4 Elastic Guide for Neck-A,B
- 5 Elastic Guide for Lower Edge-A,B
- 6 Elastic Guide for Sleeve-A
- 7 Elastic Guide for Sleeve-B
- 8 Sash-B
- 9 Yoke Front and Back-C,D
- 10 Tier 1-C,D
- 11 Tier 2-C,D (Right)
- 12 Tier 2-C,D (Center)
- 13 Tier 2-C,D (Left)
- 14 Tier 3-C,D (Right)
- 15 Tier 3-C,D (Center)
- 16 Tier 3-C,D (Left)
- 17 Casing-C,D
- 18 Tier 4-D (Right)
- 19 Tier 4-D (Center)
- 20 Tier 4-D (Left)

PATTERN MARKINGS



GRAINLINE: Place on straight grain of fabric, parallel to selvage or fold.
FOLDLINE: Place line on fold of fabric.
BUTTONHOLE MARKING: Indicates exact length and placement of buttonholes.
BUTTON MARKING: Indicates button placement.
NOTCHES AND SYMBOLS: For matching seams and construction details.
 Indicates the Bustline, Waistline, Hip and/or Biceps. Measurements refer to circumference of Finished Garment (Body Measurement + Wearing Ease + Design Ease). Adjust pattern if necessary. The measurement excludes pleats, tucks, darts and seam allowances.
SEAM ALLOWANCE: 5/8" (1.5cm) included unless otherwise indicated, but not printed on tissue.

ADJUST IF NECESSARY

Lengthen or Shorten at adjustment lines (==) or where indicated on pattern. If substantial length is added, you may need to purchase additional fabric.
TO SHORTEN: Crease along adjustment line. Make a fold half the amount needed. Tape in place.
TO LENGTHEN: Slash between adjustment lines. Spread amount as needed, keeping edges parallel. Tape over paper.
 When Alteration lines are not on tissue, lengthen or shorten at lower edge.

CUTTING AND MARKING

SHRINK FABRIC if not labeled pre-shrunk. Press.

CIRCLE LAYOUT for View, Size, Fabric Width.

Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.

For **DOUBLE THICKNESS (WITH FOLD)** - fold fabric with right sides together.

*** DOUBLE THICKNESS (WITHOUT FOLD)** - For fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).

For **SINGLE THICKNESS** - place fabric right side up. (For Fur Pile fabrics, place pile side down.)

★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. For "Cut 1" pieces, cut piece once on single layer of fabric with piece face up on right side of fabric.

Pattern may have cutting lines for several sizes. Select the proper cutting line or pattern pieces for your size.

Before **CUTTING** place all pieces on fabric according to layout. **Pin.** (Layouts show approximate position of pattern pieces; position may vary according to your pattern size.) Cut **ACCURATELY**, cutting notches outward.

Before removing pattern, **TRANSFER MARKINGS** and lines of construction to Wrong Side of fabric, using the Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be thread traced.

NOTE: Broken-line boxes (a! b! c!) in layouts represent pieces cut by measurements provided.



CUTTING LAYOUTS

RIGHT SIDE OF PATTERN	WRONG SIDE OF PATTERN	RIGHT SIDE OF FABRIC	WRONG SIDE OF FABRIC
-----------------------	-----------------------	----------------------	----------------------



TOP A

use pieces: 1 2 3


45" (115 cm)
with nap
all sizes




60" (150 cm)
with nap
all sizes



45" (115 cm)
with nap
sizes 34W 36W 38W

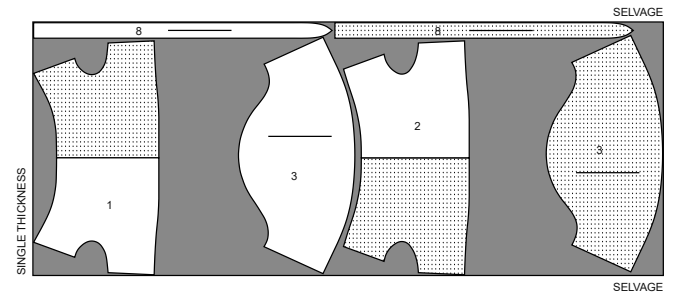



60" (150 cm)
with nap
all sizes

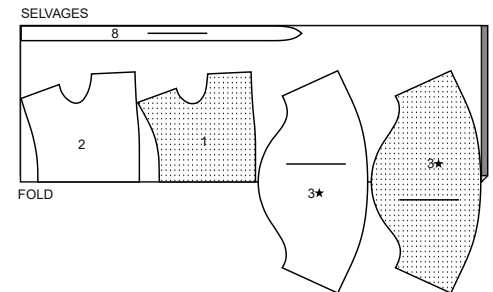

TOP AND SASH B

use pieces: 1 2 3 8


45" (115 cm)
with nap
sizes 20W 22W 24W 26W 28W 30W 32W




SKIRT C

use pieces: 9 10 11 12 13 14 15 16 17

60" (150 cm)
with nap
sizes 20W 22W 24W 26W 28W 30W 32W 34W 36W

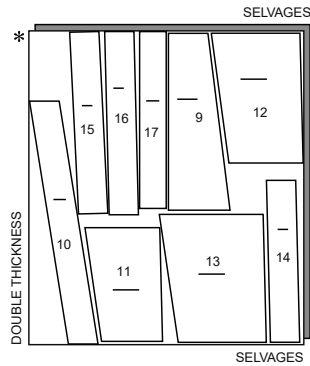


60" (150 cm)
with nap
size 38W

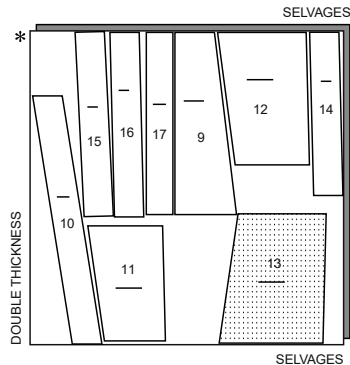


SKIRT D

use pieces: 9 10 11 12 13 14 15 16 17 18 19 20

60" (150 cm)
with nap
sizes 20W 22W 24W 26W 28W 30W 32W 34W 36W

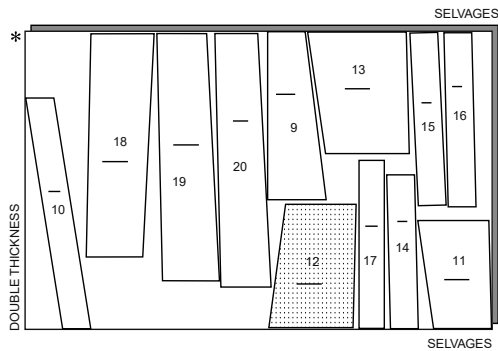


60" (150 cm)
with nap
size 38W

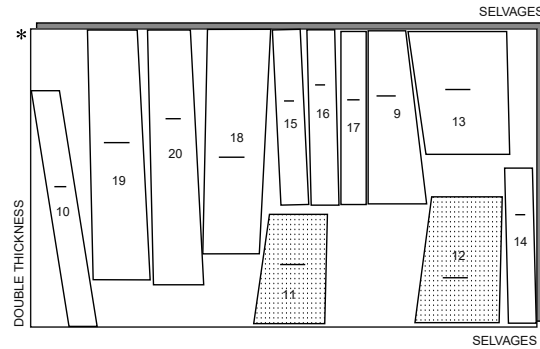


SEWING INFORMATION

FABRIC KEY



SEAM ALLOWANCES

Use 5/8" (1.5cm) seam allowances unless otherwise indicated.



PIN AND FIT

Pin or baste seams, **RIGHT SIDE TOGETHER**, matching notches. Fit garment before stitching major seams.

PRESS

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.

GLOSSARY

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

GATHER - see **Gathering: "sewing two row gathers"** video

NARROW HEM - see **Hems: "sewing narrow hems"** video

SLIPSTITCH - See **Hand Stitching: "how to slip stitch"** video.

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials


SEWING DIRECTIONS

TOP A, B


NOTE: Under each sub-heading, the first View will be illustrated, unless otherwise indicated.

FRONT, BACK AND SLEEVE


1. Stitch **FRONT** (1) to **BACK** (2) at shoulders and sides.




2. To make neck casing for elastic, turn in 7/8" (1cm) seam allowance on neck edge, turning in 1/4" (6mm) on raw edge; press. Stitch, as shown, leaving an opening.




3. Cut one piece of elastic the length of **ELASTIC GUIDE FOR NECK** (4). Insert elastic through opening. Lap ends; hold with safety pin. Try on and adjust if necessary. Stitch ends of elastic securely.




4. Stitch opening, stretching elastic while stitching.




5. To make lower casing for elastic, turn in 7/8" (1cm) seam allowance on lower edge, turning in 1/4" (6mm) on raw edge; press. Stitch, as shown, leaving an opening.




6. Cut one piece of elastic the length of **ELASTIC GUIDE FOR LOWER EDGE** (5). Insert elastic through opening. Lap ends; hold with safety pin. Try on and adjust if necessary. Stitch ends of elastic securely.




7. Stitch opening, stretching elastic while stitching.




8. **GATHER** upper edge of **SLEEVE** (3) between outer small dots.

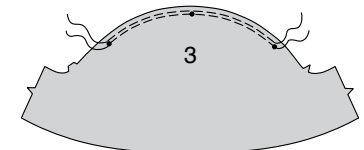


9. Stitch sleeve seam.




10. To make casing for elastic, turn in 7/8" (1cm) seam allowance on lower edge, turning in 1/4" (6mm) on raw edge; press. Stitch, as shown, leaving an opening.




11. Cut elastic the length of ELASTIC GUIDE FOR SLEEVE (6) or (7). Insert elastic through opening. Lap ends; hold with safety pin. Try on and adjust if necessary. Stitch ends of elastic securely.




12. Stitch opening, stretching elastic while stitching.




13. With right sides together, pin sleeve into armhole, placing center small dot at shoulder seam, matching remaining dots. Adjust gathers; baste. Stitch. Stitch again 1/4" (6mm) away in seam allowances. Trim close to second stitching. Turn seam toward sleeve.




View B:
14. Stitch SASH (8) sections together at ends in a 3/8" (1cm) seam.




15. With right sides together, fold sash in half lengthwise, having raw edges even. Stitch in a 3/8" (1cm) seam, leaving an opening for turning.



16. Turn. Press. SLIPSTITCH opening.



17. Make thread loops at side seams, large enough for sash to pass through.



SKIRT C, D


NOTE: Under each sub-heading, the first View will be illustrated, unless otherwise indicated.

FRONT AND BACK


1. GATHER upper edge of one TIER 1 (10) between seamlines. NOTE: Remaining tier section will be used for back.




2. Pin tier to lower edge of one YOKE FRONT AND BACK (9) section, matching centers and notches. Adjust gathers. Baste. Stitch. Stitch again 1/4" (6mm) away in seam allowances. Press seam up. NOTE: Remaining yoke section will be used for back.




3. Stitch one TIER 2 (11), TIER 2 (12) and TIER 2 (13) section together, matching notches. NOTE: Remaining tier sections will be used for back.

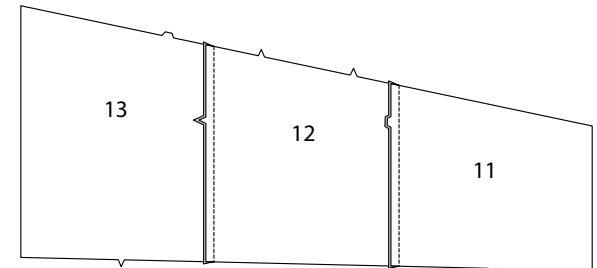


4. GATHER upper edge of tier 2 between seams and seamlines, as shown.

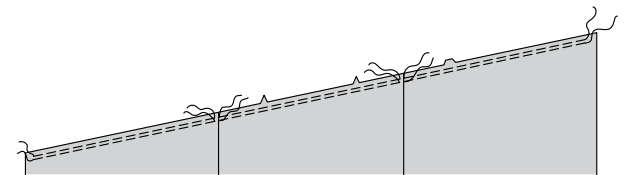


5. Pin tier to lower edge of front, matching centers and notches, placing seams at small dots. Adjust gathers. Baste. Stitch. Stitch again 1/4" (6mm) away in seam allowances. Press seam up.

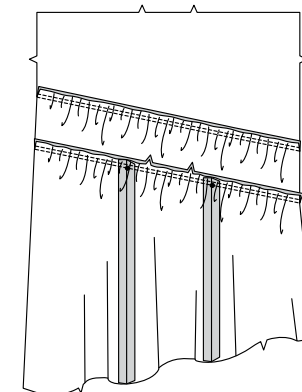


6. Stitch one TIER 3 (14), TIER 3 (15) and TIER 3 (16) section together, matching notches. **NOTE:** Remaining tier sections will be used for back.




7. **GATHER** upper edge of tier 3 between seams and seamlines, as shown.




8. Pin tier to lower edge of front, matching centers, notches, and seams. Adjust gathers. Baste. Stitch. Stitch again 1/4" (6mm) away in seam allowances. Press seam up.

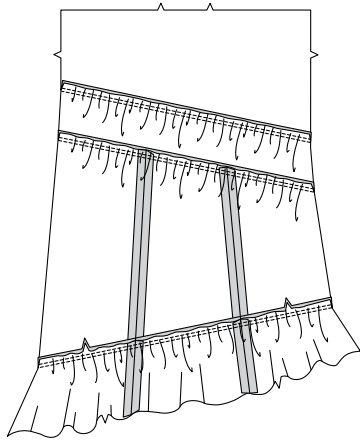


View D:
9. Stitch one TIER 4 (18), TIER 4 (19) and TIER 4 (20) section together, matching notches. **NOTE:** Remaining tier sections will be used for back.




10. **GATHER** upper edge of tier 4 between seams and seamlines, as shown.




11. Pin tier to lower edge of front, matching centers, notches, and seams. Adjust gathers. Baste. Stitch. Stitch again 1/4" (6mm) away in seam allowances. Press seam up.

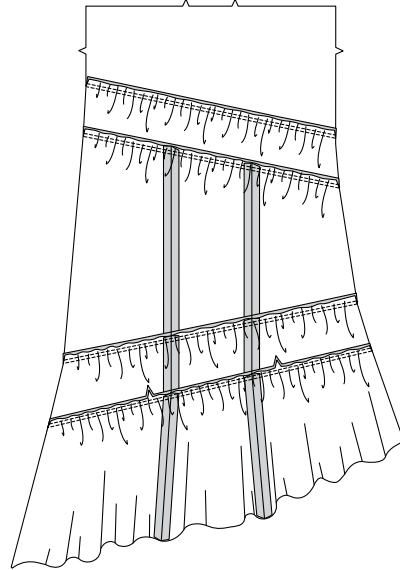

Views C, D:
12. Stitch back together in same manner as front.

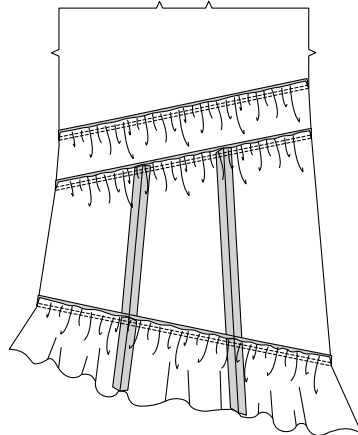

13. Stitch front to back at sides.

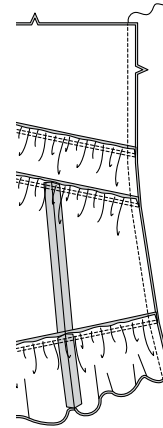


CASING AND FINISHING


14. Stitch CASING (17) sections together at sides leaving open between small dots, as shown.




15. With wrong sides together, fold casing in half lengthwise. Press. Pin raw edges together.




16. Pin casing to upper edge of skirt, matching centers and seams. Stitch. Stitch again 1/4" (6mm) away in seam allowance. Trim close to stitching. Press seam toward skirt.




17. Stitch casing along stitching lines.




18. Cut three pieces of elastic the measurement of waist plus 1" (2.5cm). Insert elastic through openings. Lap ends; hold with safety pin. Try on; adjust if necessary. Stitch ends of elastic securely.



19. **SLIPSTITCH** opening edges together.



20. Make **NARROW HEM** at lower edge of skirt.





Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
[@simplicity_creative_group](#) and [#simplicitypatterns](#)
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-800-782-0323

McCall's
by **design**_{group}