

McCall's

M8488



Designed and printed in USA

Scan QR code for a Sew-Along video tutorial.
Scannez le code QR pour un didacticiel vidéo de couture.



Easy

TODDLERS' KNIT TOPS, SHORTS AND PANTS

Suggested Fabrics: Stretch Knits only such as Cotton Knit, Interlock, Jerseys. See Stretch Gauge.

Interfacing A,B: Fusible Knit.

Notions: B: 1 yd. (1.0m) of 3/8" (1cm) elastic, one pkg. of 1/2" (1.3cm) single fold bias tape.

C,D: 3/4 yd. (0.7m) of 1/2" (1.3cm) elastic (for waist), 3/4 yd. of 1/4" (6mm) elastic (for bands).

Sizes 1/2 1 2 3 4

BODY MEASUREMENTS: Select pattern size based on body measurements

Chest 19 20 21 22 23 Ins.

Waist 18 1/2 19 1/2 20 20 1/2 21 "

Top A 60"* 3/8 1/2 1/2 1/2 1/2 Yd.

Interfacing A,B 20" - 3/8 yd.

Top B 60"* 3/8 3/8 3/4 3/4 7/8 Yd.

Shorts C 60"* - 5/8 yd.

Pants D 60"* 3/4 3/4 7/8 7/8 7/8 Yd.

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

Width, lower edge

Top A,B 32 33 34 35 36 Ins.

Finished back length from base of neck

Top A,B 11 11 1/2 12 12 1/2 13 Ins.

Finished side length from waist

Shorts C (incl. leg band) 11 3/4 12 1/2 12 1/2 13 1/4 Ins.

Pants D (incl. leg band) 16 1/2 18 19 1/2 21 22 1/2 Ins.

*with nap **without nap

Facile

HAUTS, SHORT ET PANTALON EN TRICOT POUR PETITS ENFANTS

Tissus Conseillés: Tricot extensibles seulement tels que Tricot de coton, Interlock, Jerseys.

Reportez-vous au taux d'élasticité. **Entoilage A,B:** Tricot thermocollant.

Merci: B: 1.0m d'élastique de 1cm, 1 paquet de de ruban de biais simple de 1.3cm. **C,D:** 0.7m d'élastique de 1.3cm (pour taille), 0.7m d'élastique de 6mm (pour les bandes).

Tailles 1/2 1 2 3 4

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine 48.5 51 53.5 56 58.5 cm

Taille 47 49.5 51 52 53.5 "

Haut A 150cm* 0.3 0.3 0.5 0.5 0.5 m

Entoilage A,B 51cm - 0.3m

Haut B 150cm* 0.6 0.6 0.7 0.7 0.7 m

Short C 150cm* - 0.6m

Pantalon D 150cm* 0.7 0.7 0.7 0.8 0.8 m

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

Largeur à l'ourlet

Haut A,B 81 84 86 89 91 cm

Longueur finie - dos, votre nuque à l'ourlet


Haut A,B 28 29 30 32 33 cm

Longueur finie - côté, taille à l'ourlet

Short C (y compris le bande de la jambe) 30 31 32 33 34 cm

Pantalon D (y compris le bande de la jambe) 42 46 50 53 57 cm

*avec sens **sans sens



Use the 1 inch (2.54cm) box to ensure you are using rule at 100%


Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.


4" of crosswise folded fabric must **STRETCH** from here
10 cm de tricot plié sur le travers et sur le droit-fil doivent s'étirer de cette limite à celle là
10 cm de tejido de punto doblado (a lo largo y luego al través) deben estirarse desde acá

To Here 35%
jusqu'ici 35%
hasta acá 35%

When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez le taux d'élasticité pour mesurer la capacité d'élasticité des tissus, le taux doit être visible ou imprimé à 100%.
Al utilizar el calibre de elasticidad para medir la capacidad de elasticidad de las telas, el calibre debe estar visible o impreso al 100%.

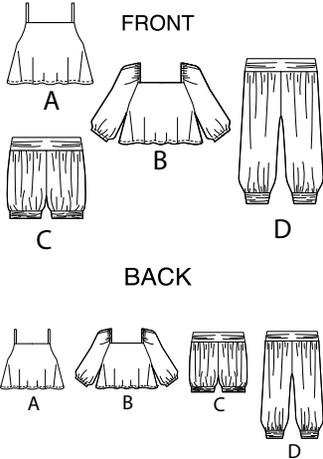


14 PATTERN PIECES

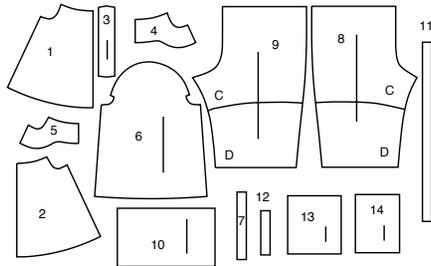


- 1 Front-A,B
- 2 Back-A,B
- 3 Shoulder Strap-A
- 4 Front Facing-A,B
- 5 Back Facing-A,B
- 6 Sleeve-B
- 7 Elastic Guide for Sleeve-B
- 8 Front-C,D
- 9 Back-C,D
- 10 Casing-C,D
- 11 Elastic Guide for Waist-C,D
- 12 Guide for Elastic-C,D
- 13 Leg Band-C
- 14 Leg Band-D


PATTERN MARKINGS

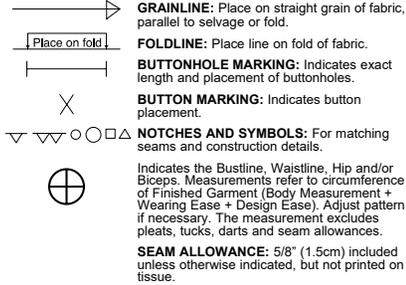

ADJUST IF NECESSARY

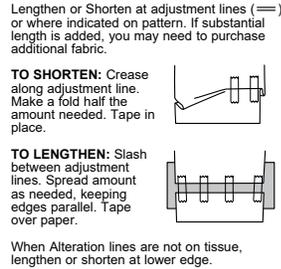

CUTTING AND MARKING

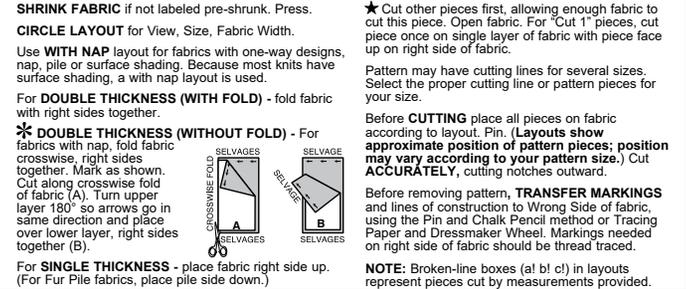


CUTTING LAYOUTS

RIGHT SIDE OF PATTERN	WRONG SIDE OF PATTERN	RIGHT SIDE OF FABRIC	WRONG SIDE OF FABRIC
-----------------------	-----------------------	----------------------	----------------------

INTERFACING A, B

use pieces: 4 5


20" (51 cm)
without nap
all sizes



SHORTS C

use pieces: 8 9 10 13


60" (150 cm)
with nap
all sizes



TOP A

use pieces: 1 2 3 4 5


60" (150 cm)
with nap
all sizes



PANTS D

use pieces: 8 9 10 14


60" (150 cm)
with nap
all sizes




TOP B

use pieces: 1 2 4 5 6

60" (150 cm)
with nap
all sizes




SEWING INFORMATION
FABRIC KEY

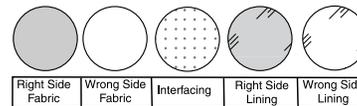

SEAM ALLOWANCES

Use 5/8" (1.5cm) seam allowances unless otherwise indicated.



PIN AND FIT

Pin or baste seams, RIGHT SIDE TOGETHER, matching notches. Fit garment before stitching major seams.

PRESS

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.

GLOSSARY

Sewing terms appearing in **BOLD TYPE** in Sewing Instructions are explained below.

EDGESTITCH - Stitch along seamline, using long machine stitches. Pull thread ends when adjusting to fit.

NOTE: For sleeve caps, make a second row of long machine stitches 1/4" (6mm) away in seam allowance, for more control.

FINISH - Stitch 1/4" (6mm) from raw edge and finish with one of the following: (1) Pink OR (2) Overcast OR (3) Turn in along stitching and stitch close to fold OR (4) Overlock.

OPTIONAL FOR HEMS: Apply Seam Binding.


NARROW HEM - Turn in hem; press, easing in fullness if necessary. Open out hem. Turn in again so raw edge is along crease; press. Turn in along crease; stitch.

REINFORCE - Stitch along seamline where indicated in sewing instructions, using small machine stitches.

UNDERSTITCH - Open out facing or underside of garment; stitch to seam allowance close to seam.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.


STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

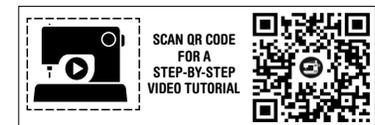

TOP A, B


INTERFACING

1. Fuse INTERFACING to wrong side of each matching FABRIC section, following manufacturer's instructions.




FRONT AND BACK

2. With right sides together, stitch FRONT (1) to BACK (2) at sides.

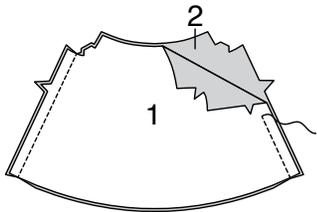


3. NARROW HEM lower edge of garment.



STRAPS A


4. Fold STRAP (3) in half lengthwise, with wrong sides together. Stitch in a 3/8" (1cm) seam, leaving ends open. Trim seam.



5. Turn strap right side out. Press. Baste raw edges together.




6. On outside, pin strap to front matching small and large dots. Baste.




SLEEVE B


7. REINFORCE inner corners of SLEEVE (6), pivoting at small dots, as shown. Clip to small dots.

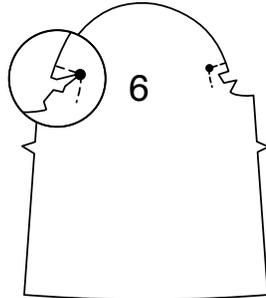


8. Open out one folded edge of bias tape. Press out crease and reshape tape to match curve of upper edge by pressing lightly.

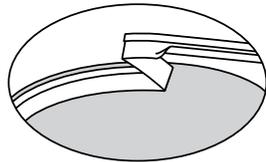


9. With right sides together, pin bias tape to upper edge of sleeve between clips, placing crease along the 3/8" (1cm) seamline, turning in ends. Stitch along crease on tape. Trim sleeve seam allowance even with bias tape.

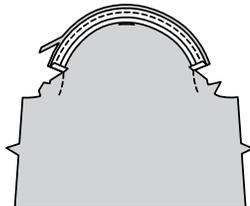


10. Turn bias tape to inside along seam. Press. To form casing, stitch close to lower long edge.




11. Cut four pieces of elastic the length of ELASTIC GUIDE FOR SLEEVE (7). Insert elastic through upper casing, extending ends 5/8" (1.5cm) beyond casing. Pin in place. Stitch across ends of casing, catching elastic in stitching. To reduce bulk, trim ends of elastic, being careful not to cut sleeve.

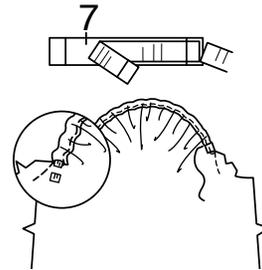

12. To form lower casing, turn 1/2" (1.3cm) on lower edge of sleeve to inside; turn under 1/4" (6mm) on raw edge. Press. Stitch close to inner pressed edge, leaving ends open.




13. Insert remaining pieces of elastic through lower casing, extending ends 5/8" (1.5cm) beyond casing. Pin in place. Stitch across ends of casing, catching elastic in stitching. To reduce bulk, trim ends of elastic, being careful not to cut sleeve.

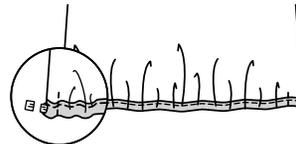

14. Stitch sleeve seam.



15. Pin sleeve to armhole edge, matching seams, notches and symbols. Baste.

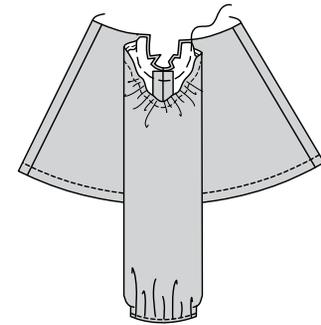


FINISHING

16. With right sides together, stitch FRONT FACING (4) to BACK FACING (5) at sides.

FINISH lower edge of facing.




17. With right sides together, pin facing to upper edge of garment matching symbols, having raw edges even. Stitch pivoting at small dots, leaving an opening between large and small dots on back, for View A.

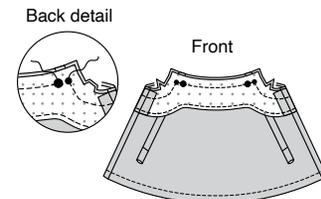

18. VIEW A - Open out back facing. Insert free ends of straps through openings in back, matching large and small dots. Pin.


Try on and adjust to fit if necessary.

Pin seam allowances together and stitch seam through all thicknesses, as shown.

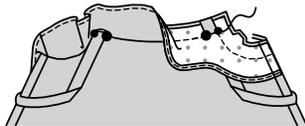

19. UNDERSTITCH facing, as far as possible.


Turn facing to inside. Press. Hand-tack at side seams to secure.

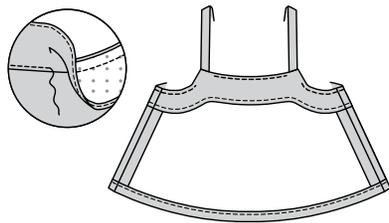


SHORTS C, PANTS D

FRONT AND BACK


1. Stitch FRONT (8) and BACK (9) together at inner leg and sides.



2. For crotch seam, turn one pant leg right side out; slip inside remaining pant leg. Stitch. Stitch again 1/4" (6mm) away in seam allowance along curve, as shown. Trim close to second stitching.



3. With right sides together, stitch one side seam of CASING (10) sections. Press seam open.




4. Cut a piece of elastic the length of ELASTIC GUIDE FOR WAIST (11).


On inside, pin elastic to casing placing long edge just below fold line, having edges even, as shown. **EDGESTITCH**, stretching elastic while stitching. Stitch across ends of elastic.

NOTE: Stitching will show on inside of casing.

Trim away ends of elastic within seam allowance.

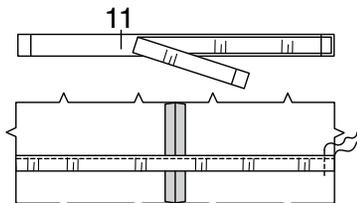


5. Pin remaining side seam together. Stitch. Press seam open.




6. Cut two pieces of elastic the measurement of GUIDE FOR ELASTIC (12).

On inside, center elastic along each side of casing seam, stretching elastic to fit, having edges even. Stitch in the ditch or "groove" of seam, securing elastic, as shown.

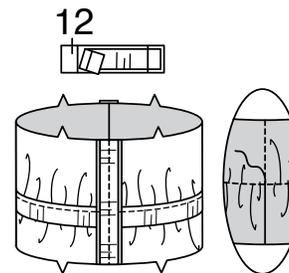


7. With wrong sides together, fold waistband in half along fold line. Pin.




8. With stitching facing up, pin casing to upper edge of pants matching side seams and notches, stretching casing to fit. Baste. Stitch. Stitch again 1/4" (6mm) away, within seam allowance. Trim close to second stitching.

Press seam down, pressing casing out.

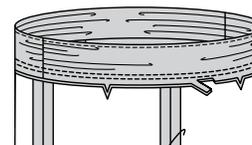


FINISHING

9. With right sides together, pin LEG BAND (13 OR 14) sections together matching notches. Stitch side seams.

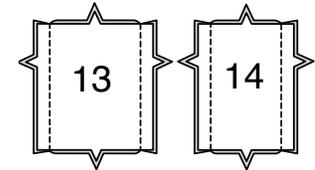

10. Cut four pieces of elastic the length of guide for elastic (12).

On inside, pin elastic to one side of seam allowance, stretching elastic to fit. Baste. Stitch. Press seam open.




11. Fold leg band in half lengthwise with wrong sides together, matching notches. Pin.



12. On outside, pin leg band to lower edge of pants/shorts matching side seams and notches, stretching band to fit. Baste. Stitch. Stitch again 1/4" (6mm) away, within seam allowance. Trim close to second stitching.

Press seam up, pressing band out.

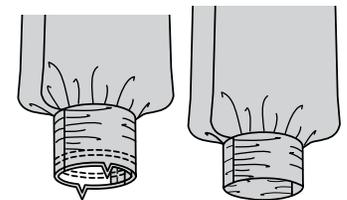



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
[@simplicity_creative_group](#) and [#simplicitypatterns](#)
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-800-782-0323

McCall's
by **design**_{group}

McCall's ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.mccall.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.