


**McCall's**

M8502

*Brandi*  
JOAN

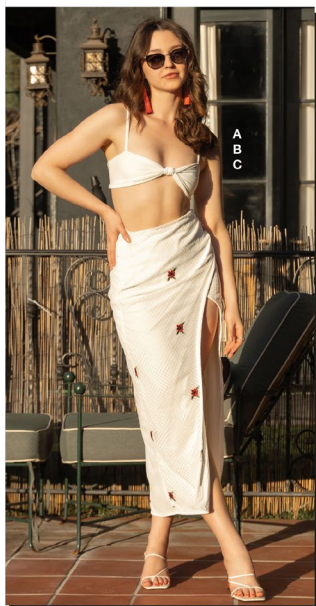

Scan QR code for a **Sew-Along** video tutorial.  
Scannez le code QR pour un didacticiel vidéo de couture.

Designed and printed in USA

Average

**MISSES' BIKINI AND SKIRT**

**Suggested Fabrics:** Stretch Knits only such as Novelty Knit, Swimwear Knits. See Stretch Gauge. **C also in** Cotton Knits, Interlock, Jersey.

**Notions:** **A:** Pair of 3/8" (1cm) bra strap sliders and rings. **B:** 2 7/8 yds. (2.7m) of 1/4" (6mm) elastic. **C:** 1 1/4 yds. (1.2m) of 1" (2.5cm) elastic.

Sizes	4	6	8	10	12	14	16	18	20	22
European	30	32	34	36	38	40	42	44	46	48

**BODY MEASUREMENTS: Select pattern size based on body measurements**

<b>Bust</b>	29 1/2	30 1/2	31 1/2	32 1/2	34	36	38	40	42	44	Ins.
<b>Waist</b>	22	23	24	25	26 1/2	28	30	32	34	37	"
<b>Hip-9" below waist</b>	31 1/2	32 1/2	33 1/2	34 1/2	36	38	40	42	44	46	"
<b>Back-neck to waist</b>	15 1/4	15 1/2	15 3/4	16	16 1/4	16 1/2	16 3/4	17	17 1/4	17 1/2	"

<b>Top A</b>	60"*	3/4	3/4	3/4	3/4	3/4	3/4	7/8	7/8	7/8	7/8	Yds.
--------------	------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------

<b>Bottom B</b>	60"*	1	1	1	1 1/8	1 1/8	1 1/8	1 1/4	1 1/4	1 1/8	1 1/8	Yds.
-----------------	------	---	---	---	-------	-------	-------	-------	-------	-------	-------	------

<b>Skirt C</b>	60"*	1 3/8	1 3/8	1 3/8	1 3/8	1 1/2	1 1/2	1 1/2	1 1/2	1 5/8	1 5/8	Yds.
----------------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

**FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)**

<b>C Hip</b>	33	34	35	36	37 1/2	39 1/2	41 1/2	43 1/2	45 1/2	47 1/2	Ins.
<b>Finished back length from waist</b>	38	38	38	38	38	38	38	38	38	38	Ins.

\*with nap \*\*without nap

Moins Facile

**BIKINI ET JUPE POUR JEUNES FEMMES**

**Tissu Conseillé:** Tricot extensibles seulement tels que Tricot Fantaisie, Tricot pour maillots de bain. Reportez-vous au taux d'élasticité. **Caussi en** Tricot de coton, Interlock, Jersey.

**Mercurie:** **A:** Paire de régleurs soutien-gorge de 1cm. **B:** 2.7m d'élastique de 6mm. **C:** 1.2m d'élastique de 2.5cm.

Tailles	4	6	8	10	12	14	16	18	20	22
Françaises	32	34	36	38	40	42	44	46	48	50
Européen	30	32	34	36	38	40	42	44	46	48

**MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps**

<b>Poitrine</b>	75	78	80	83	87	92	97	102	107	112	cm
<b>Taille</b>	56	58	61	64	67	71	76	81	87	94	"

**Hanches (23cm au-dessous de la taille)**

	80	83	85	88	92	97	102	107	112	117	cm
--	----	----	----	----	----	----	-----	-----	-----	-----	----

<b>Dos du cou à la taille</b>	39	39.5	40	40.5	41.5	42	42.5	43	44	44.5	"
-------------------------------	----	------	----	------	------	----	------	----	----	------	---

**Partie inférieure B**

150cm*	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.8	0.8	m
--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

<b>Jupe C</b>	150cm*	1.1	1.1	1.1	1.3	1.4	1.4	1.4	1.4	1.5	m
---------------	--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

**MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)**

<b>C Hanches</b>	84	86	89	91	95	100	105	110	116	121	cm
<b>Longueur finie – dos, taille à l'ourlet</b>	97	97	97	97	97	97	97	97	97	97	cm

\*avec sens \*\*sans sens



Use the 1 inch (2.54cm) box to ensure you are using rule at 100%



Utilisez la boîte de 2,54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.


**4" of crosswise folded fabric must STRETCH from here**  
**10 cm de tricot plié sur le travers et sur le droit-fil doivent s'étirer de cette limite à celle là**  
**10 cm de tejido de punto doblado (a lo largo y luego al través) deben estirarse desde acá**

**To Here 75%**  
**jusqu'ici 75%**  
**hasta acá 75%**

When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.  
 Quand vous utilisez le taux d'élasticité pour mesurer la capacité d'élasticité des tissus, le taux doit être visible ou imprimé à 100%.  
 Al utilizar el calibre de elasticidad para medir la capacidad de elasticidad de las telas, el calibre debe estar visible o impreso al 100%.

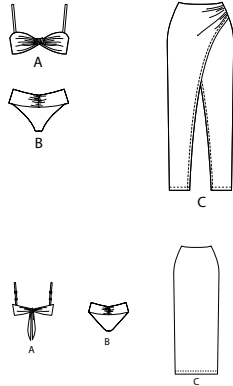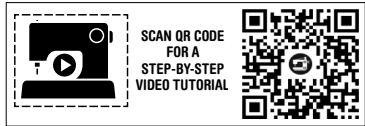

15 PATTERN PIECES

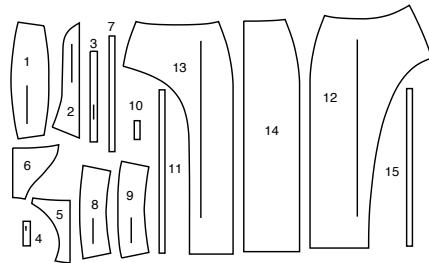

- 1 Front-A
- 2 Back-A
- 3 Shoulder Strap-A
- 4 Loop-A
- 5 Front-B
- 6 Back-B
- 7 Elastic Guide for Leg-B
- 8 Yoke Front-B
- 9 Yoke Back-B
- 10 Guide for Elastic-B
- 11 Elastic Guide for Waist-B
- 12 Right Front-C
- 13 Left Front-C
- 14 Back-C
- 15 Guide for Elastic-C

**PATTERN MARKINGS**

- GRAINLINE:** Place on straight grain of fabric, parallel to selvage or fold.
- FOLDLINE:** Place line on fold of fabric.
- BUTTONHOLE MARKING:** Indicates exact length and placement of buttonholes.
- BUTTON MARKING:** Indicates button placement.
- NOTCHES AND SYMBOLS:** For matching seams and construction details.
- Indicates the Bustline, Waistline, Hip and/or Biceps.** Measurements refer to circumference of Finished Garment (Body Measurement + Wearing Ease + Design Ease). Adjust pattern if necessary. The measurement excludes pleats, tucks, darts and seam allowances.
- SEAM ALLOWANCE:** 5/8" (1.5cm) included unless otherwise indicated, but not printed on tissue.

**ADJUST IF NECESSARY**

- Lengthen or Shorten at adjustment lines (==) or where indicated on pattern. If substantial length is added, you may need to purchase additional fabric.
- TO SHORTEN:** Crease along adjustment line. Make a fold half the amount needed. Tape in place.
- TO LENGTHEN:** Slash between adjustment lines. Spread amount as needed, keeping edges parallel. Tape over paper.
- When Alteration lines are not on tissue, lengthen or shorten at lower edge.

**CUTTING AND MARKING**

- SHRINK FABRIC** if not labeled pre-shrunk. Press.
- CIRCLE LAYOUT** for View, Size, Fabric Width.
- Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.
- For **DOUBLE THICKNESS (WITH FOLD)** - fold fabric with right sides together.
- \* DOUBLE THICKNESS (WITHOUT FOLD)** - For fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).
- For **SINGLE THICKNESS** - place fabric right side up. (For Fur Pile fabrics, place pile side down.)
- ★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. For "Cut 1" pieces, cut piece once on single layer of fabric with piece face up on right side of fabric.
- Pattern may have cutting lines for several sizes. Select the proper cutting line or pattern pieces for your size.
- Before **CUTTING** place all pieces on fabric according to layout. Pin. (Layouts show approximate position of pattern pieces; position may vary according to your pattern size.) Cut **ACCURATELY**, cutting notches outward.
- Before removing pattern, **TRANSFER MARKINGS** and lines of construction to Wrong Side of fabric, using the Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be thread traced.
- NOTE:** Broken-line boxes (a! b! c!) in layouts represent pieces cut by measurements provided.


**CUTTING LAYOUTS**

RIGHT SIDE OF PATTERN	WRONG SIDE OF PATTERN	RIGHT SIDE OF FABRIC	WRONG SIDE OF FABRIC
-----------------------	-----------------------	----------------------	----------------------

**TOP A**

USE PIECES: 1 2 3 4


60" (150 CM)  
WITHOUT NAP  
ALL SIZES



**SKIRT C**

USE PIECES: 12 13 14


60" (150 CM)  
WITHOUT NAP  
ALL SIZES

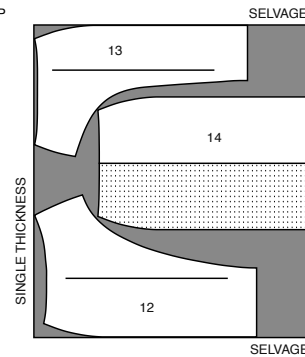

**BOTTOMS B**


USE PIECES: 5 6 8 9

60" (150 CM)  
WITHOUT NAP  
ALL SIZES

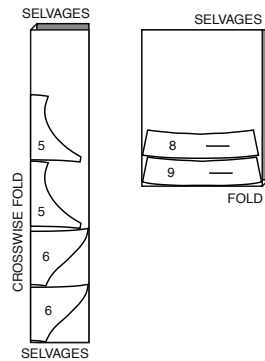


**SEWING INFORMATION**

**FABRIC KEY**



**SEAM ALLOWANCES**

Use 1/4" (6mm) seam allowances unless otherwise indicated.



**PIN AND FIT**

Pin or baste seams, **RIGHT SIDE TOGETHER**, matching notches. Fit garment before stitching major seams.

**PRESS**

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.

**GLOSSARY**


Sewing terms appearing in **BOLD TYPE** in Sewing Instructions are explained below.

**GATHER** - Loosen needle tension slightly. With **RIGHT** side up, stitch 5/8" (1.5cm) from cut edge using a long stitch. Stitch again 1/4" (6mm) from the first stitching within the seam allowance.

**NARROW HEM** - Press under hem allowance as indicated on tissue pattern. To form narrow hem, tuck under raw edge to meet crease. Press. Stitch hem in place.

**SLIPSTITCH** - Slide needle through a folded edge, then pick up a thread of underneath fabric.

**UNDERSTITCH** - Press facing and seam away from garment, stitching through facing and seam allowances close to seam.




**PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.**


**STITCH 5/8" (1.5CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.**

### BIKINI TOP A


1. Pin FRONT (1) to BACK (2) at side edges. Stitch.




2. Fold SHOULDER STRAP (3) in half, lengthwise, with RIGHT sides together. Stitch long edge in a scant 1/4" (6mm) seam. With a needle, attach a strong thread to one end of strap.




3. Draw needle eye forward, through fold, turning shoulder strap RIGHT side out.




4. Make LOOP (4) in the same manner as shoulder strap. Thread loop through ring section. Fold loop in half bringing small and large dots together. On OUTSIDE, pin loop to back, matching small and large dots. Baste.




5. Thread end of strap over center bar of slider along foldline. Turn under raw edge 3/8" (1cm). Stitch in place, securely.




6. Thread end through ring, and weave through outer bars of slider.




7. Pull strap through slider leaving ample room for future adjustment, having both RIGHT and LEFT straps equal. On OUTSIDE, pin shoulder strap to front, matching small and large dots. Baste.



8. Stitch side edges of front and back lining in the same manner as for top. With RIGHT sides together and raw edges even, pin lining to top, matching centers. Stitch, leaving an opening in lower edge for turning.

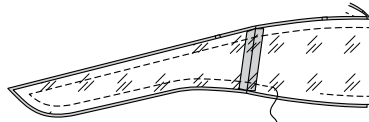


9. Turn lining to inside; press, pressing out the straps. SLIPSTITCH opening closed.




10. Tie knot in center of front.

Tie ends of back together when wearing, as shown on back of envelope.




### BIKINI BOTTOM B

1. With RIGHT sides together and raw edges even, pin FRONT (5) to BACK (6) at lower edge, matching notches. Stitch.




2. Stitch front and back lining sections together in the same manner.


With RIGHT sides together and raw edges even, pin lining to bottom at leg edges. Stitch. To form casing for elastic, stitch again 3/8" (1cm) from first stitching within the seam allowance.




3. UNDERSTITCH the lining. Turn lining to INSIDE; press. For each leg, cut a piece of elastic the length of the ELASTIC GUIDE FOR LEG (7). Attach a safety pin to one end of elastic, and thread through casing, matching small dots. Stitch securely in place at small dots. Baste raw edges together.



4. With RIGHT sides together and raw edges even, pin YOKE FRONT (8) to YOKE BACK (9) at RIGHT side seam. Stitch.




5. With RIGHT sides together and raw edges even, pin yoke to front and back, matching small dots and notches. Baste.




6. Stitch RIGHT side seam of yoke front and yoke back lining sections together in the same manner as yoke.


Cut two pieces of elastic the length of GUIDE FOR ELASTIC (10). Transfer markings. On INSIDE, pin elastic sections to centers of front and back yoke lining, matching small dots. Stitch between the dots, stretching the elastic to fit.

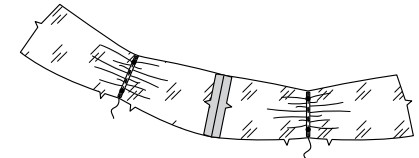


7. With RIGHT sides together and raw edges even, pin yoke lining to yoke (over front and back), matching small dots and notches. Stitch through all thicknesses.




8. Roll up front and back between yoke and yoke lining.

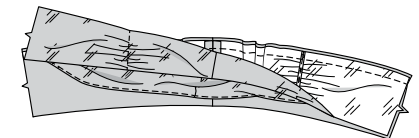


9. With RIGHT sides together and raw edges even, pin remaining long edge of yoke to yoke lining matching seams and small dots. Stitch long edge leaving LEFT edges open.




10. Press seam open. With RIGHT sides together, insert hand through tube, grabbing notched end. Draw end through tube to meet opposite end, matching notches and seams, having raw edges even, being careful not to catch in edges of front and back, as shown. Stitch, leaving an opening on lining to turn.



11. Turn bottom RIGHT side out through opening in left lining seam. Slipstitch opening closed. Press lightly.




12. To create front and back ruching, stretch out elastic at center front and back lining, on OUTSIDE, stitch along center front and back, catching in elastic on INSIDE.




### SKIRT C


1. GATHER LEFT side edge of RIGHT FRONT (12) between the small dots. NARROW HEM side front edge from side edge to 5" (12.5cm) above lower edge.

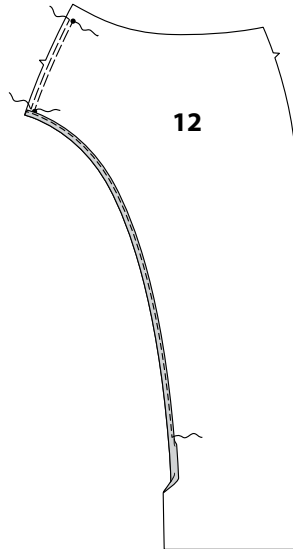


2. NARROW HEM side front edge of LEFT FRONT (13) from side edge to 5" (12.5cm) above lower edge.

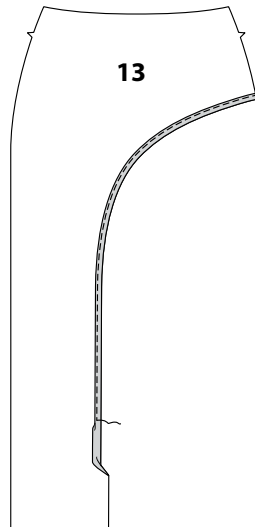


3. Pin WRONG side of right front to the right side of left front. Baste right and upper edges together. Pin right front to left front at left side edge, matching small dots and notches, pulling up gathering stitches to fit. Baste.




4. With RIGHT sides together and raw edges even, pin front to BACK (14) at side edges. Stitch.

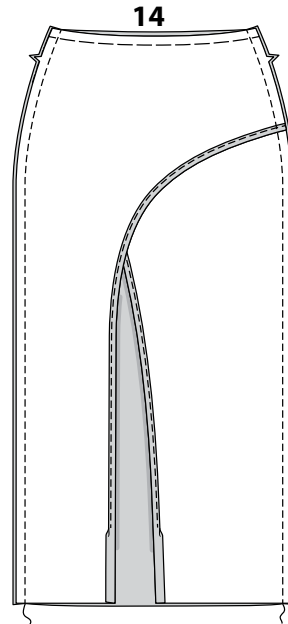


5. Press up 1-1/4" (3.2cm) hem allowance on lower edge. Stitch in place 1/4" (6mm) from raw edge. Finish NARROW HEM on side front edges, connecting to previous stitching.




6. Cut a piece of elastic the length of GUIDE FOR ELASTIC (15). Transfer markings. Lap back edges of elastic together matching marking. Stitch, squaring stitches, as shown.



7. On OUTSIDE, pin upper edge of elastic to upper edge of skirt along the seamline, matching centers and placing small dots at side seams. Stitch close to upper edge of elastic.

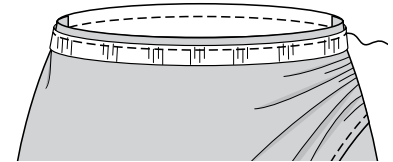

8. Turn elastic to INSIDE; press. On INSIDE, tack elastic in place at side seams, by stitching over previous stitching.

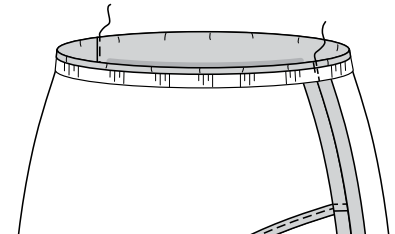



# Congrats!

You've completed your sewing adventure

---

**SHARE  
YOUR** LOOK



Post your pattern and tag us  
[@simplicity\\_creative\\_group](#) and [#simplicitypatterns](#)  
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](#)

Have a question or need help with your sewing project call us at  
1-800-782-0323

**McCall's**  
by **design**<sub>group</sub>

McCall's ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA [www.thedesigngroup.com](#) • All Rights Reserved. [www.mccall.com](#) • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.