

McCall's

M8591



Designed and printed in USA

Average

BABIES' ROMPER, DRESSES AND HEADBAND

Suggested Fabrics: Batiste, Broadcloth, Chambray, Cotton Blends, Gingham, Poplin. **D** in Stretch Knits only such as: Bamboo, Cotton Knit, ITY, Jersey, Single Knit. See Stretch Gauge.

Notions: **A,B,C:** 2½ yds. (2.3m) of ¼" (6mm) elastic, 14" (36cm) length of ¾" (2cm) snap tape, one pkg. of ½" (1.3cm) single fold bias tape, elastic thread.

Sizes	XS	S	M	L	
Age	1-3	6	12	18	

BODY MEASUREMENTS: Select pattern size based on body measurements

Weight	8-12	13-17	18-21	22-25	lbs.
Height	18-24	25-26	27-28	29-30	Ins.

Romper A	45**	7%	¾	1	1	Yd.
	60**	9%	¾	¾	¾	"
Dress B	45**	1½	1½	1½	1¾	Yds.
	60**	1½ <td>1½</td> <td>1¾</td> <td>1¾</td> <td>"</td>	1½	1¾	1¾	"
Dress C	45**	1¾	1¾	1¾	1¾	Yds.
	60**	1¾ <td>1¾</td> <td>1¾</td> <td>1¾</td> <td>"</td>	1¾	1¾	1¾	"

Headband D 60** - ¾ yd.

*with nap **without nap

Moins Facile

BARBOTEUSE, ROBES ET BANDEAU DE TÊTE POUR BÉBÉS

Tissus Conseillés: Batiste, Broadcloth, Chambray, Cotonnades, Vichy, Popeline. **D** en tricots extensibles seulement tels que: Tricot de Bambou, Tricot de coton, Tricots interlock en fil retors, Tricot jersey, Tricot simple. Reportez-vous au taux d'élasticité.

Mercurie: **A,B,C:** 2.3m d'élastique de 6mm, 36cm de longueur de ruban de pressions de 2cm, un paquet de ruban de biais simple de 1.3cm, fil élastique.

Tailles	TP	P	M	G	
Âge	1-3	6	12	18	


MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poids	3.5-5.5	6-8	8-9.5	10-11.5	kg
Hauteur	46-61	64-66	69-71	74-76	cm

Barboteuse A	115cm*	0.8	0.8	0.9	0.9	m
	150cm*	0.6	0.6	0.7	0.7	"
Robe B	115cm*	1.4	1.4	1.5	1.6	m
	150cm*	1.0	1.0	1.1	1.1	"
Robe C	115cm*	1.5	1.6	1.6	1.7	m
	150cm*	1.0	1.0	1.1	1.1	"

Bandeau de tete D 150cm* - 0.3m

*avec sens **sans sens

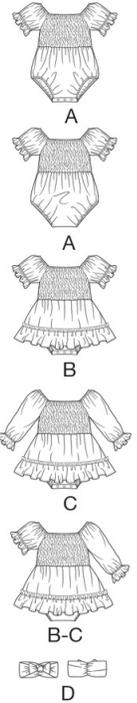

Use the 1 inch (2.54cm) box to ensure you are using rule at 100%


Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.


4" of crosswise folded fabric must STRETCH from here
10 cm de tricot plié sur le travers et sur le droit-fil doivent s'étirer de cette limite à celle là
10 cm de tejido de punto doblado (a lo largo y luego al través) deben estirarse desde acá

To Here 50%
jusqu'ici 50%
hasta acá 50%

When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez le taux d'élasticité pour mesurer la capacité d'élasticité des tissus, le taux doit être visible ou imprimé à 100%.
Al utilizar el calibre de elasticidad para medir la capacidad de elasticidad de las telas, el calibre debe estar visible o impreso al 100%.

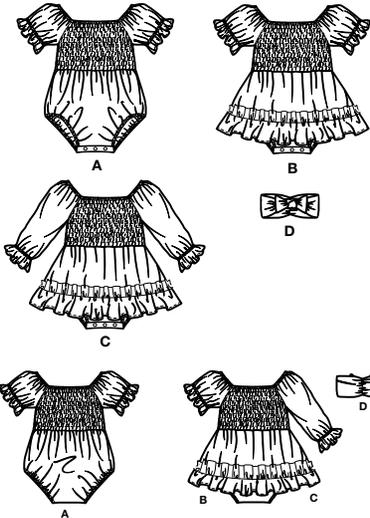

14 PATTERN PIECES

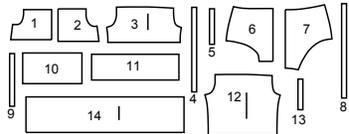

- 1 Bodice Front-A,B,C
- 2 Bodice Back-A,B,C
- 3 Sleeve-A,B
- 4 Elastic Guide Upper-A,B,C
- 5 Elastic Guide for Sleeve-A,B
- 6 Panties Front-A,B,C
- 7 Panties Back-A,B,C
- 8 Elastic Guide for Waist-A,B,C
- 9 Elastic Guide for Leg-A,B,C
- 10 Overskirt Front and Back-B,C
- 11 Ruffle-B,C
- 12 Sleeve-C
- 13 Elastic Guide for Sleeve-C
- 14 Headband-D

PATTERN MARKINGS

- GRAINLINE:** Place on straight grain of fabric, parallel to selvage or fold.
- FOLDLINE:** Place line on fold of fabric.
- BUTTONHOLE MARKING:** Indicates exact length and placement of buttonholes.
- BUTTON MARKING:** Indicates button placement.
- NOTCHES AND SYMBOLS:** For matching seams and construction details.
- Indicates the Bustline, Waistline, Hip and/or Biceps.** Measurements refer to circumference of Finished Garment (Body Measurement + Wearing Ease + Design Ease). Adjust pattern if necessary. The measurement excludes pleats, tucks, darts and seam allowances.
- SEAM ALLOWANCE:** 5/8" (1.5cm) included unless otherwise indicated, but not printed on tissue.

ADJUST IF NECESSARY

- Lengthen or Shorten at adjustment lines (==)** or where indicated on pattern. If substantial length is added, you may need to purchase additional fabric.
- TO SHORTEN:** Crease along adjustment line. Make a fold half the amount needed. Tape in place.
- TO LENGTHEN:** Slash between adjustment lines. Spread amount as needed, keeping edges parallel. Tape over paper.
- When Alteration lines are not on tissue, lengthen or shorten at lower edge.

CUTTING AND MARKING


- SHRINK FABRIC** if not labeled pre-shrunk. Press.
- CIRCLE LAYOUT** for View, Size, Fabric Width.
- Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.
- For **DOUBLE THICKNESS (WITH FOLD)** - fold fabric with right sides together.
- * DOUBLE THICKNESS (WITHOUT FOLD)** - For fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).
- For **SINGLE THICKNESS** - place fabric right side up. (For Fur Pile fabrics, place pile side down.)
- ★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. For "Cut 1" pieces, cut piece once on single layer of fabric with piece face up on right side of fabric.**
- Pattern may have cutting lines for several sizes. Select the proper cutting line or pattern pieces for your size.
- Before **CUTTING** place all pieces on fabric according to layout. Pin. (**Layouts show approximate position of pattern pieces; position may vary according to your pattern size.**) Cut **ACCURATELY**, cutting notches outward.
- Before removing pattern, **TRANSFER MARKINGS** and lines of construction to Wrong Side of fabric, using the Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be thread traced.
- NOTE:** Broken-line boxes (a| b| c) in layouts represent pieces cut by measurements provided.

CUTTING LAYOUTS


RIGHT SIDE OF PATTERN	WRONG SIDE OF PATTERN	RIGHT SIDE OF FABRIC	WRONG SIDE OF FABRIC
-----------------------	-----------------------	----------------------	----------------------

ROMPER A
USE PIECES: 1 2 3 6 7

45" (115 CM)
WITH NAP
ALL SIZES




60" (150 CM)
WITH NAP
ALL SIZES




DRESS C
USE PIECES: 1 2 6 7 10 11 12

45" (115 CM)
WITH NAP
ALL SIZES

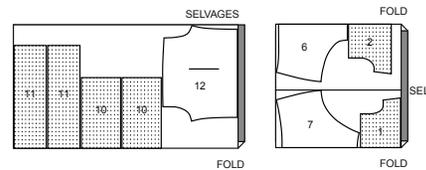


60" (150 CM)
WITH NAP
ALL SIZES

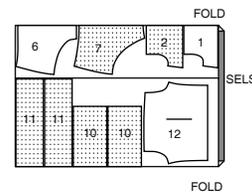


DRESS B
USE PIECES: 1 2 3 6 7 10 11

45" (115 CM)
WITH NAP
ALL SIZES

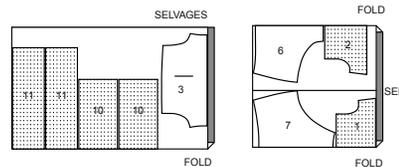


60" (150 CM)
WITH NAP
ALL SIZES




HEADBAND D
USE PIECE: 14

60" (150 CM)
WITH NAP
ALL SIZES




SEWING INFORMATION
FABRIC KEY

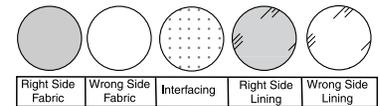

SEAM ALLOWANCES

Use 5/8" (1.5cm) seam allowances unless otherwise indicated.



PIN AND FIT

Pin or baste seams, **RIGHT SIDE TOGETHER**, matching notches. Fit garment before stitching major seams.

PRESS

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.


GLOSSARY

Sewing Terms Appearing In **Bold Type** In Sewing Instructions Are Explained Below.

GATHER - Stitch along seamline and again 1/4" (6mm) away in seam allowance, using long machine stitches. Pull thread ends when adjusting to fit.

NARROW HEM - Turn in hem; press, easing in fullness if necessary. Open out hem. Turn in again so raw edge is along crease; press. Turn in along crease; stitch.

SLIPSTITCH - Slide needle through a folded edge, then pick up a thread of undermate fabric.

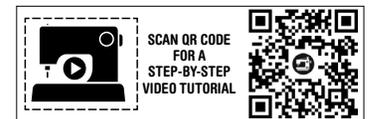


PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED. STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

ROMPER A, DRESS B, C


NOTE: The first view mentioned will be shown, unless otherwise mentioned.

BODICE


1. Prepare machine for shirring by threading sewing bobbin by hand with elastic thread, using slight tension. Use regular thread on the machine needle. Stitch some test samples to find the best stitch length and thread tension for your machine.

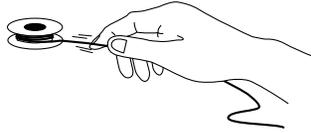


2. To shirr each **BODICE FRONT (1)** and **BODICE BACK (2)** section, sew along stitching lines. Stitch along armhole and side seamlines, just inside of seam allowance, across ends of elastic threads to secure.

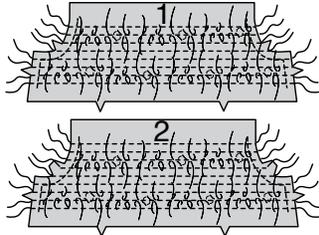


3. Stitch bodice front to bodice back at sides, **RIGHT** sides together, matching notches and rows of shirring.

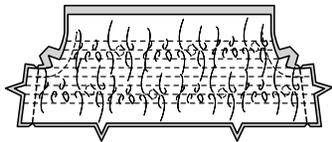


4. Stitch underarm seam in **SLEEVE (3 or 12)**.

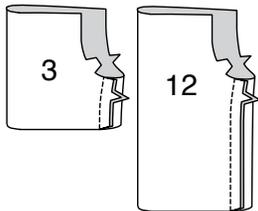



5. Make a 5/8"(1.5cm) **NARROW HEM** on lower edge of sleeve.




6. To form casing, on inside, center bias tape over casing line, turning in ends to meet at seam. Stitch close to both long edges.




7. Cut two pieces of 1/4"(6mm) wide elastic using **ELASTIC GUIDE FOR SLEEVE (5 or 13)**. Insert elastic through opening in casing. Overlap ends and pin with a safety pin. Try on and adjust if necessary. Stitch ends securely.




8. **SLIPSTITCH** opening in casing closed.





9. With **RIGHT** sides together, pin sleeve to armhole edge, matching notches and underarm seams. Baste. Stitch. Stitch again 1/4"(6mm) away in seam allowances. Trim close to second stitching. Press seam allowances toward sleeve.




10. For casing, turn 5/8"(1.5cm) on upper edge of bodice to **INSIDE**, turning in 1/4"(6mm) on raw edge. Stitch close to inner edge, leaving an opening on back for elastic.



11. Cut a piece of 1/4"(6mm) wide elastic using **ELASTIC GUIDE UPPER (4)**. Insert elastic through casing, lapping ends 5/8"(1.5cm). Pin with a safety pin. Try on and adjust, if necessary. Stitch ends of elastic securely.




12. Stitch opening in casing, stretching elastic as you stitch.




PANTIES

13. Stitch **PANTIES FRONT (6)** to **PANTIES BACK (7)** at sides.

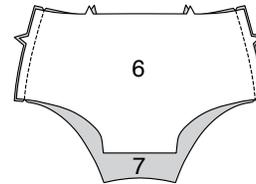


14. To form casing, turn 5/8"(1.5cm) to **INSIDE** on lower edge of panties, turning in 1/4"(6mm) on raw edge. Press. Stitch close to inner edge.

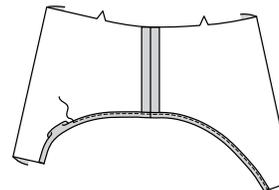


15. Cut two pieces of 1/4"(6mm) wide elastic using **ELASTIC GUIDE FOR LEG (9)**. Insert elastic through casing, having ends even with raw edges. Stitch across ends of casing. To reduce bulk, pull out ends of elastic and cut close to stitching.


NOTE: When applying snap tape, be sure to line up socket and ball strips so they will match when snapped.

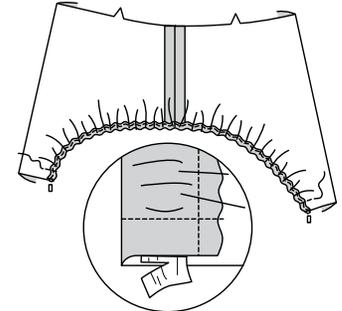


16. With **RIGHT** side up, pin ball section of snap tape to **RIGHT** side of panties front inner leg seam allowance, having one long edge 1/4"(6mm) from seamline, turning in ends. Using a zipper foot, stitch tape in place, as shown.

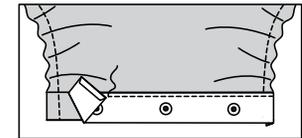


17. Turn snap tape to **INSIDE** along seamline. Stitch close to remaining long edge. **SLIPSTITCH** ends of tape in place.

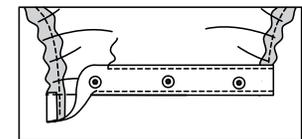

18. Pin **WRONG** side of socket section of snap tape to **WRONG** side of panties back inner leg seam allowance, having one long edge 1/4"(6mm) from seamline, turning in ends. Stitch.

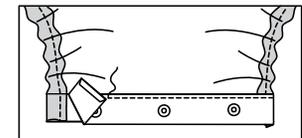


19. Turn snap tape to OUTSIDE along seamline. Stitch close to remaining long edge. **SLIPSTITCH** ends of tape in place.

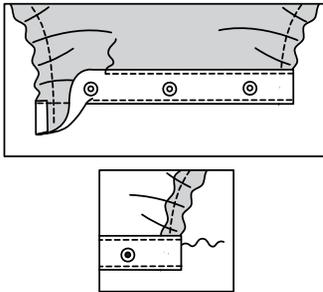

OVERSKIRT B, C


20. Stitch **OVERSKIRT FRONT AND BACK** (10) sections together at sides. **GATHER** upper edge, breaking stitching at seams.

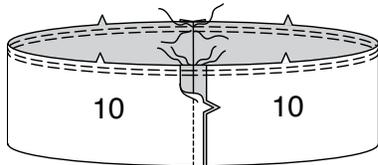


21. Stitch **RUFFLE** (11) sections at sides.




22. Make a 5/8" (1.5cm) **NARROW HEM** on lower edge of ruffle.




23. Fold upper edge of ruffle along foldline, **WRONG** sides together. Press. To **GATHER**, stitch along gathering line using long machine stitches, breaking stitching at seams.



24. With **RIGHT** sides up, pin ruffle to overskirt, placing gathering line along stitching line, matching centers and side seams. Adjust gathers. Baste. Stitch along gathering line.

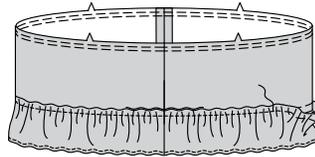


25. With **RIGHT** sides up, pin overskirt to upper edge of panties, matching centers, notches, and side seams. Adjust gathers. Baste.


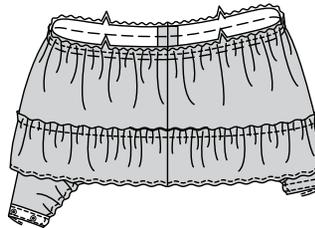


CONTINUE AS FOLLOWS FOR VIEWS A, B, C


26. With **RIGHT** sides together, pin panties (and overskirt for **Views B, C**) to bodice matching centers, notches and side seams. Baste. Stitch. To form casing, stitch seam allowances together 1/4" (6mm) from raw edges, leaving an opening to insert elastic.

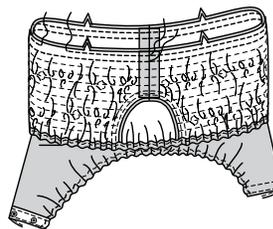

27. Cut a piece of 1/4" (6mm) wide elastic using **ELASTIC GUIDE FOR WAIST** (8). Insert elastic through casing, lapping ends 5/8" (1.5cm). Pin with a safety pin. Try on and adjust, if necessary. Stitch ends of elastic securely.




28. Stitch opening in casing, stretching elastic as you stitch. Turn casing toward bodice.




HEADBAND D

1. Fold **HEADBAND** (14) along foldline, **RIGHT** sides together, having raw edges even. Stitch, leaving an opening for turning.




2. Turn **RIGHT** side out. Press. **SLIPSTITCH** opening closed.

Hand gather along center line.



3. Pull up gathers to measure 1-1/2" (3.8cm). Stitch close to both sides of center line to secure gathers.



4. To wear, wrap around head and tie in a bow.





Congrats!

You've completed your sewing adventure

SHARE YOUR LOOK



Post your pattern and tag us using [#simplicitypatterns](#)
[@simplicity_creative_group](#)
[@simplicitymccallsuk](#)
[@simplicitymccallsaustralia](#)
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](#) or for customers outside the U.S. and Canada visit [sewdirect.com](#) and [sewdirect.com.au](#)

Have a question or need help with your sewing project contact us:
[Simplicity.com](#) [Sewdirect.com](#) [Sewdirect.com.au](#)

McCall's
by **design**_{group}

McCall's ©2025 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA [www.thedesigngroup.com](#) • All Rights Reserved. [www.mccall.com](#) • Made in the U.S.A. Fabriqué aux États-Unis.
To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.