

ME2008



@handmademillennial



>> MISSES' AND WOMEN'S JUMPSUIT
 SKILL LEVEL: AVERAGE




PDF PATTERNS

THINGS YOU NEED:

> **A,B:** One invisible zipper: 22" (56cm) for Miss, 24" (61cm) for Women.

SUGGESTED FABRICS:


> Challis, Rayon, Cotton Blends, Crepe de Chine, Silky Types, Stretch Wovens.

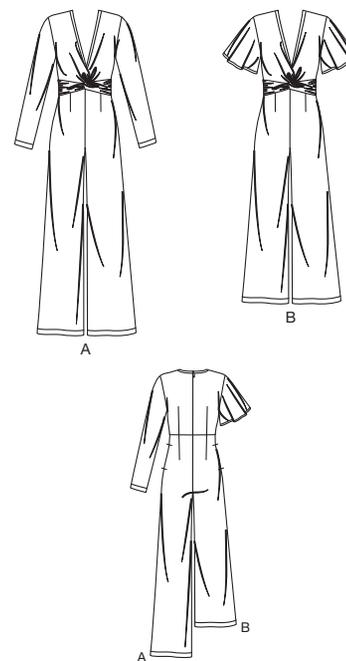

Your printed tile pieces should be assembled before you move on to this step!

PIECES (9)

- 1 Bodice Front-A,B
- 2 Front Band Facing-A,B
- 3 Bodice Back-A,B
- 4 Neck Binding-A,B
- 5 Sleeve-A
- 6 Pants Front-A,B(cl.B)
- 7 Pocket-A,B
- 8 Pants Back-A,B(cl.B)
- 9 Sleeve-B

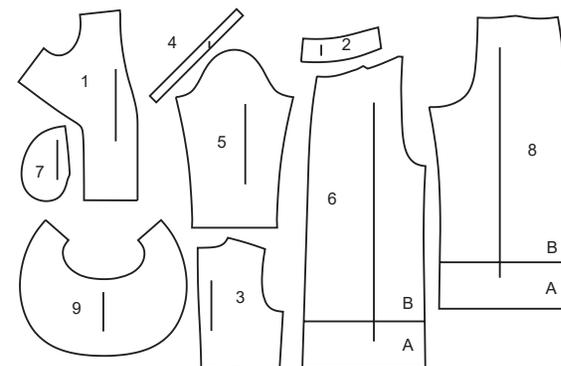

FINISHED GARMENT MEASUREMENTS CONTINUED



MISSES'						WOMEN'S										
SIZES	10	12	14	16	18	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W	
WIDTH, EACH LEG																
JUMPSUIT A	28½	29	29½	30	30½	35¼	36	36¾	37½	38¼	39	39¾	40½	41¼	42	ins.
	73	74	75	76	78	90	92	93	95	97	99	101	103	105	107	cm.
JUMPSUIT B	28	28½	29	29½	30	34¾	35½	36¼	37	37¾	38½	39¼	40	40¾	41½	ins.
	71	73	74	75	76	88	90	92	94	96	98	100	102	104	106	cm.

BODY MEASUREMENTS

MISSES'						WOMEN'S										
SIZES	10	12	14	16	18	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W	
BUST	32½	34	36	38	40	42	44	46	48	50	52	54	56	58	60	ins.
	83	87	92	97	102	107	112	117	122	127	132	137	142	147	152	cm.
WAIST	25	26½	28	30	32	35	37	39	41½	44	46½	49	51½	54	56½	ins.
	64	67	71	76	81	89	94	99	105	112	118	124	131	138	144	cm.
HIP	34½	36	38	40	42	44	46	48	50	52	54	56	58	60	62	ins.
	88	92	97	102	107	112	117	122	127	132	137	142	147	152	157	cm.
BACK-NECK TO WAIST LENGTH	16	16¼	16½	16¾	17	17¼	17¾	17½	17¾	17¾	17¾	18	18¾	18½	18¾	ins.
	40.5	41.5	42	42.5	43	44	44	44.5	45	45	45.5	46	46	47	47.5	cm.


CUTTING AND MARKING

- > **SHRINK FABRIC** if not labeled pre-shrunk. Press.
- > **CIRCLE LAYOUT** for View, Size, Fabric Width.
- > Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.
- > For **DOUBLE THICKNESS (WITH FOLD)**, fold fabric with right sides together.
- > ***DOUBLE THICKNESS (WITHOUT FOLD)**, for fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).
- > For **SINGLE THICKNESS**, place fabric right side up. (For Fur Pile fabrics, place pile side down.)

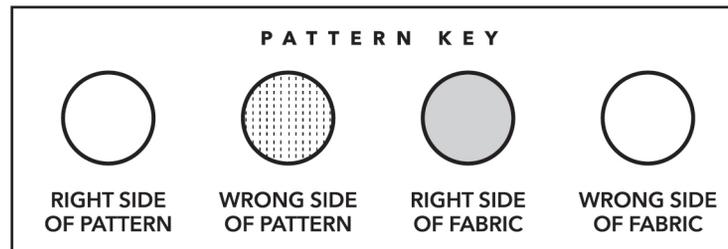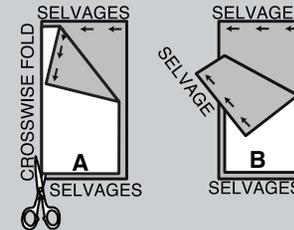

- > Before **CUTTING**, place all pieces on fabric according to layout. Pin.
(Layouts show approximate position of pattern pieces; position may vary according to your pattern size.)
- > ★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. Cut piece on single layer of fabric with piece face up on right side of fabric.
- > Cut accurately, cutting notches outward.
- > Before removing pattern, **TRANSFER MARKINGS** and lines of construction to **WRONG SIDE** of fabric, using Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be thread traced.
NOTE: Broken-line boxes (a! b! c!) in layouts represent pieces cut by measurements provided.
- > Prewash your fabric using a method that's suitable for the fabric type.
- > Fold fabric with right sides together, matching **SELVAGES**.
- > Pin your pattern pieces to the fabric as shown below and cut them out using a sharp pair of dressmaker's shears.

PATTERN MARKINGS

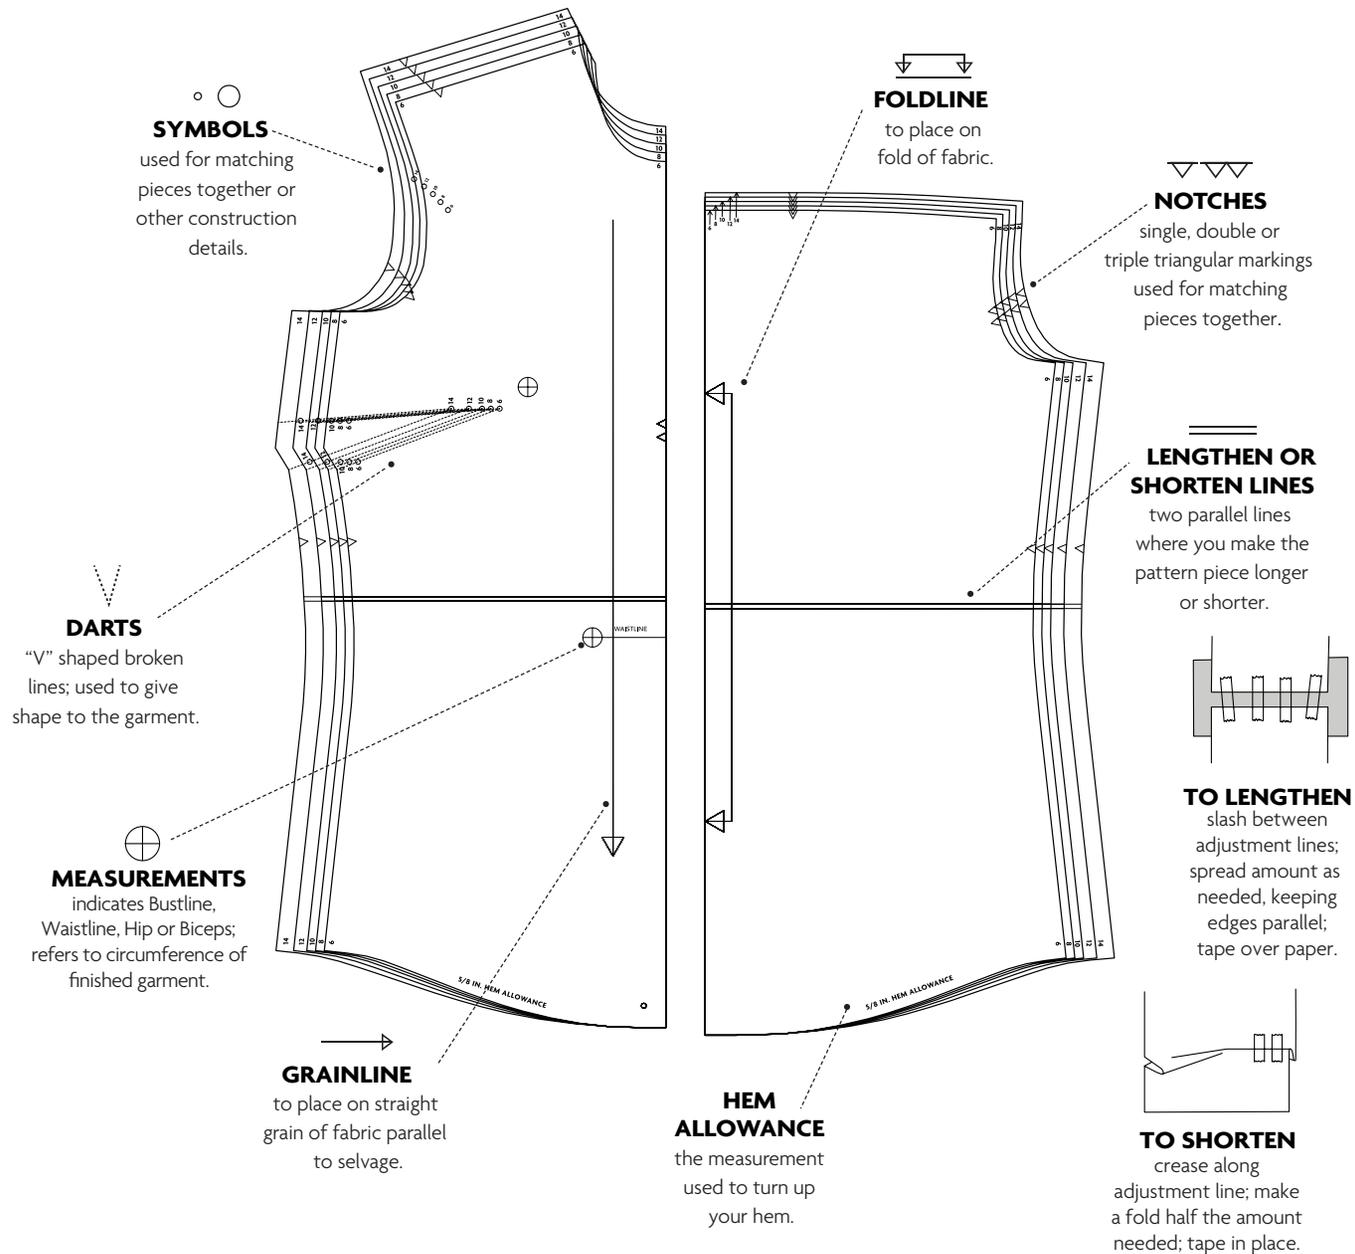


CUTTING LAYOUTS


JUMPSUIT A

use pieces: 1,2,3,4,5,6,7,8


45" (115 cm)
with nap
sizes 10-12-14-16-18

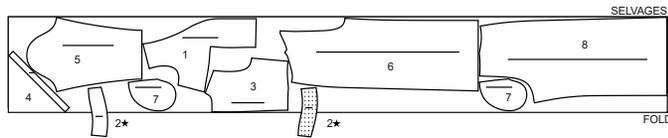


45" (115 cm)
with nap
sizes 20W-22W-24W-26W-28W-30W

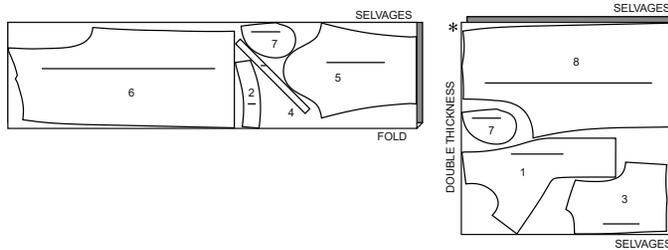


45" (115 cm)
with nap
sizes 32W-34W-36W-38W

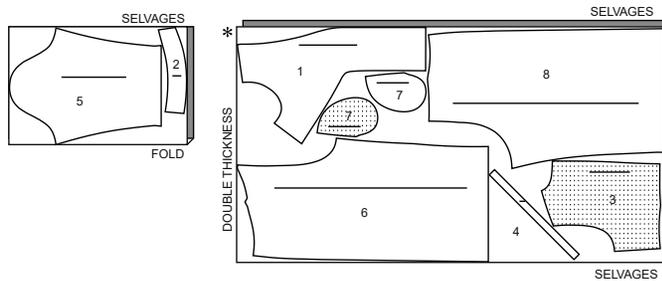


60" (150 cm)
with nap
sizes 10-12-14-16-18

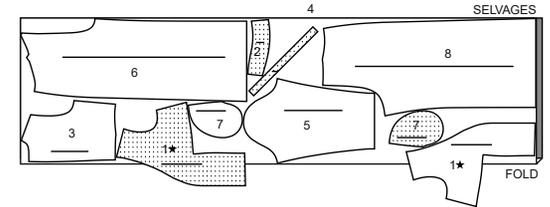

60" (150 cm)
with nap
sizes 20W-22W-24W-26W-28W-30W

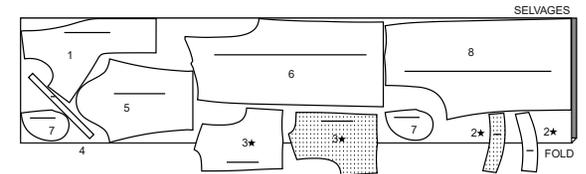


60" (150 cm)
with nap
sizes 32W-34W-36W-38W

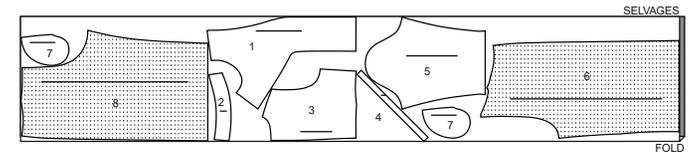

JUMPSUIT B


use pieces: 1,2,3,4,6,7,8,9

45" (115 cm)
with nap
sizes 10-12-14-16-18

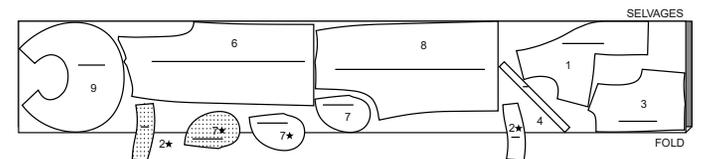


CUTTING LAYOUTS CONTINUED


45" (115 cm)
with nap
sizes 20W-22W-24W-26W-28W-30W

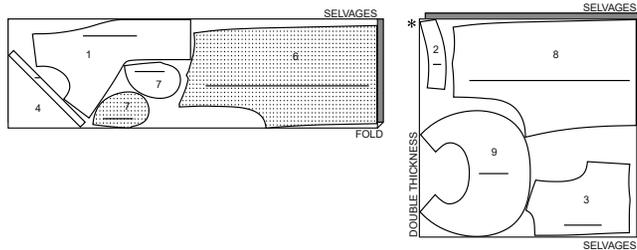


45" (115 cm)
with nap
sizes 32W-34W-36W-38W

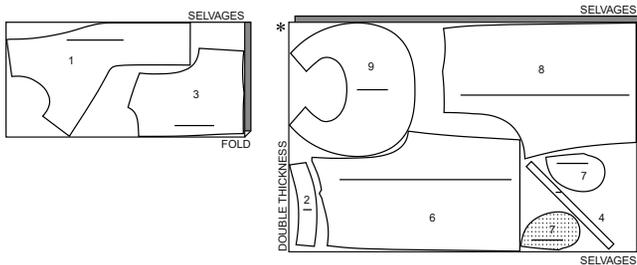


60" (150 cm)
with nap
sizes 10-12-14-16-18

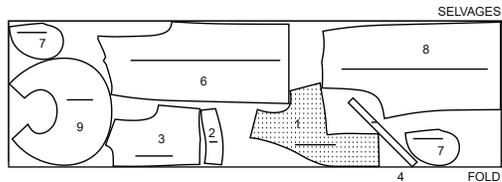

60" (150 cm)
with nap
sizes 20W-22W-24W-26W-28W-30W

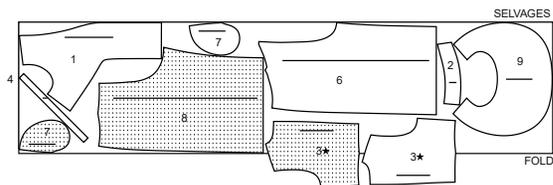

60" (150 cm)
with nap
sizes 32W-34W-36W-38W

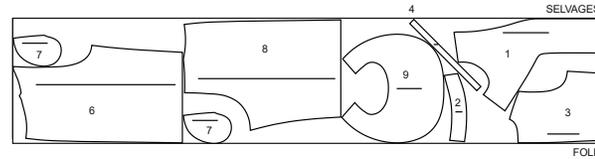

PATTERN PIECES WILL BE IDENTIFIED
BY NUMBERS THE FIRST TIME THEY ARE USED.


SEWING INFORMATION

5/8" (1.5cm) SEAM ALLOWANCES ARE INCLUDED,
(unless otherwise indicated)
ILLUSTRATION SHADING KEY

Right Side	Wrong Side	Interfacing	Lining	Underlining

Pin or baste seams, right side together, matching notches. Fit garment before stitching major seams.

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.



GLOSSARY

Sewing terms appearing in **BOLD TYPE** in Sewing Instructions are explained below.

EASESTITCH - Stitch along seamline, using long machine stitches. Pull thread ends when adjusting to fit.

NOTE: For sleeve caps, make a second row of long machine stitches 1/4" (6mm) away in seam allowance. for more control.

GATHER - Stitch along seamline and again 1/4" (6mm) away in seam allowance, using long machine stitches. Pull thread ends when adjusting to fit.

NARROW HEM - Turn in hem; press, easing in fullness if necessary. Open out hem. Turn in again so raw edge is along crease; press. Turn in along crease; stitch.

STAYSTITCH - Stitch 1/8" (3mm) from seamline in seam allowance (usually 1/2" (1.3cm) from raw edge).

UNDERSTITCH - Open out facing or underside of garment; stitch to seam allowance close to seam.




@handmademillennial

SEWING DIRECTIONS


JUMPSUIT A, B

Bodice


1. GATHER lower edge of **BODICE FRONT (1)** between the large and small dots. Stitch bodice front sections together from upper large dot to upper small dot at center front, back-stitching at dots to reinforce the seams.

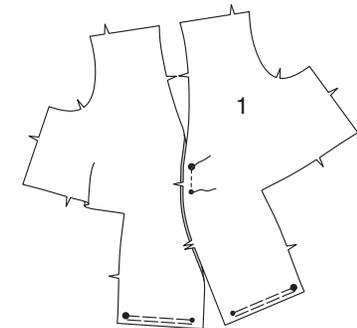


2. On outside, lap right front over left band, matching large dots, as shown.

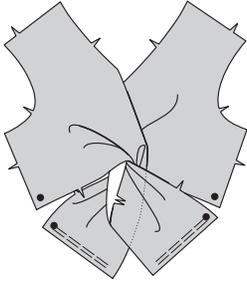


3. Turn up front band on left side with right sides together, matching large dots, small dots, and notches. Stitch from side edge to small dot, back-stitching at dot to reinforce the seam.
Turn up front band on right side and stitch in the same manner.

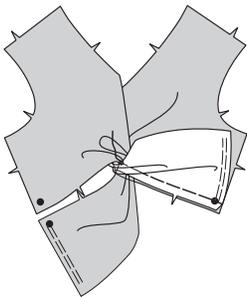


4. Stitch center front edges of FRONT BAND FACING (2) sections together. Press seam open.




5. Pin the right side of the facing to the wrong side of bodice over seam, matching large dots, small dots, and notches. Stitch over previous stitching as far as possible, breaking stitching at center.

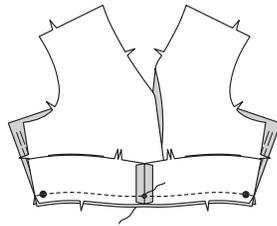


6. On inside, pull front bands down at center front, matching small and large dots. Stitch center front edges between the small and large dots, back-stitching at dots to reinforce the seam.

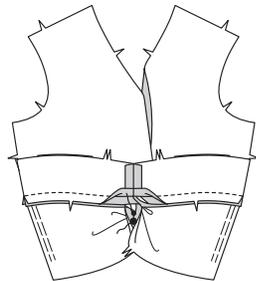

7. Turn lower edge of front band and facing down, matching small dots, large dots, and notches, pulling up gathering stitches to fit. Baste side and lower edges together.




8. To make darts in BODICE BACK (3), with right sides together, fold the fabric through the center of the dart, bringing broken lines and small dots together. Stitch the dart from wide end to point. Press dart toward center.
STAYSTITCH neck edge of bodice back.
Stitch front to back at shoulder and side edges, matching small and large dots.

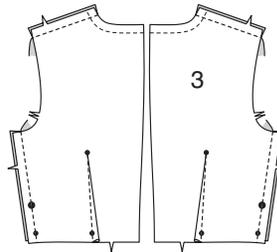


Sleeve A

9. **EASESTITCH** top of SLEEVE (5) between notches. Stitch underarm seam. Press up hem allowance. Turn under raw edge 1/4" (6mm); press. Stitch close to inner pressed edge.




10. With right sides together, pin sleeve to armhole edge with center small dot at shoulder seam, matching underarm seams, notches and remaining small dots. Adjust ease.
Baste. Stitch. Stitch again 1/8" (3mm) from first stitching. Trim seam below notches close to stitching. Press only the seam allowance toward sleeve, shrinking out fullness.




Sleeve B

11. **EASESTITCH** top of SLEEVE (9) between notches. Stitch underarm seam. Machine-stitch 5/8" (1.5cm) from lower edge.
NARROW HEM.




12. With right sides together, pin sleeve to armhole edge with center small dot at shoulder seam, matching underarm seams, notches and remaining small dots. Adjust ease.
Baste. Stitch. Stitch again 1/8" (3mm) from first stitching. Trim seam below notches close to stitching. Press only the seam allowance toward sleeve, shrinking out fullness.

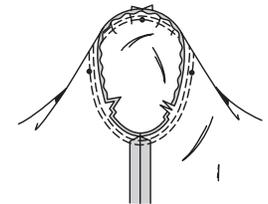


Pants


13. To make darts in PANTS FRONT (6) and PANTS BACK (8), with right sides together, fold the fabric through the center of the dart, bringing broken lines and small dots together. Stitch the dart from wide end to point. Press dart toward center. **STAYSTITCH** upper edge of pant sections.

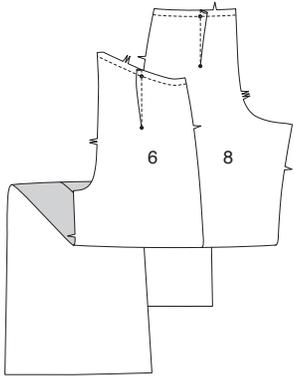


14. Stitch front to back at inner leg seams.

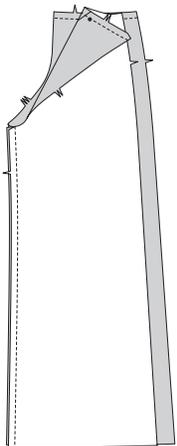


15. With right sides together, pin center seam, matching inner leg seams and notches. Stitch from large dot at upper front edge to back notch, backstitching at notch. To reinforce the seam, stitch again over previous stitching between the notches.




16. Apply pockets to side edges of pants front and pants back as follows: With right sides together, pin POCKET (7) to pants, matching notches, having raw edges even. Stitch in 3/8" (1cm) seam. Press seams toward pockets, pressing pockets out.

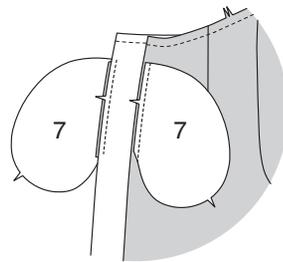

17. Pin pants front to pants back at side seams, matching large dots. Stitch side seams, leaving an opening between large dots. Stitch pocket edges together between the side seams. Clip pants back seam allowance above and below pocket. Press seam open above and below clips. Press pockets toward pant front.

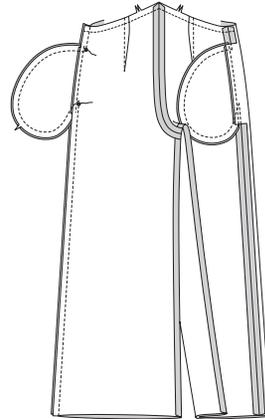

18. With right sides together and raw edges even, pin lower edge of bodice to upper edge of pants, matching seams, large dots, and notches. Stitch. Press, pressing seam toward pants. Insert invisible zipper into center back edges, following manufacturer's directions, stitching remainder of seam connecting to previous stitching. Tack free end of zipper to seam allowance.

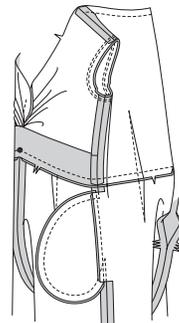


Neck Facing

19. Stitch NECK BINDING (4) sections together along the center front from lower edge to large dot, back-stitching at dot to reinforce the seam. Clip to stitching at large dot, as shown. Trim seam. Press under 1/4" (6mm) on long unnotched edge.




20. Open out center back opening edges of jumpsuit, rolling the zipper teeth away from the opening edge. On outside, pin neck binding to neck edge, matching centers, large dots, and notches, placing small dot at shoulder seams. Stitch from back edge to large dot, breaking stitching at the large dot. Trim seam.


Pin back opening edges together. Using an adjustable zipper foot, stitch 1/2" (1.3cm) from back edges, keeping zipper teeth free. Trim corners. Do not trim center back edges.

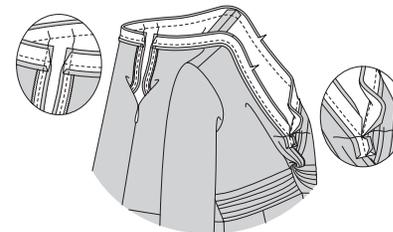

21. **UNDERSTITCH** the binding. Turn binding and back edges to **INSIDE**, rolling zipper teeth back in place; press. Baste close to inner pressed edge of binding. On outside, top-stitch as basted.

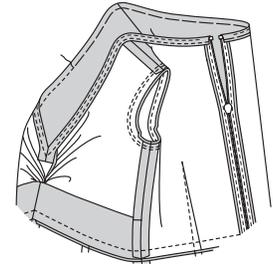


22. Sew hook and eye to back opening edges.



Finishing

23. Mark length. Press up hem along marking. Press under raw edge 1/4" (6mm). Stitch hem in place close to inner pressed edge.





Congrats!

You've completed your sewing adventure!

**SHARE
YOUR** look!



Post your pattern and tag us at
@knowmepatterns and use #knowmepatterns
for a chance to be featured on our social media!

Look for more Know Me PDF patterns at [SomethingDelightful.com/know-me/](https://www.somethingdelightful.com/know-me/)

 1-800-255-2762

© 2022 KnowMe® an IG Design Group Americas, Inc. brand. | All Rights Reserved.
Sold for individual home use only and not for commercial or manufacturing purposes.