



JULIAN CREATES
knowME
BY mimi g

ME2059

BIN #23



B



A

Scan QR code for a Sew-Along video tutorial.



@juliancreates



Designed and printed in USA

Average

MEN'S COAT

Suggested Fabrics: Cotton Blends, Linen Blends, Tweed, Twill, Wool Blends.
Lining: Polyester Blends, Cotton Blends. **Interfacing:** Lightweight Fusible.

Notions: **A:** Ten ¾" (2cm) buttons. **B:** One 37" (94cm) two-way separating jacket zipper (adjust to fit), two ¾" (2cm) buttons.

Sizes	38	40	42	44	46	48	50	52	54	56
-------	----	----	----	----	----	----	----	----	----	----

BODY MEASUREMENTS: Select pattern size based on body measurements											
Chest	38	40	42	44	46	48	50	52	54	56	Ins.
Waist	28	30	36	39	42	44	46	48	50	52	"
Hip	39	41	43	45	47	49	51	53	55	57	"

Lining A,B	45"***	2%	2%	2%	2%	2%	3	3¼	3¼	3¼	3¼	Yds.
Interfacing A,B	20"	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	2	"
Coat A	45"***	3¾	3¾	3¾	3¾	3¾	4¼	4¾	4¾	4¾	4¾	Yds.
	60"***	3¾	3¾	3¾	3¾	3¾	3¾	3¾	3¾	3¾	3¾	"
Coat B	45"***	3¾	3¾	3¾	3¾	3¾	4¼	4¼	4¾	4¾	4¾	Yds.
	60"***	3	3¾	3¾	3¾	3¾	3¾	3¾	3¾	3¾	3¾	"

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B Chest	43	45	47	49	51	53	55	57	59	61	Ins.
A,B Waist	39½	41½	43½	45½	47½	49½	51½	53½	55½	57½	"
A,B Hip	46½	48½	50½	52½	54½	56½	58½	60½	62½	64½	"
Width, lower edge											
Coat A,B	48	50	52	54	56	58	60	62	64	66	Ins.
Finished back length from base of neck											
Coat A,B	35¾	36	36¼	36½	36¾	37	37¼	37½	37¾	38	Ins.

*with nap **without nap

Moins Facile

MANTEAU POUR HOMMES

Tissus Conseillés: Cottonnades, Lins mélangés, Tweed, Twill, Mélanges de laine. **Doublure:** Tissus mélangés de polyester, Cottonnades. **Entoilage:** thermocollant léger.

Mercerie: **A:** 10 boutons de 2cm. **B:** 1 fermeture à glissière séparable dans le 2 sens pour veste de 9 cm (à ajuster), 2 boutons de 2 cm.

Tailles	38	40	42	44	46	48	50	52	54	56
---------	----	----	----	----	----	----	----	----	----	----

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps											
Poitrine	97	102	107	112	117	122	127	132	137	142	cm
Taille	82	87	92	99	107	112	117	122	127	132	"
Hanches (23cm au-dessous de la taille)	99	104	109	115	119	124	128	135	140	145	cm

Doublure A,B	115cm**	2.6	2.6	2.6	2.6	2.6	2.7	3.0	3.0	3.0	3.0	m
Entoilage A,B	51cm	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.7	m
Manteau A	115cm*	3.4	3.4	3.4	3.5	3.5	3.9	4.0	4.0	4.1	4.2	m
	150cm*	2.7	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	3.0	"
Manteau B	115cm*	3.4	3.4	3.4	3.5	3.5	3.9	3.9	4.0	4.0	4.1	m
	150cm*	2.7	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	3.0	"

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B Poitrine	109	114	119	124	130	135	140	145	150	155	cm
A,B Taille	100	105	110	116	121	126	131	136	141	146	"
A,B Hanches	118	123	128	133	138	144	149	154	159	164	"
Largeur à l'ourlet											
Manteau A,B	122	127	132	137	142	147	152	157	163	168	cm
Longueur finie – dos, votre nuque à l'ourlet											
Manteau A,B	91	91	92	93	93	94	95	95	96	97	cm

*avec sens **sans sens



A




B




A B



@juliancreates

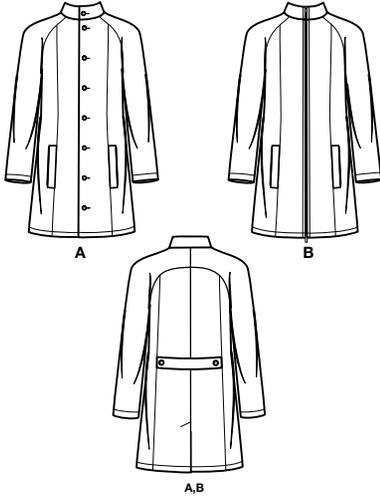

18 PATTERN PIECES

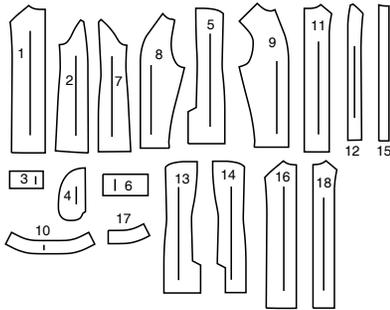

- 1 FRONT-A
- 2 SIDE FRONT-A,B
- 3 WELT-A,B
- 4 POCKET-A,B
- 5 BACK-A,B
- 6 TAB-A,B
- 7 SIDE BACK-A,B
- 8 YOKE AND SLEEVE FRONT-A,B
- 9 YOKE AND SLEEVE BACK-A,B
- 10 COLLAR-A
- 11 FRONT FACING-A
- 12 FRONT LINING-A,B
- 13 RIGHT BACK LINING-A,B
- 14 LEFT BACK LINING-A,B
- 15 BUTTONHOLE GUIDE-A
- 16 FRONT-B
- 17 COLLAR-B
- 18 FRONT FACING-B

PATTERN MARKINGS

- GRAINLINE:** Place on straight grain of fabric, parallel to selvage or fold.
- FOLDLINE:** Place line on fold of fabric.
- BUTTONHOLE MARKING:** Indicates exact length and placement of buttonholes.
- BUTTON MARKING:** Indicates button placement.
- NOTCHES AND SYMBOLS:** For matching seams and construction details.
- Indicates the Bustline, Waistline, Hip and/or Biceps. Measurements refer to circumference of Finished Garment (Body Measurement + Wearing Ease + Design Ease). Adjust pattern if necessary. The measurement excludes pleats, tucks, darts and seam allowances.
- SEAM ALLOWANCE:** 5/8" (1.5cm) included unless otherwise indicated, but not printed on tissue.

ADJUST IF NECESSARY

- Lengthen or Shorten at adjustment lines (==) or where indicated on pattern. If substantial length is added, you may need to purchase additional fabric.
 - TO SHORTEN:** Crease along adjustment line. Make a fold half the amount needed. Tape in place.
 - TO LENGTHEN:** Slash between adjustment lines. Spread amount as needed, keeping edges parallel. Tape over paper.
- When Alteration lines are not on tissue, lengthen or shorten at lower edge.

CUTTING AND MARKING


- SHRINK FABRIC** if not labeled pre-shrunk. Press.
- CIRCLE LAYOUT** for View, Size, Fabric Width.
- Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.
- For **DOUBLE THICKNESS (WITH FOLD)** - fold fabric with right sides together.
- * DOUBLE THICKNESS (WITHOUT FOLD)** - For fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).
- For **SINGLE THICKNESS** - place fabric right side up. (For Fur Pile fabrics, place pile side down.)
- ★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. For "Cut 1" pieces, cut piece once on single layer of fabric with piece face up on right side of fabric.
- Pattern may have cutting lines for several sizes. Select the proper cutting line or pattern pieces for your size.
- Before **CUTTING** place all pieces on fabric according to layout. Pin. (Layouts show approximate position of pattern pieces; position may vary according to your pattern size.) Cut **ACCURATELY**, cutting notches outward.
- Before removing pattern, **TRANSFER MARKINGS** and lines of construction to Wrong Side of fabric, using the Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be traced.
- NOTE:** Broken-line boxes (a| b| c|) in layouts represent pieces cut by measurements provided.

CUTTING LAYOUTS

COAT A


PIECES 1 2 3 4 5 6 7 8 9 10 11

45" (115CM)
WITH NAP
SIZES 38 40 42 44 46

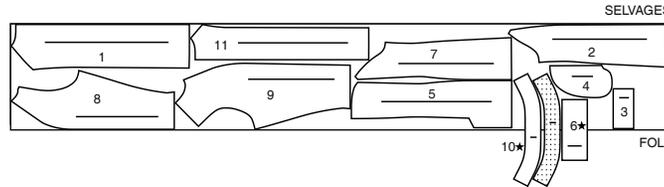

45" (115CM)
WITH NAP
SIZES 48 50 52 54 56


SELVAGES

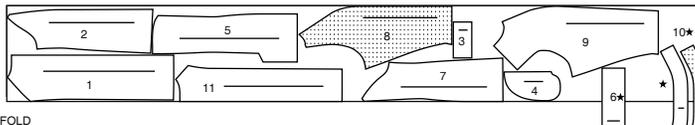

FOLD

60" (150CM)
WITH NAP
ALL SIZES

SELVAGES

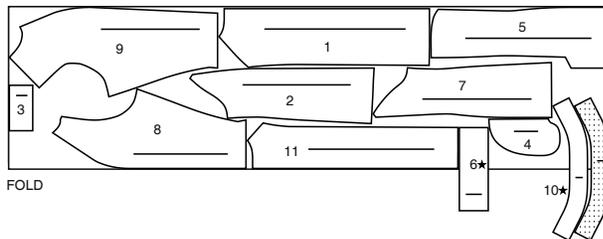


FOLD

RIGHT SIDE OF PATTERN	WRONG SIDE OF PATTERN	RIGHT SIDE OF FABRIC	WRONG SIDE OF FABRIC

INTERFACING A

PIECES 3 6 10 11


20" (51CM)
ALL SIZES

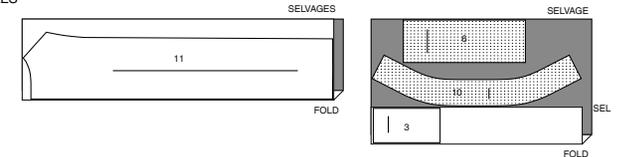


LINING A, B (FRONT, BACK, SIDE FRONT & BACK, SLEEVE FRONT & BACK, POCKET, YOKE)

PIECES 2 4 7 8 9 12 13 14

45" (115CM) WITHOUT NAP
SIZES 38 40 42 44 46 48

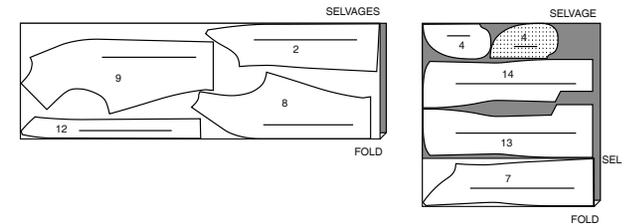


45" (115CM) WITHOUT NAP
SIZES 50 52 54 56

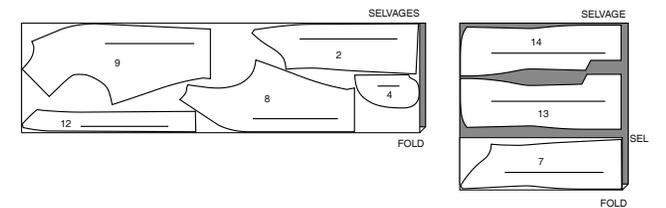


COAT B

PIECES 2 3 4 5 6 7 8 9 16 17 18


45" (115CM) WITH NAP
SIZES 38 40 42 44 46

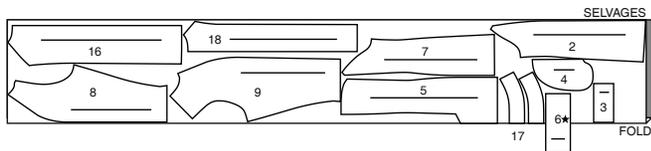

45" (115CM) WITH NAP
SIZES 48 50 52 54 56

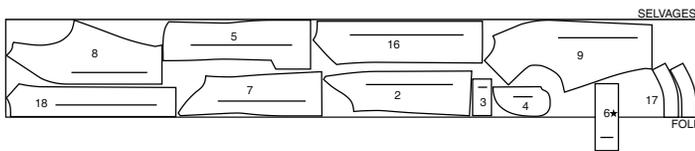



60" (150CM) WITH NAP
ALL SIZES

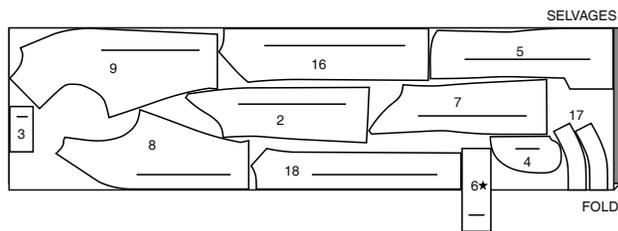

INTERFACING B (FRONT FACING, WELT, COLLAR)


PIECES 3 6 17 18

20" (51CM)
ALL SIZES

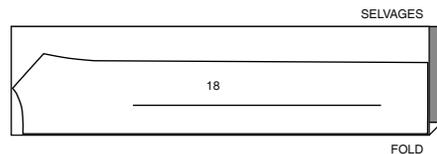


SEWING INFORMATION

FABRIC KEY

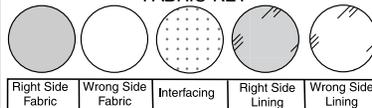

SEAM ALLOWANCES

Use 5/8" (1.5cm) seam allowances unless otherwise indicated.



PIN AND FIT

Pin or baste seams, **RIGHT SIDE TOGETHER**, matching notches. Fit garment before stitching major seams.

PRESS

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.

GLOSSARY

Sewing terms appearing in **BOLD TYPE** in Sewing Instructions are explained below.

REINFORCE – Stitch along seamline where indicated in sewing instructions, using small machine stitches.

SLIPSTITCH – Slide needle through a folded edge, then pick up a thread of underneath fabric.

STAYSTITCH – Stitch 1/8" (3mm) from seamline in seam allowance (usually 1/2" (13mm) from raw edge).

UNDERSTITCH – Open out facing or underside of garment; stitch to seam allowance close to seam.



@juliancreates

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.


STITCH 5/8" (1.5CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

SEWING DIRECTIONS

COAT A, B


INTERFACING

1. Pin Interfacing to wrong side of WELT (3) and TAB (6), also for View A – COLLAR (10) and FRONT FACING (11), or for View B – COLLAR (17) and FRONT FACING (18) sections. Fuse interfacing in place, following manufacturer's instructions.

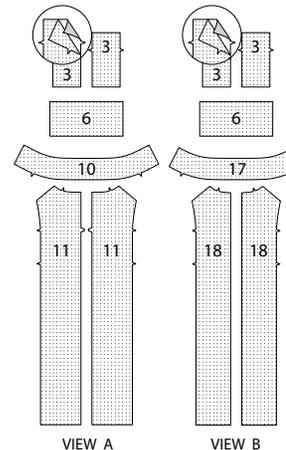


VIEW A VIEW B
FRONT AND WELT


2. **STAYSTITCH** neck edge of FRONT (1) for View A, or FRONT (16) for View B. To **REINFORCE** side front edge at large dots, stitch along seam line for about 1" (2.5cm) each side of large dots, stitching through dots, as shown.

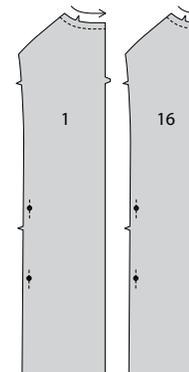


3. Fold WELT (3) along foldline with right sides together. Stitch ends. Trim seams; clip corners.




4. Turn welt; press. Baste raw edges together. On outside, pin welt to front, matching large dots. Baste.



5. With right sides together, pin POCKET (4) lining to front (over welt), matching large dots. Stitch between the large dots, backstitching to reinforce. Clip seam allowance to stitching at dots.



6. **UNDERSTITCH** the pocket. Turn pocket to inside, turning out seam allowances above and below clips; press.




7. With right sides together, pin fabric pocket to pocket lining, matching large dots and having raw edges even. Stitch pockets together between the large dots.




8. On outside, baste raw edges of front and pocket together.



9. With right sides together and raw edges even, pin front to SIDE FRONT (2), matching large dots and notches. Stitch, being careful not to catch in finished edge of pocket or welt. Press seam open.

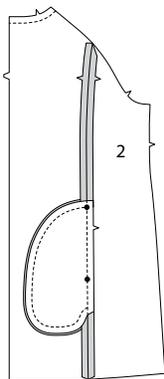


10. On outside, press welt toward side front. Stitch close to ends of welt, or if you prefer, invisibly SLIPSTITCH ends to side front.

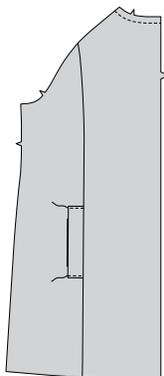


BACK AND TAB


11. To REINFORCE inner corner of BACK (5) vent extensions, stitching along stitching lines, pivoting with needle in fabric at large dot. Clip to stitching at dot. Stitch center back seam from upper edge to large dot, back-stitching at dot to reinforce the seam.

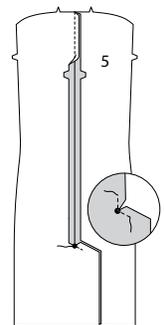


12. Fold TAB (6) in half lengthwise with right sides together. Stitch long edge.



13. Turn tab; press. Baste raw edges together. On outside, pin tab to back, matching small and large dots. Baste.




14. With right sides together and raw edges even, pin back to SIDE BACK (7) along side back edges, matching small dots. Stitch. Stitch side back to side front at side edges.

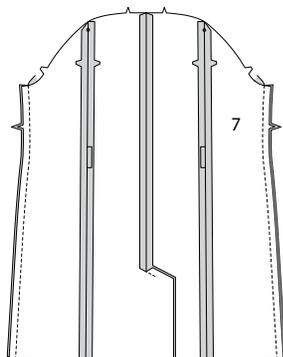


YOKE AND SLEEVE

15. Pin YOKE AND SLEEVE FRONT (8) to YOKE AND SLEEVE BACK (9) at shoulder and underarm edges, matching notches. Stitch. STAYSTITCH neck edge of yoke and sleeve.

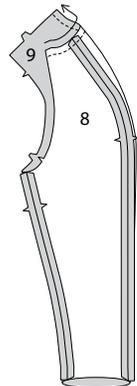


16. Stitch center back edges of yoke and sleeve sections. Turn sleeves right side out. Hold coat wrong side out with armholes toward you. With right sides together, pin sleeves to armhole edges, matching underarm seams, notches, and center seams of yoke and back. Stitch. Stitch again 1/8" (3mm) from first stitching. Trim seam between underarm notches close to stitching. Press seam toward yoke and sleeve, pressing yoke out.

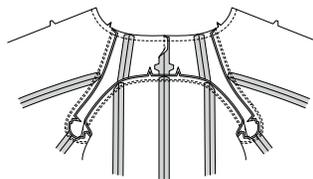


COLLAR A

17. Clip neck edge of coat to staystitching. With right sides together and raw edges even, pin COLLAR (10) to neck edge, matching centers, small dots, and notches, placing inner small dot at shoulder seam. Stitch. Press seam open, pressing collar out.

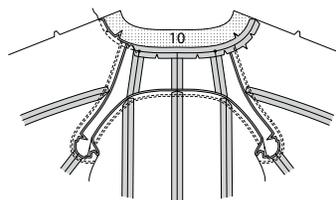

COLLAR B


18. Clip neck edge of coat to staystitching. With right sides together and raw edges even, pin COLLAR (17) to neck edge, matching centers and notches, placing inner small dot at shoulder seam. Stitch. Press seam open, pressing collar out.

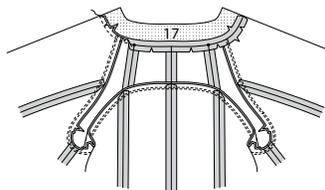


LINING A, B

NOTE: Trim 1" (2.5cm) from lower edge of SIDE FRONT (2), SIDE BACK (7), YOKE AND SLEEVE FRONT (8), and YOKE AND SLEEVE BACK (9) lining sections before stitching.


19. REINFORCE inner corner of RIGHT BACK LINING (13) at large dot and inner corner of LEFT BACK LINING (14) at small dot, by stitching along stitching lines and pivoting with needle in fabric at the dots. Clip to dots. Stitch center back edges of back lining sections from upper edge to the large dot, back-stitching at dot to reinforce the seam.

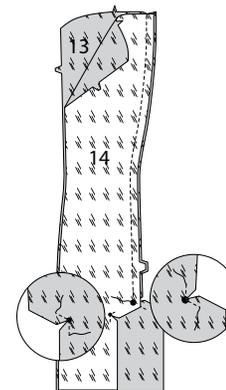


20. To make pleat in back lining, on inside, bring broken lines together. Stitch along broken lines to small dot. Press pleat toward right side. Baste across upper edge.




21. Stitch back lining to SIDE BACK (7) lining at side back edges. Stitch side back lining to SIDE FRONT (2) lining at side edges. Stitch side front lining to FRONT LINING (12) at side front edges.

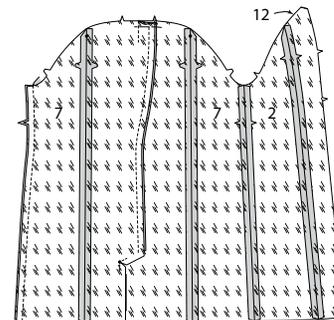


22. STAYSTITCH neck edge of FRONT FACING (11) for View A, or FRONT FACING (18) for View B. REINFORCE inner lower edge of facing at the small dot, stitching 1" (2.5cm) above and below the dot. Clip to stitching at small dot.

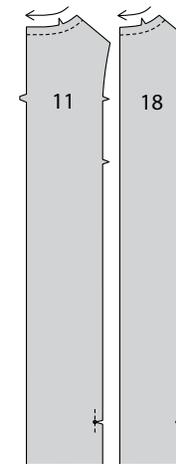

23. Pin front facing to front lining, matching small dots and notches. Stitch from armhole edge to small dot, back-stitching at dot to reinforce the seam. Press seam toward lining above clip.

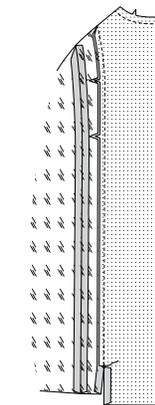


24. Stitch yoke and sleeve lining sections to jacket lining and facing, stay-stitch neck edge, and stitch collar facing sections to neck edge in the same manner as for jacket.

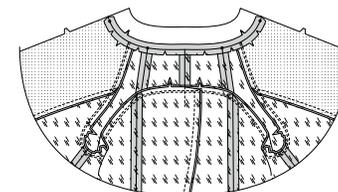


CONTINUE AS FOLLOWS FOR VIEW A

25. With right sides together and raw edges even, pin facing and lining to jacket, matching centers. Stitch upper edge of collar, front, and lower edges to inner edge of facing. Trim seams and corners.

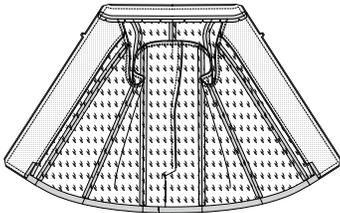


26. UNDERSTITCH upper edge of collar and front edges, as far as possible. Lift up facing and lining; sew back neck seams together.




CONTINUE AS FOLLOWS FOR VIEW B

NOTE: It may be necessary to shorten length of zipper.


27. Press under 5/8" (1.5cm) seam allowance on front edge of jacket. Press under 3/4" (2cm) on front edge of front facing. Trim to 3/8" (1cm). With right sides together and raw edges even, pin facing and lining to jacket, matching centers. Stitch upper edge of collar and lower edges to inner edge of facing, keeping front edges open. Trim seam.

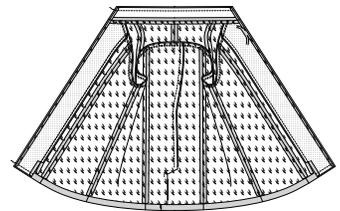


28. UNDERSTITCH upper edge of collar as far as possible. Lift up facing and lining; sew back neck seams together. Turn jacket; press.




29. Always shorten a separating zipper from the top. Place closed zipper along front edge of jacket with bottom zipper stop at lower large dot. Mark placement of new top stop at upper large dot.

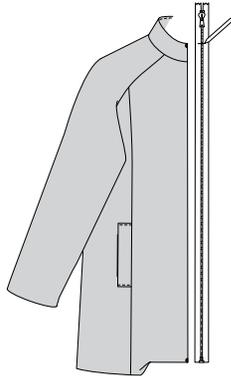

30. Open zipper from the top, bringing slider well below the mark. Using pliers or a wire cutter, remove teeth above mark for 1" (2.5cm). Any excess zipper above this can be trimmed away.



31. Create a new top stop, by making several whipstitches over tape at marking, or by bending a straight metal eye with pliers and sewing securely to each tape at new marking, or by purchasing a zipper repair kit and installing the stop using pliers. Make sure the new top stop is large enough to prevent the slider from passing. Turn under zipper tape above top stop with inner edge away from teeth.

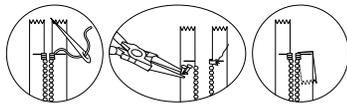

32. On outside, align jacket front sections, matching collar seams. Pin closed zipper between opening edges of jacket and lining with top stop at upper large dot and lower stop at lower large dot, having front edges meet at center of zipper and lining edges 1/4" (6mm) away. Hand-baste close to raw edge of zipper tape. Separate the zipper.




33. On outside, stitch a generous 1/4" (6mm) each side of center, using an adjustable zipper foot. Remove basting.




CONTINUE AS FOLLOWS FOR BOTH VIEWS


34. With right sides together, pin the back vent edges of right back lining and right coat back, matching small and large dots. Starting at large dot, stitch right back vent edges together to within 2" (5cm) of lower edge, being careful not to catch in left half of coat and lining.

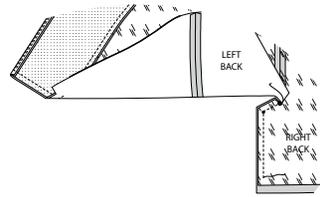


35. With right sides together, pin the back vent edges of left back lining and left coat back, matching small and large dots. Starting at large dot, stitch left back vent edges together to within 2" (5cm) of lower edge, being careful not to catch in right half of coat and lining.

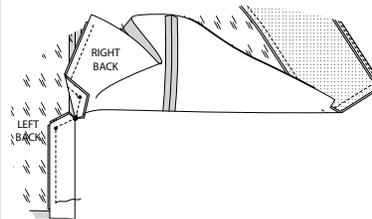


36. With right sides together, pin lower edges of coat and lining together, matching centers back and seams. Stitch lower edges together between front seams in 1/2" (1.3cm) seam, leaving an opening in one lower edge for turning.




37. At back vent edges, turn up coat hem over lining (lining hem will turn up with the coat), as shown. Stitch remaining right back vent edges together, connecting to previous stitching. Trim seams and corners.




38. Turn coat right side out through opening in lining. On inside, pin right vent over left, matching small dots, placing pins on outside. On outside, stitch left back along stitching line, catching in right vent on the inside. Slip sleeves in place. To match seams correctly, turn seam allowance on sleeve edges of coat and lining toward each other at seams, as shown. Anchor the turned edges with a pin. (This will enable you to pin the lower edges together more easily when you are ready to stitch the sleeve edges together.)

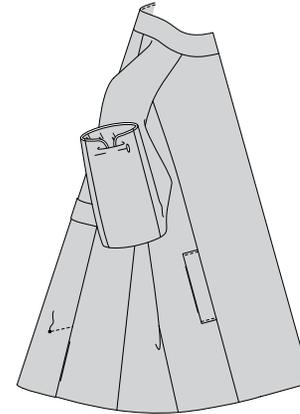


39. Pull sleeve through opening in lower edge of lining, having wrong sides out, separating the jacket sleeve from the lining sleeve. With right sides together, pin sleeve edges together, matching seams. Remove anchoring pin. Stitch sleeve edge. Trim seam.

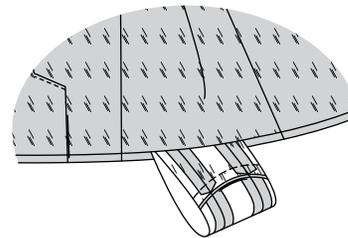

40. Turn sleeve right side out; press, pressing up sleeve hem. Allow sleeve lining to drop. (If you prefer, slip hand through opening in lower edges of coat. Tack shoulder and armhole seams of jacket and lining together loosely.) On inside, pin dropped lining up away from lower edge of sleeve. On outside, topstitch 7/8" (2.2cm) from lower edge of sleeve.




41. Allow coat lining to drop. Press. Press under 1/2" (1.3cm) on opening edge of lining. **SLIPSTITCH** pressed edge of lining 1" (2.5cm) above lower edge of coat. On inside, pin dropped lining up away from lower edge of jacket, placing pins on outside. On outside, topstitch 7/8" (2.2cm) from lower edge of jacket, breaking stitching at vent, and between zipper stitching for View B.

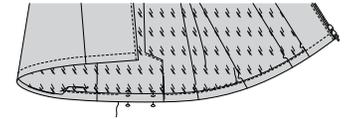


FINISHING

42. Sew buttons to back tab at small dots.

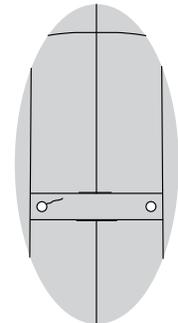

43. FOR VIEW A - To mark buttonholes in left front, place **BUTTONHOLE GUIDE** (15) along finished edge of coat, matching centers. Transfer markings. Make buttonholes at markings. Lap left front over right, matching centers. Sew buttons under buttonholes. Make buttonhole at marking on left collar. Sew button to right collar under buttonhole.

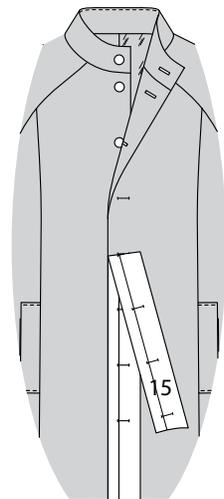



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
@simplicity_creative_group and **#knowMepatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at **simplicity.com**

Have a question or need help with your sewing project call us at
1-800-782-0323

