



Easy

Facile

MEN'S TOPS

Suggested Fabrics: Chambray, Cotton Blends, Double Knit, Mesh, Sweatshirt Fleece, Terry Knit.

Notions: A,B: One strip of 7" x 38" (18cm x 97cm) rib knit trim.

Sizes	34	36	38	40	42	44	46	48	50	52
-------	----	----	----	----	----	----	----	----	----	----

BODY MEASUREMENTS: Select pattern size based on body measurements

	34	36	38	40	42	44	46	48	50	52	Ins.
Chest	34	36	38	40	42	44	46	48	50	52	Ins.
Waist	28	30	32	34	36	39	42	44	46	48	"
Hip	35	37	39	41	43	45	47	49	51	53	"

Contrast A, B Contrast 2 (Neckband) - Strip of 7" x 38" rib knit trim

Top A	45**	2	2	2¼	2¼	2¼	2¾	2¾	2¾	2¾	2¾	Yds.
60**	1¾	1¾	1½	1½	1½	1½	1½	1½	1½	1½	1¾	"

Top B	45**	1½	1½	1½	1½	1¼	1¼	1¼	1¼	1¼	1¼	Yds.
60**	¾	¾	¾	¾	¾	¾	1¼	1¼	1¼	1¼	1¼	"

Contrast 1 (Yoke Front and Back, Sleeves)

	45**	1	1	1¼	1¼	1¼	1¼	1¼	1¼	1¼	1¼	Yds.
60**	¾	¾	¾	¾	¾	1	1	1	1	1¾	1¾	"

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B Chest	44	46	48	50	52	54	56	58	60	62	Ins.
-----------	----	----	----	----	----	----	----	----	----	----	------

A,B Waist	44	46	48	50	52	54	56	58	60	62	"
-----------	----	----	----	----	----	----	----	----	----	----	---

Width, lower edge

Top A,B	44	46	48	50	52	54	56	58	60	62	Ins.
---------	----	----	----	----	----	----	----	----	----	----	------

Finished back length from base of neck

Top A,B	22¼	22½	22¾	23	23¼	23½	23¾	24	24¼	24½	Ins.
---------	-----	-----	-----	----	-----	-----	-----	----	-----	-----	------

*with nap **without nap

HAUTS POUR HOMMES

Tissus Conseillés: Chambray, Cotonnades, Tricot double, Maille, Jersey molletonné pour sweat-shirt, Tricot éponge.

Mercerie: A,B: 1 bande de 18cm x 97cm de galon de tricot à côtes.

Tailles	34	36	38	40	42	44	46	48	50	52
---------	----	----	----	----	----	----	----	----	----	----

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	87	92	97	102	107	112	117	122	127	132	cm
----------	----	----	----	-----	-----	-----	-----	-----	-----	-----	----

Taille	71	76	82	87	92	99	107	112	117	122	"
--------	----	----	----	----	----	----	-----	-----	-----	-----	---

Hanches (23cm au-dessous de la taille)

	89	94	99	104	109	115	119	124	128	135	cm
--	----	----	----	-----	-----	-----	-----	-----	-----	-----	----

Contraste A, B Contraste 2 (Bande d'encolure) - 18cm x 97cm de galon de tricot à côtes

Haut A	115cm*	1.8	1.8	2.1	2.1	2.1	2.1	2.2	2.2	2.2	2.2	m
150cm*	1.8	1.8	2.1	2.1	2.1	2.1	2.2	2.2	2.2	2.2	2.2	"

Haut B	115cm*	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.1	1.1	1.1	m
150cm*	0.7	0.7	0.7	0.7	0.7	0.7	1.1	1.1	1.1	1.1	1.1	"

Contraste 1 (Empiècement devant et dos, Manches)

	115cm*	0.9	0.9	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.3	m
150cm*	0.7	0.7	0.7	0.8	0.8	0.9	0.9	0.9	1.0	1.0	1.0	"

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B Poitrine	112	117	122	127	132	137	142	147	152	157	cm
--------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----

A,B Taille	112	117	122	127	132	137	142	147	152	157	"
------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

Largeur à l'ourlet

Haut A,B	112	117	122	127	132	137	142	147	152	157	cm
----------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----

Longueur finie – dos, votre nuque à l'ourlet

Haut A,B	57	57	58	58	59	60	60	61	62	62	cm
----------	----	----	----	----	----	----	----	----	----	----	----


*avec sens **sans sens



A





B




SCAN QR CODE
FOR A
STEP-BY-STEP
VIDEO TUTORIAL

@norrisdantaford

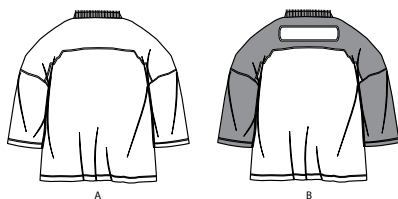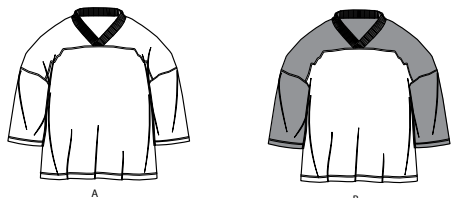


7 PATTERN PIECES

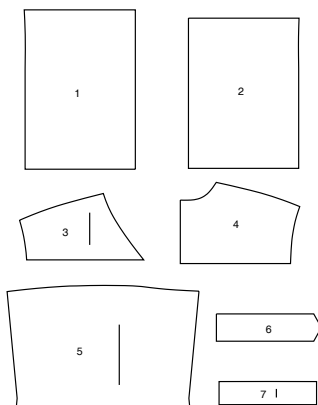

- 1 FRONT - A,B
- 2 BACK - A,B
- 3 YOKE FRONT - A,B
- 4 YOKE BACK - A,B
- 5 SLEEVE - A,B
- 6 NECKBAND - A,B
- 7 PATCH - B

PATTERN MARKINGS



GRAINLINE: Place on straight grain of fabric, parallel to selvage or fold.
FOLDLINE: Place line on fold of fabric.
BUTTONHOLE MARKING: Indicates exact length and placement of buttonholes.
BUTTON MARKING: Indicates button placement.
NOTCHES AND SYMBOLS: For matching seams and construction details.
 Indicates the Bustline, Waistline, Hip and/or Biceps. Measurements refer to circumference of Finished Garment (Body Measurement + Wearing Ease + Design Ease). Adjust pattern if necessary. The measurement excludes pleats, tucks, darts and seam allowances.
SEAM ALLOWANCE: 5/8" (1.5cm) included unless otherwise indicated, but not printed on tissue.

ADJUST IF NECESSARY

Lengthen or Shorten at adjustment lines (==) or where indicated on pattern. If substantial length is added, you may need to purchase additional fabric.
TO SHORTEN: Crease along adjustment line. Make a fold half the amount needed. Tape in place.
TO LENGTHEN: Slash between adjustment lines. Spread amount as needed, keeping edges parallel. Tape over paper.
 When Alteration lines are not on tissue, lengthen or shorten at lower edge.


CUTTING AND MARKING

SHRINK FABRIC if not labeled pre-shrunk. Press.
CIRCLE LAYOUT for View, Size, Fabric Width.
 Use **WITH NAP** layout for fabrics with one-way designs, nap, pile or surface shading. Because most knits have surface shading, a with nap layout is used.
 For **DOUBLE THICKNESS (WITH FOLD)** - fold fabric with right sides together.
*** DOUBLE THICKNESS (WITHOUT FOLD)** - For fabrics with nap, fold fabric crosswise, right sides together. Mark as shown. Cut along crosswise fold of fabric (A). Turn upper layer 180° so arrows go in same direction and place over lower layer, right sides together (B).
 For **SINGLE THICKNESS** - place fabric right side up. (For Fur Flee fabrics, place pile side down.)
 ★ Cut other pieces first, allowing enough fabric to cut this piece. Open fabric. For "Cut 1" pieces, cut piece once on single layer of fabric with piece face up on right side of fabric.
 Pattern may have cutting lines for several sizes. Select the proper cutting line or pattern pieces for your size.
 Before **CUTTING** place all pieces on fabric according to layout. Pin. (**Layouts show approximate position of pattern pieces; position may vary according to your pattern size.**) Cut **ACCURATELY**, cutting notches outward.
 Before removing pattern, **TRANSFER MARKINGS** and lines of construction to Wrong Side of fabric, using the Pin and Chalk Pencil method or Tracing Paper and Dressmaker Wheel. Markings needed on right side of fabric should be thread traced.
NOTE: Broken-line boxes (a| b| c|) in layouts represent pieces cut by measurements provided.


CUTTING LAYOUTS

TOP A
PIECES 1 2 3 4 5


45" (115CM)
WITH NAP
ALL SIZES

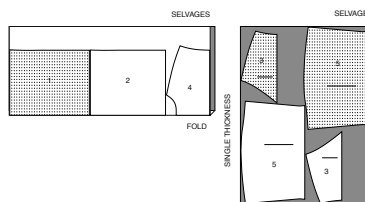

60" (150CM)
WITH NAP
SIZES 34 36 38 40 42 44 46 48 50




60" (150CM)
WITH NAP
SIZE 52




TOP B
PIECES 1 2 7

45" (115CM)
WITH NAP
ALL SIZES




60" (150CM)
WITH NAP
SIZES 34 36 38 40 42 44



CUT ONE OF PIECE 7


RIGHT SIDE OF PATTERN	WRONG SIDE OF PATTERN	RIGHT SIDE OF FABRIC	WRONG SIDE OF FABRIC
-----------------------	-----------------------	----------------------	----------------------

60" (150CM)
WITH NAP
SIZES 46 48 50 52




CONTRAST 1 (YOKE FRONT AND BACK, SLEEVES)
PIECES 3 4 5


45" (115CM)
WITH NAP
ALL SIZES



60" (150CM)
WITH NAP
SIZES 34 36 38 40 42




60" (150CM)
WITH NAP
SIZES 44 46 48 50 52




SEWING INFORMATION

FABRIC KEY



SEAM ALLOWANCES

Use 5/8" (1.5cm) seam allowances unless otherwise indicated.




PIN AND FIT

Pin or baste seams, **RIGHT SIDE TOGETHER**, matching notches. Fit garment before stitching major seams.

PRESS

Press seam allowances flat; then open unless otherwise stated. Clip where necessary so they lie flat.



SCAN QR CODE FOR A STEP-BY-STEP VIDEO TUTORIAL


@norrisdantaford

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH 5/8" (1.5CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.


TOP A, B

1. Stitch **YOKE FRONT** (3) sections to **YOKE BACK** (4) at shoulders.

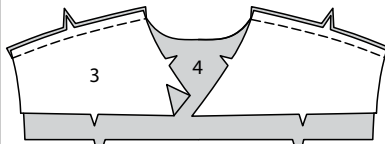

VIEW B:


2. Stitch **PATCH** (7) along 3/8" (1cm) seam line on raw edges.



3. Turn outer edges of patch under along stitching and press.




4. On **OUTSIDE**, pin patch to yoke back within placement line. Edgestitch close to outer edges of patch.




VIEW A, B:


5. Open out rib knit section if necessary. Fold strip in half lengthwise. Pin **NECKBAND** (6) to rib knit strip placing center back fold on pattern piece on folded edge of trim, placing center of band along horizontal foldline on strip. Cut out neckband and transfer markings. Fold neckband in half lengthwise, with wrong sides together, matching centers back, small, and large dots. Press. Pin.




6. With **RIGHT** sides together and raw edges even, pin neckband to neck edge, matching centers back and large dots, placing small dots at shoulder seams. Stitch, stretching band to fit. Stitch again 1/4" (6mm) away from first stitching within seam allowance. Trim close to second stitching.




7. Press band seam toward top, pressing band out.




8. On **OUTSIDE**, topstitch yoke 1/4" (6mm) from neck seam.




9. Lap **LEFT** yoke front over **RIGHT**, matching large dots and having raw edges even. Baste across lower edges.




10. Stitch **FRONT** (1) to lower edge of yoke front, matching large dots. Press seam down.

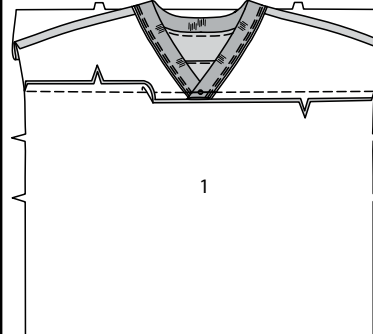


11. On **OUTSIDE**, topstitch upper edge of front 1/4" (6mm) from yoke seam.




12. Stitch **BACK** (2) to lower edge of yoke back, matching centers back. Press seam down.

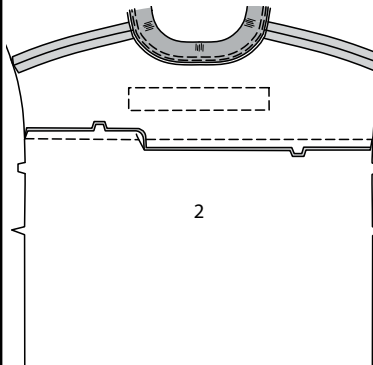


13. On **OUTSIDE**, topstitch upper edge of back 1/4" (6mm) from yoke seam.




14. With **RIGHT** sides together and raw edges even, pin **SLEEVE** (5) to armhole, place center small dot at shoulder seam, matching notches and remaining small dots. Stitch between outer small dots, back-stitching at outer small dots to reinforce seam. Press seam toward sleeve.

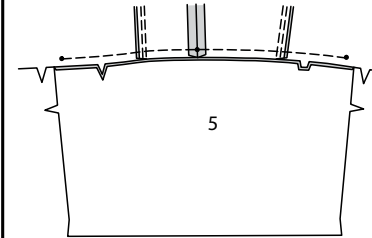



15. On **OUTSIDE**, topstitch armhole edge of sleeve 1/4" (6mm) from seam between small dots.

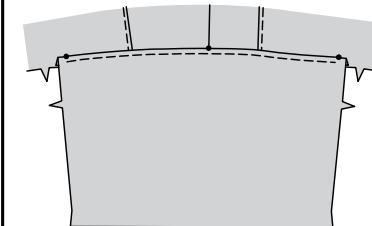


16. Pin front to back at sides, matching small dots. Stitch side seam below small dot, being careful not to catch in sleeve or sleeve seam allowances, back-stitching at small dot to reinforce.




17. Turn side seam allowances away from lower edge of armhole and pin underarm seam. Stitch underarm seam from small dot to end of sleeve, as shown, being careful not to catch in side seam allowances. **TIP:** To make it easier to stitch seam below topstitching, use an adjustable zipper foot when stitching close to armhole.

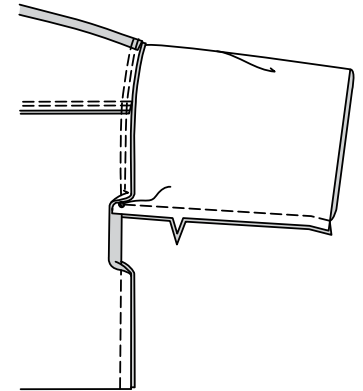

18. FOR KNITS FABRICS - Press up 1-1/4" (3.2cm) hem on lower edge of sleeve. Stitch 1/4" (6mm) from inner raw edge. Stitch again 1/4" (6mm) below first stitching. Hem lower edge of top in same manner.



19. FOR WOVEN FABRICS - Press up 1-1/4" (3.2cm) hem on lower edge of sleeve. Press under 1/4" (6mm) on inner raw edge. Stitch close to inner pressed edge. Stitch again 1/4" (6mm) below first stitching. Hem lower edge of top in same manner.





Congrats!

You've completed your sewing adventure

SHARE YOUR LOOK



Post your pattern and tag us
[@simplicity_creative_group](#) and [#knowMepatterns](#)
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-800-782-0323

