
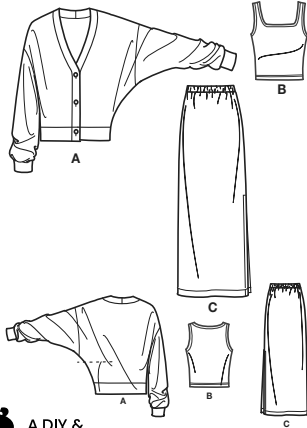



Simplicity®

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.



miG A DIY & LIFESTYLE BRAND

14 PIECES

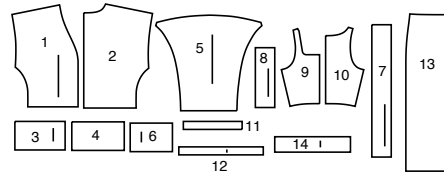

- 1 Front-A
- 2 Back-A
- 3 Front Band-A
- 4 Back Band-A
- 5 Sleeve-A
- 6 Sleeve Band-A
- 7 Front and Back Band-A
- 8 Band Interfacing-A
- 9 Front-B
- 10 Back-B
- 11 Neckband-B
- 12 Armhole Band-B
- 13 Front and Back-C
- 14 Casing-C

General Directions

The Pattern

- SYMBOLS**
- ↔ GRAIN LINE Place on straight grain of fabric parallel to selvage
 - ⇄ PLACE SOLID LINE on fold of fabric.
 - - - - - CENTER FRONT OR BACK of garment.
 - ∇ NOTCHES
 - ○ DOTS
 - CUTTING LINE
 - == LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
Make adjustments before placing pattern on fabric.

TO LENGTHEN:
Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

TO SHORTEN:
At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING:
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.

PIN pattern to fabric as shown in Cutting Layouts.

• FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.


• FOR SINGLE THICKNESS: Place fabric RIGHT side up.

• FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING:
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.




Sewing

- SEW garment following **Sewing Directions**.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.




SPECIAL CUTTING NOTES


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).



Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

NOTE: SIZED FOR STRETCH KNIT ONLY


CARDIGAN A

USE PIECES 1 2 3 4 5 6 7

60" (150CM) WITH NAP SIZES 8 10 12 14 16

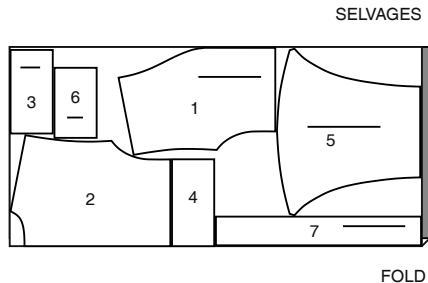

60" (150CM) WITH NAP SIZES 18 20 22 24 26

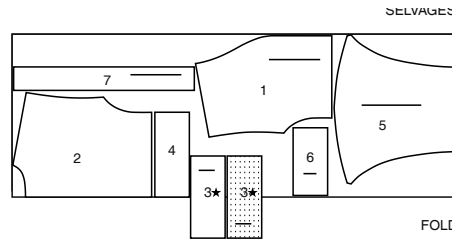

INTERFACING A

USE PIECE 8


20" (51CM) ALL SIZES



TANK TOP B

USE PIECES 9 10 11 12


60" (150CM) WITH NAP ALL SIZES



SKIRT C

USE PIECES 13 14

60" (150CM) WITH NAP ALL SIZES



Sewing Directions

FABRIC KEY

RIGHT SIDE	WRONG SIDE	INTERFACING	LINING	LINING
------------	------------	-------------	--------	--------

Read **General Directions** on page 1 before you begin.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.
STITCH 5/8" (1.5CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

CARDIGAN A










INTERFACING

- To reinforce FRONT AND BACK BAND (7) for buttonholes and buttons, pin BAND INTERFACING (8) to WRONG side of fabric with lower and side edges even. Fuse interfacing in place following manufacturer's directions.

FRONT AND BACK

- Pin FRONT (1) to BACK (2) at shoulder edges, matching notches. Stitch.


- With RIGHT sides together, pin SLEEVE (5) to armhole edge with center small dot at shoulder seam, matching notches. Stitch. Press seam open.

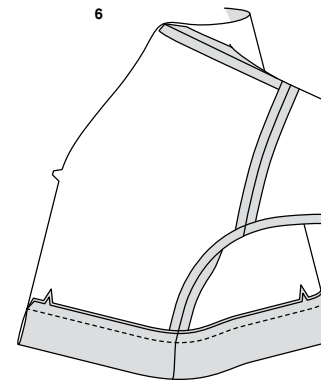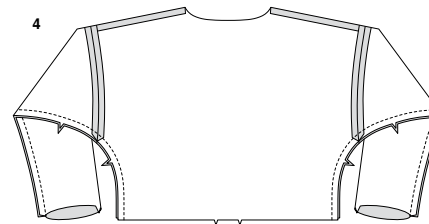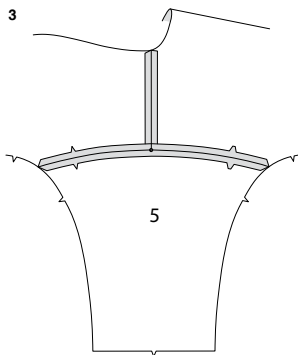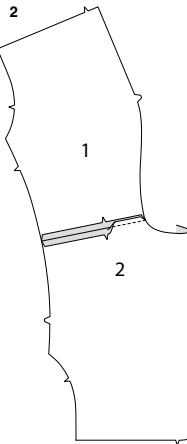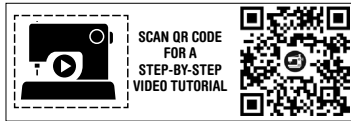


- Stitch front to back at entire underarm seam, matching armhole seams. Press seam open.

BANDS

- Pin FRONT BAND (3) sections to BACK BAND (4) at side edges, matching notches. Stitch. Fold band in half, lengthwise, with WRONG sides together; baste.
- On OUTSIDE, pin band to cardigan, matching centers, seams, and notches. Stitch. Press band out, pressing seam toward cardigan.
- Stitch FRONT AND BACK BAND (7) sections together at center back.
- With RIGHT sides together and raw edges even, pin band to front and neck edge of cardigan, matching centers, notches, and small dots, placing inner small dots at shoulder seams. Stitch, stretching band to fit. Trim seam in layers. Press band out, pressing seam toward band.
- Turn lower edge of band to OUTSIDE, along foldline, matching small dots. Stitch from outer edge to small dots, backstitching at dots to reinforce the seam. Trim seam in layers; clip corner.

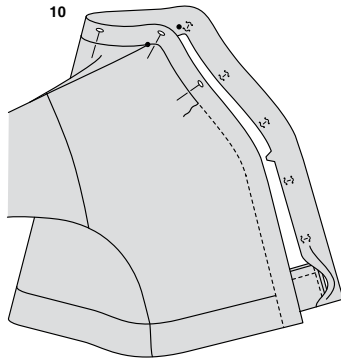


10. Turn band to INSIDE along foldline; press, pressing out corners. Pin raw edge of band facing over seam, matching small dots, placing pins on OUTSIDE. On OUTSIDE, stitch in the ditch of the seam, catching in raw edge of band facing on the INSIDE.



11. With RIGHT sides together, stitch ends of SLEEVE BAND (6) together. Fold sleeve band in half, with WRONG sides together and raw edges even; press. Pin.


12. On OUTSIDE, pin band to lower edge of sleeve with raw edges even, matching seams and notches. Stitch, stretching band to fit. Stitch again 1/4" (6mm) from first stitching within the seam allowance. Press seam toward sleeve, pressing band out.




FINISHING

13. Make buttonholes on RIGHT band at markings. Sew buttons to LEFT band under buttonholes.


TANK TOP B




1. Pin FRONT (9) to BACK (10) at shoulder and side edges. Stitch.




2. Stitch center back edges of NECKBAND (11) in a 3/8" (1cm) seam. Fold band in half, lengthwise, with WRONG sides together; press. Pin.




3. On OUTSIDE, pin band to neck edge, matching centers, placing small dots at shoulder seams, and having raw edges even.




4. Stitch in a 3/8" (1cm) seam, stretching the band to fit. Press seam toward top, pressing band out. On OUTSIDE, straight or zig-zag stitch top close to neck seam. Trim seam close to second stitching.




5. Stitch notched end of ARMHOLE BAND (12) in a 3/8" (1cm) seam. Fold band in half lengthwise, with WRONG sides together, matching small dots; press. Pin.




6. On OUTSIDE, pin band to armhole edge, placing small dot at shoulder seam and matching side seams and notches. Stitch in a 3/8" (1cm) seam, stretching the band to fit. Press seam toward top, pressing band out. On OUTSIDE, straight or zig-zag stitch top close to armhole seam. Trim seam close to second stitching.




7. Press up 1" (2.5cm) hem allowance. Stitch 1/4" (6mm) from raw edge and 1/4" (6mm) below first stitching.

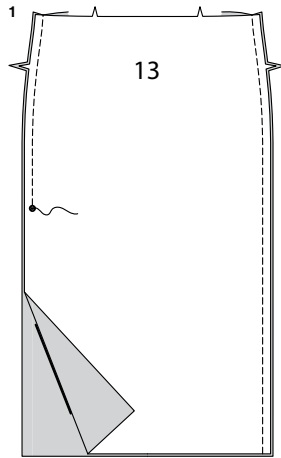


1. Pin SKIRT FRONT AND BACK (13) sections with RIGHT sides together, matching notches. Stitch RIGHT sides edges and LEFT side edges from upper edge to large dot, backstitching at dot to reinforce the seam.




2. With RIGHT sides together, stitch ends of CASING (14), leaving an opening in LEFT side seam between small dots, as shown. Backstitch at small dots to reinforce seam.




3. Press seams open. If you prefer, baste seam allowances in place. Remove basting after elastic is inserted. Fold casing in half, lengthwise, with WRONG sides together, having raw edges even. Baste raw edges together. The side with the opening is the underside of the casing.




4. With the underside of casing facing you, pin casing to skirt matching centers, notches, and side seams. Stitch along seam line. Stitch again 1/4" (6mm) from first stitching within seam allowance. Trim close to second stitching.




5. Press seam toward skirt, pressing casing out.




6. Cut a piece of elastic to fit waist, plus 1" (2.5cm). Insert elastic through opening in casing. Overlap ends and hold with a safety pin. Try on garment and adjust to fit.




7. Stitch ends of elastic together securely.



8. Slipstitch opening edges of casing together. Distribute fullness evenly.
TIP-To secure elastic so it won't twist in wearing, stitch through all thicknesses of casing in the groove of each seam.



9. Press up 1-1/4" (3.2cm) hem allowance on lower edge of skirt. Straight stitch or zig-zag stitch 1/4" (6mm) from raw edge.

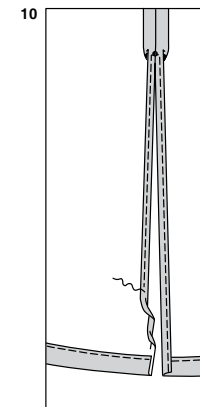

10. Press under 5/8" (1.5cm) on LEFT side opening edges below dot. To form a narrow hem, tuck under raw edge to meet crease; press. Stitch close to inner pressed edge, squaring stitching even with dot.



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
[@simplicity_creative_group](#) and [#simplicitypatterns](#)
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.