


S3035

Simplicity

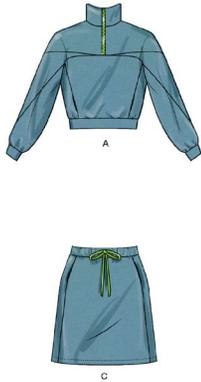

Average

MISSES' KNIT TOPS AND SKIRTS

Suggested Fabrics: Cotton Knits, French Terry, Sweatshirt Fleece. See Pick-A-Knit® Rule.

Lining: Tricot.

Notions: A,B: One 9" (23cm) medium-weight zipper (cut to fit). C,D: 1¼ yds. (1.1m) of 2" (5cm) elastic, 2¼ yds. (2.0m) of ¾" (1cm) drawstring.

Sizes	XS	S	M	L	XL	XXL
European	4-6	8-10	12-14	16-18	20-22	24-26
	30-32	34-36	38-40	42-44	46-48	50-52

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	29½-30½	31½-32½	34-36	38-40	42-44	46-48	Ins.
Waist	22-23	24-25	26½-28	30-32	34-37	39-41½	"
Hip-9" below waist	31½-32½	33½-34½	36-38	40-42	44-46	48-50	"
Back-neck to waist	15¼-15½	15¾-16	16¼-16½	16¾-17	17¼-17½	17¾-18	"

Top A	60**	1½	1½	1½	1½	2½	2½	Yds.
-------	------	----	----	----	----	----	----	------

Top B	60**	1½	1½	1½	1½	1½	1½	Yds.
-------	------	----	----	----	----	----	----	------

Contrast (Upper Front and Sleeve, Upper Back and Sleeve) - 60 - ¾ yd.**

Skirt C	60**	1	1	1	1	1½	1½	Yds.
---------	------	---	---	---	---	----	----	------

Lining C,D - 60* - ½ yd.**

Skirt D	60**	1½	1½	1½	1½	1½	1½	Yds.
---------	------	----	----	----	----	----	----	------

Contrast (Side Front and Side Back) - 60 - ¾ yd.**

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B Bust	39½	41½	45	49	53	57	Ins.
----------	-----	-----	----	----	----	----	------

C,D Hip	34	36	39½	43½	47½	51½	"
---------	----	----	-----	-----	-----	-----	---

Width, lower edge

Skirt C	35	37	40½	44½	48½	52½	Ins.
---------	----	----	-----	-----	-----	-----	------

Skirt D	38	40	43½	47½	51½	55½	"
---------	----	----	-----	-----	-----	-----	---

Finished back length from base of neck

Top A,B	17½	18	18½	19	19½	20	Ins.
---------	-----	----	-----	----	-----	----	------

Finished back length from waist

Skirt C	19	19	19	19	19	19	Ins.
---------	----	----	----	----	----	----	------

Skirt D	39	39	39	39	39	39	"
---------	----	----	----	----	----	----	---

*with nap **without nap

Moins Facile

HAUTS ET JUPES EN TRICOT POUR JEUNES FEMMES

Tissu Conseillé: Tricot de coton, Tissu bouclette, Jersey molletonné pour sweat-shirt.

Reportez-vous à la règle Pick-A-Knit®. **Doublure:** Tricot.

Mercerie: A,B: 1 fermeture à glissière de poids moyen de 23cm (coupée pour ajuster). C,D: 1.1m d'élastique de 5cm, 2.0m de cordon de 1cm.

Tailles	TP/XS	P/S	M/M	G/L	TG/XL	TTG/XXL
Françaises	32-34	36-38	40-42	44-46	48-50	52-54
Européen	30-32	34-36	38-40	42-44	46-48	50-52

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	75-77	80-83	87-92	97-102	107-112	117-122 cm
----------	-------	-------	-------	--------	---------	------------

Taille	56-58	61-64	67-71	76-81	87-94	99-105 "
--------	-------	-------	-------	-------	-------	----------

Hanches (23cm au-dessous de la taille)

	80-83	85-88	92-97	102-107	112-117	122-127 cm
--	-------	-------	-------	---------	---------	------------

Dos du cou à la taille

	39-39.5	40-40.5	41.5-42	42.5-43	44-44.5	45-45.5 "
--	---------	---------	---------	---------	---------	-----------

Haut A	150cm*	1.5	1.5	1.6	1.6	1.8	1.9	m
--------	--------	-----	-----	-----	-----	-----	-----	---

Haut B	150cm*	1.4	1.4	1.4	1.4	1.6	1.6	m
--------	--------	-----	-----	-----	-----	-----	-----	---

Contraste (Devant supérieur et manche, Dos supérieur et manche) - 150cm* - 0.8m

Jupe C	150cm*	0.9	0.9	0.9	0.9	0.9	1.1	m
--------	--------	-----	-----	-----	-----	-----	-----	---

Doublure C,D - 150cm - 0.6m**

Jupe D	150cm*	1.3	1.3	1.3	1.3	1.3	1.5	m
--------	--------	-----	-----	-----	-----	-----	-----	---

Contraste (Côté devant et Coté dos) - 150cm* - 0.6m

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B Poitrine	100	105	114	124	135	145	cm
--------------	-----	-----	-----	-----	-----	-----	----

C,D Hanches	86	91	100	110	121	131	"
-------------	----	----	-----	-----	-----	-----	---

Largeur à l'ourlet

Jupe C	89	94	103	113	123	133	cm
--------	----	----	-----	-----	-----	-----	----

Jupe D	97	102	110	121	131	141	"
--------	----	-----	-----	-----	-----	-----	---

Longueur finie - dos, votre nuque à l'ourlet




Haut A,B	44	46	47	48	50	51	cm
----------	----	----	----	----	----	----	----

Longueur finie - dos, taille à l'ourlet

Jupe C	48	48	48	48	48	48	cm
--------	----	----	----	----	----	----	----

Jupe D	99	99	99	99	99	99	"
--------	----	----	----	----	----	----	---

*avec sens **sans sens



Use the 1 inch (2.54cm) box to ensure you are using rule at 100%

Utilisez la boîte de 2,54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.

PICK-A-KNIT® RULE


FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE
POUR CE PATRON - LE JERSEY DOIT S'ÉTIRER DANS LA LARGEUR DE 4" (10 cm) DEPUIS ICI
PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO ANCHO POR 4" (10 cm) DESDE AQUI

TO HERE 35%
JUSQUE LA 35%
HASTA ALLA 35%


When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.
Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

Simplicity

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

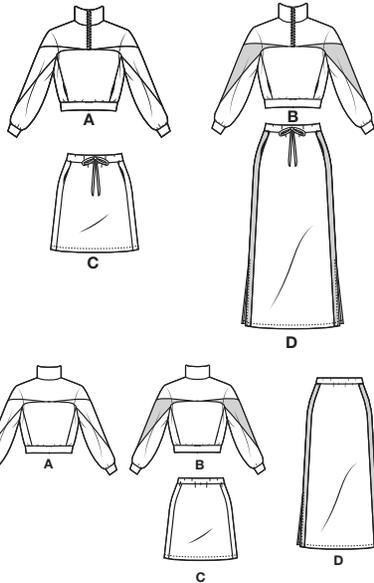

17 PIECES

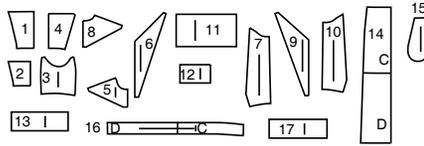

- 1 Front-A,B
- 2 Pocket-A,B
- 3 Side Front and Back-A,B
- 4 Back-A,B
- 5 Yoke Front-A,B
- 6 Upper Front and Sleeve-A,B
- 7 Under Sleeve Front-A,B
- 8 Yoke Back-A,B
- 9 Upper Back and Sleeve-A,B
- 10 Under Sleeve Back-A,B
- 11 Collar-A,B
- 12 Sleeve Band-A,B
- 13 Lower Band-A,B
- 14 Front and Back-C,D
- 15 Pocket-C,D
- 16 Side Front and Back-C,D
- 17 Casing-C,D

General Directions

The Pattern

- SYMBOLS**
- GRAIN LINE Place on straight grain of fabric parallel to selvage
 - PLACE SOLID LINE on fold of fabric.
 - CENTER FRONT OR BACK of garment.
 - NOTCHES
 - DOTS
 - CUTTING LINE
 - LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED

Make adjustments before placing pattern on fabric.

TO LENGTHEN: Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

TO SHORTEN: At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING:

PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.


PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING:


Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.

- To Quick Mark:**
- Snip edge of fabric to mark notches, ends of fold lines and center lines.
 - Pin mark dots.



Sewing


- SEW garment following **Sewing Directions**.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.

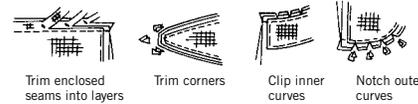

SPECIAL CUTTING NOTES

- ★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.
 - ✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).
- Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.
- Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).


Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

TOP A
USE PIECES 1 2 3 4 5 6 7 8 9 10 11 12 13

60" (150CM) WITH NAP
SIZES XS S M L

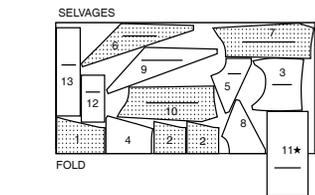


60" (150CM) WITH NAP
SIZES XL XXL

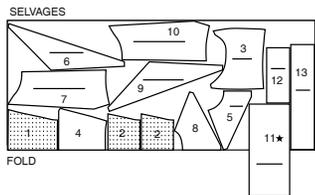


TOP B
USE PIECES 1 2 3 4 5 7 8 10 11 12 13

60" (150CM) WITH NAP
SIZES XS S M L




60" (150CM) WITH NAP
SIZES XL XXL




CONTRAST B (UPPER FRONT AND SLEEVE AND UPPER BACK AND SLEEVE)
USE PIECES 6 9

60" (150CM) WITH NAP
ALL SIZES




SKIRT C
USE PIECES 14 15 16 17

60" (150CM) WITH NAP
SIZES XS S M L XL




60" (150CM) WITH NAP
SIZE XXL

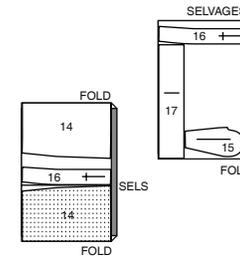


SKIRT D

USE PIECES 14 15 17

60" (150CM) WITH NAP
SIZES XS S M L XL

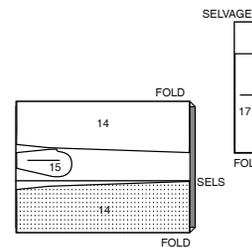

60" (150CM) WITH NAP
SIZES XXL

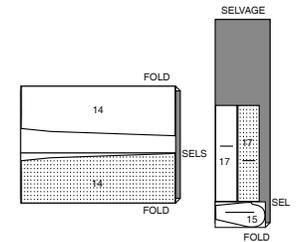

CONTRAST B (SIDE FRONT AND BACK)

USE PIECE 16


60" (150CM) WITH NAP
ALL SIZES



LINING POCKETS C D

USE PIECE 15

60" (150CM) WITH NAP
ALL SIZES



SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials

Sewing Directions

FABRIC KEY RIGHT SIDE WRONG SIDE INTERFACING LINING Lining

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan **QR CODE** to watch videos:

NARROW HEM - See [sewing narrow hems](#) video.

SLIPSTITCH - See [how to slipstitch](#) video.

STAYSTITCH - See [how to do stay-stitching](#) video.

STITCH IN THE DITCH - See [how to stitch in the ditch](#) video.

UNDERSTITCH - See [how to understitch](#) video.

TOP A, B

NOTE: For knit fabrics stay-stitching is optional.

NOTE: View A will be illustrated, unless otherwise indicated.

FRONT AND BACK

1. With **RIGHT** sides together, pin one **POCKET (2)** to **FRONT (1)** at side edges, matching large dots, having raw edges even. Stitch in a 5/8"(1.5cm) seam. **UNDERSTITCH** pocket.



2. Turn pocket to **INSIDE**. Press.

3. With **RIGHT** sides together, pin remaining pocket to each **SIDE FRONT AND SIDE BACK (3)** at side, matching large dots, having raw edges even. Stitch in a 5/8"(1.5cm) seam.

4. Press seams toward pocket, as shown.

5. With **RIGHT** sides together, pin side front and side back to front at side front seams, matching large dots and notches. Stitch side front seams, beginning at small dot, leaving an opening between large dots. Stitch upper pocket edges together to seams, keeping front free. Baste lower pocket edges.

6. Clip front seam allowances above pocket. Press seams open above clips. Baste lower pocket edges to front.

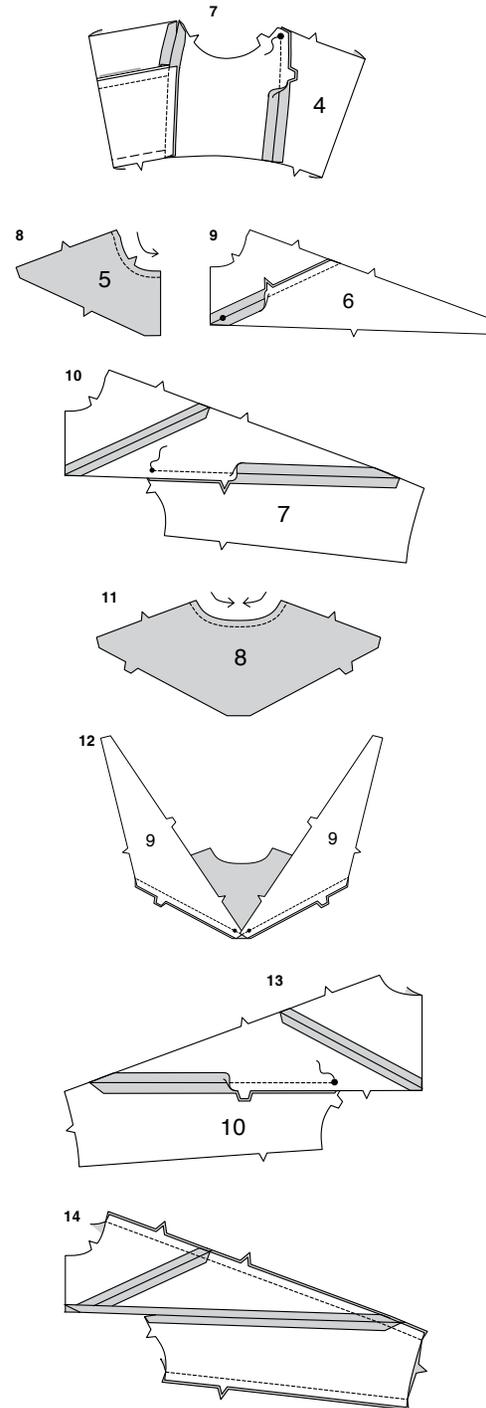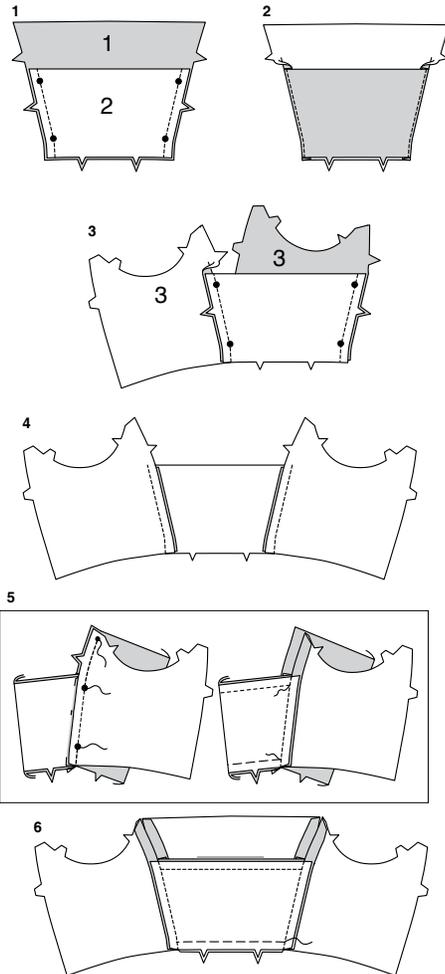

7. Pin **BACK (4)** to front at side back seams, matching large dots and notches. Stitch from large dot to lower edge.

8. STAYSTITCH neck edge of **YOKE FRONT (5)**.

9. With **RIGHT** sides together, pin **UPPER FRONT AND SLEEVE (6)** to lower edge of yoke front, matching large dots and notches. Stitch.











10. With **RIGHT** sides together, pin **UNDER SLEEVE FRONT (7)** to lower edge of upper front and sleeve, matching small dots and notches, as shown. Stitch, ending stitching at small dot.

11. STAYSTITCH neck edge of **YOKE BACK (8)**.

12. With **RIGHT** sides together, pin **UPPER BACK AND SLEEVE (9)** sections to lower edges of yoke back, matching small dots and notches. Stitch.







13. With **RIGHT** sides together, pin **UNDER SLEEVE BACK (10)** to lower edge of upper back and sleeve, matching large dots and notches, as shown. Stitch, ending stitching at large dot.

14. Stitch upper front and sleeve sections to upper back and sleeves at overarm and underarm edges.

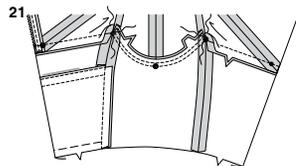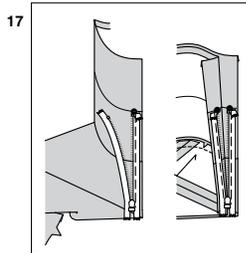

COLLAR, ZIPPER AND FINISHING

15. Press under 1/2" (1.3cm) on long unnotched edge of COLLAR (11). Trim pressed seam allowance to 3/8" (1cm).
16. With RIGHT sides together, pin collar to neck edge, matching centers and notches, placing small dots at shoulder seams, clipping to stay-stitching where necessary. Stitch, keeping pressed edge free, stretching collar to fit. Trim seam. Press seam toward collar.
17. Open zipper. On OUTSIDE, pin zipper (face down) along front opening edges, having zipper teeth just over the 5/8" (1.5cm) seam allowance and top stop 1/8" (3mm) below foldline. Fold down upper edges of zipper tape, as shown. Baste in place.
18. With RIGHT sides together, fold collar along foldline. Stitch front edges, using a zipper foot.
19. Turn collar self facing to inside, turning zipper and collar out. Press. Pin pressed edge over seam, placing pins on OUTSIDE.
20. On OUTSIDE, **STITCH IN THE DITCH** of collar seam through all layers.
21. With RIGHT sides together, pin upper front, upper back and sleeves to front and back, matching centers and notches, placing underarm seams at large dots, matching remaining dots. Stitch front between small dots. Stitch back between large dots. Stitch underarm edges. Stitch again 1/4" (6mm) away in seam allowance. Trim close to stitching. Press seam allowances toward front and back. Turn underarm seam toward sleeve.
22. Stitch ends of SLEEVE BAND (12) together.
23. With WRONG sides together, fold sleeve band in half lengthwise; press lightly. Pin raw edges together.
24. On OUTSIDE, pin sleeve band to sleeve, matching seam to underarm seam. Stitch, stretching sleeve band to fit. Stitch again 1/4" (6mm) away in seam allowance. Trim close to stitching. Press seam up, pressing sleeve band out.
25. Stitch LOWER BAND (13) sections together at ends.
26. With WRONG sides together, fold lower band in half lengthwise, matching notches, having raw edges even; press lightly. Pin raw edges together.
27. On OUTSIDE, pin lower band to top, matching centers, placing seams at small dots. Stitch, stretching lower band to fit. Stitch again 1/4" (6mm) away in seam allowance. Trim close to stitching. Press seam up, pressing lower band out.

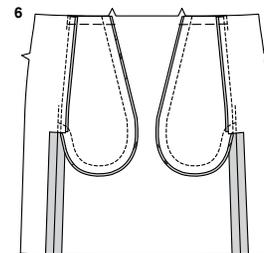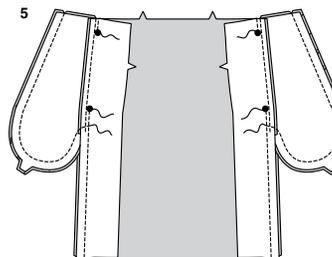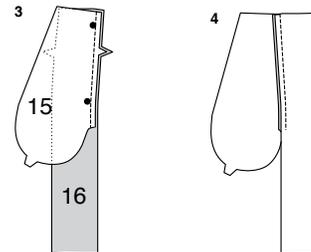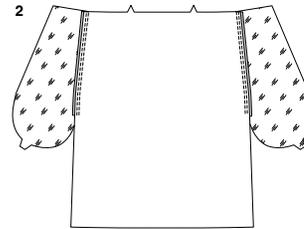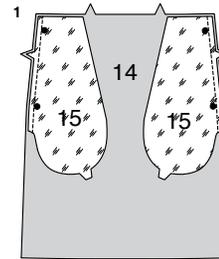


SKIRT C, D


NOTE: View C will be illustrated, unless otherwise indicated.

FRONT AND BACK

1. With RIGHT sides together, pin POCKET (lining) (15) sections to one FRONT AND BACK (14) section at each side, matching large dots, having raw edges even. Stitch in a 3/8" (1cm) seam. **UNDERSTITCH** pocket.
NOTE: Remaining front and back section will be used as back.
2. Press seams toward pockets, pressing pockets out.
3. For each side, with RIGHT sides together, pin one pocket (fabric) section to one SIDE FRONT AND BACK (16) section at side edge, matching large dots, having raw edges even. Stitch in a 3/8" (1cm) seam. **NOTE:** Remaining side front and back sections will be used for back.
4. Press seam toward pocket, pressing pocket out.
5. Pin side front to front at side edges, matching large dots. Stitch side front seams, leaving an opening between large dots. Stitch pocket edges together to side seam.
6. Clip side front seam allowances below pockets. Press seams open below clips. Press pockets toward front. Baste upper edges.

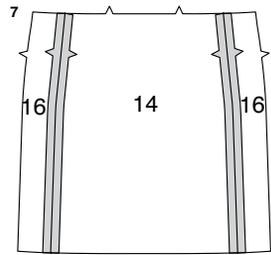


7. With RIGHT sides together, pin remaining side front and side back sections to back at side edges, matching notches. Stitch.

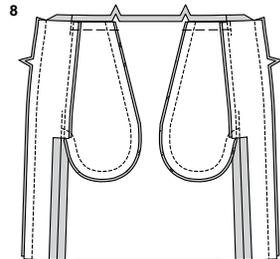


FOR VIEW A

8. Stitch front to back at side seams.

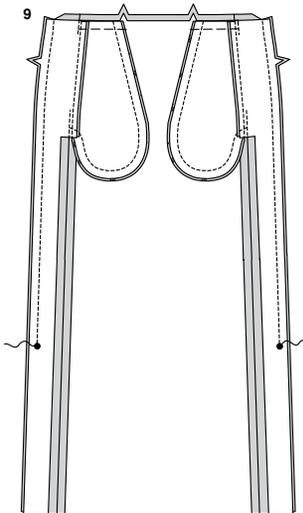


FOR VIEW B

9. Stitch front to back at side seams, leaving open below large dots.

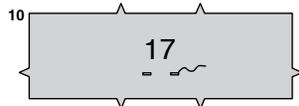


CASING AND FINISHING


10. Make buttonholes in CASING (17) at markings.

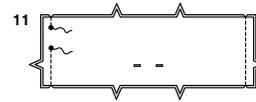



11. Stitch casing sections together at side seams, leaving open between small dots, as shown.

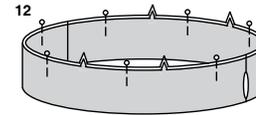

12. With WRONG sides together, fold casing in half lengthwise, matching notches, having raw edges even. Pin raw edges together.


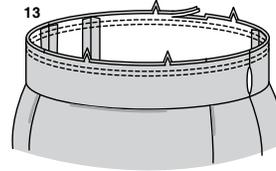


13. On OUTSIDE, pin casing to upper edge, matching centers, notches and side seams. Stitch. Stitch again 1/4" (6mm) away in seam allowance. Trim close to stitching. Press seam toward skirt, pressing casing out.




14. Cut a piece of elastic 26" (66cm) long. Insert elastic through opening in casing. Overlap ends and hold with a safety pin.

15. Stitch ends of elastic together securely.




16. SLIPSTITCH opening. Distribute fullness evenly.

17. Cut a piece of drawstring approximately 62" (157cm) long. Insert drawstring into casing through one buttonhole and out through the remaining buttonhole, extending ends evenly. Tie ends in a knot.



FOR VIEW A

18. Turn up 1 1/4" (3.2cm) hem on lower edge of skirt. Turn 1/4" (6mm) on raw edge of hem to wrong side; press. Stitch close to inner edge of hem.

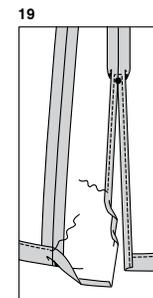

FOR VIEW B

19. Turn up 1 1/4" (3.2cm) hem on lower edges of skirt. Turn 1/4" (6mm) on raw edge of hem to wrong side; press. Stitch close to inner edge of hem. Make NARROW HEM at side opening edges, tapering to nothing above large dot, squaring stitching at opening.



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
[@simplicity_creative_group](#) and [#simplicitypatterns](#)
for a chance to be featured on our social media.

Look for more PDF patterns at simplicity.com

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.