

S3064

**miG** A DIY & LIFESTYLE BRAND



Scan QR code for a Sew-Along tutorial by sewing celebrity Mimi G.

**Simplicity**  
easy-TO-SW Designed and printed in USA.

Easy

Facile

**MISSES' AND WOMEN'S KNIT DRESS IN TWO LENGTHS**

**Suggested Fabrics:** A,B: Two-way Stretch Knits only such as ITY, Jersey, Rib Knit, Spandex Blends. See Pick-A-Knit® Rule. **Lining:** Interlock Knit Lining, Stretch Nylon Spandex Compression Mesh, Stretch Nylon Spandex Power Mesh, Tricot Lining.

**Notions:** A,B: ¼" (6mm) elastic: 1¼ yds. (1.1m) for Misses, 1¾ yds. (1.3m) for Women.

| MISSES' SIZES | 10 | 12 | 14 | 16 | 18 |
|---------------|----|----|----|----|----|
| EUROPEAN      | 36 | 38 | 40 | 42 | 44 |

**BODY MEASUREMENTS: Select pattern size based on body measurements**

|                    |     |     |     |     |    |      |
|--------------------|-----|-----|-----|-----|----|------|
| Bust               | 32½ | 34  | 36  | 38  | 40 | Ins. |
| Waist              | 25  | 26½ | 28  | 30  | 32 | "    |
| Hip-9" below waist | 34½ | 36  | 38  | 40  | 42 | "    |
| Back-neck to waist | 16  | 16¼ | 16½ | 16¾ | 17 | "    |

**Lining A,B** 60\*\*\* ½ % % % % % Yd.

**Dress A** 60\*\* 1¼ 1¼ 1¼ 1¼ 1¼ Yds.

**Dress B** 60\*\* 1¾ 1¾ 1¾ 1¾ 1¾ Yds.

| WOMEN'S SIZES | 20W | 22W | 24W | 26W | 28W |
|---------------|-----|-----|-----|-----|-----|
| EUROPEAN      | 46  | 48  | 50  | 52  | 54  |

**BODY MEASUREMENTS: Select pattern size based on body measurements**

|                    |     |    |     |     |     |      |
|--------------------|-----|----|-----|-----|-----|------|
| Bust               | 52  | 54 | 56  | 58  | 60  | Ins. |
| Waist              | 46½ | 49 | 51½ | 53  | 54½ | "    |
| Hip-9" below waist | 54  | 56 | 58  | 60  | 62  | "    |
| Back-neck to waist | 17¼ | 18 | 18¼ | 18¾ | 18¾ | "    |

**Lining A,B** 60\*\*\* % % % % % % Yd.

**Dress A** 60\*\* 1¼ 1¼ 1¼ 1¼ 1¼ Yds.

**Dress B** 60\*\* 1¾ 1¾ 2 2 2 Yds.

**NOTE:** Please refer to the sewing instructions for FINISHED GARMENT MEASUREMENTS.

\*with nap \*\*without nap

**ROBE EN TRICOT EN DEUX LONGUEURS POUR JEUNES FEMMES ET FEMMES**

**Tissus Conseillés:** A,B: Tricot extensible dans les deux sens seulement tel que Tricot interlock en fil retors, Jersey, Tricot à côtes, Mélanges de Élasthanne. Reportez-vous à la règle Pick-A-Knit®. **Doubleure:** Doubleure de tricot de interlock, maille de compression en nylon et spandex extensible, Maille de puissance en nylon et spandex extensible, doubleure de tricot.

**Mercerie:** A,B: Élastique de 6mm: 1.1m pour Jeunes Femmes, 1.3m pour Femmes.

| TAILLES (J. FEMMES) | 10 | 12 | 14 | 16 | 18 |
|---------------------|----|----|----|----|----|
| FRANÇAISES          | 38 | 40 | 42 | 44 | 46 |
| EUROPEEN            | 36 | 38 | 40 | 42 | 44 |

**MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps**

|  |      |      |    |      |     |    |
|--|------|------|----|------|-----|----|
| Poitrine                               | 83   | 87   | 92 | 97   | 102 | cm |
| Taille                                 | 64   | 67   | 71 | 76   | 81  | "  |
| Hanches (23cm au-dessous de la taille) | 88   | 92   | 97 | 102  | 107 | cm |
| Dos du cou à la taille                 | 40.5 | 41.5 | 42 | 42.5 | 43  | "  |

**Doubleure A,B** 150cm\*\* 0.5 0.5 0.5 0.6 0.6 m

**Robe A** 150cm\* 1.0 1.0 1.0 1.0 1.0 m

**Robe B** 150cm\* 1.6 1.6 1.6 1.6 1.6 m

| TAILLES (FEMMES) | 20W | 22W | 24W | 26W | 28W |
|------------------|-----|-----|-----|-----|-----|
| FRANÇAISES       | 48  | 50  | 52  | 54  | 56  |
| EUROPEEN         | 46  | 48  | 50  | 52  | 54  |

**MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps**

|  |      |     |     |      |     |    |
|--|------|-----|-----|------|-----|----|
| Poitrine                               | 132  | 137 | 142 | 147  | 152 | cm |
| Taille                                 | 118  | 124 | 130 | 134  | 138 | "  |
| Hanches (23cm au-dessous de la taille) | 137  | 142 | 147 | 152  | 157 | cm |
| Dos du cou à la taille                 | 45.5 | 46  | 46  | 46.5 | 47  | "  |


**Doubleure A,B** 150cm\*\* 0.6 0.6 0.6 0.6 0.6 m

**Robe A** 150cm\* 1.1 1.1 1.1 1.1 1.1 m

**Robe B** 150cm\* 1.7 1.7 1.7 1.7 1.8 m

**NOTE:** S'il vous plaît, reportez-vous au instructions de couture pour les MESURES DU VÊTEMENTS FINI.

\*avec sens \*\*sans sens



Use the 1 inch (2.54cm) box to ensure you are using rule at 100%

Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.

**PICK-A-KNIT® RULE**

**FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE POUR CE PATRON - LE JERSEY DOIT S'ETIRER DANS LA LARGEUR DE 4" (10 cm) DEPUIS ICI PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO ANCHO POR 4" (10 cm) DESDE AQUI**




**TO HERE 50% JUSTE LA 50% HASTA ALLA 50%**



When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.  
Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.  
Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.


# Simplicity®

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

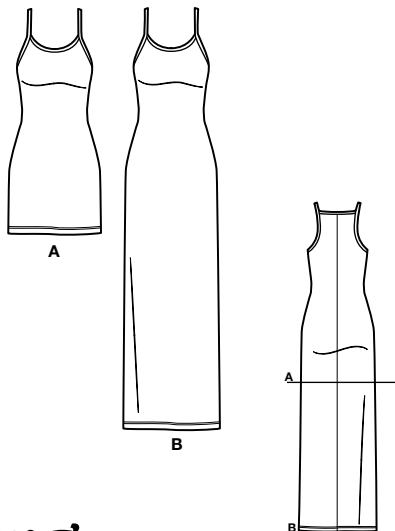

**mi g** A DIY & LIFESTYLE BRAND

8 PIECES

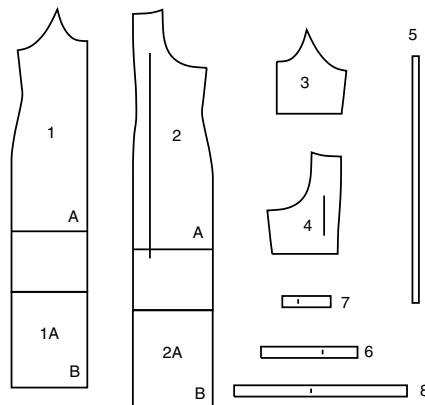

- 1 Front-A,B
- 1A Extension-B
- 2 Back-A,B
- 2A Extension-B
- 3 Front Facing-A,B
- 4 Back Facing-A,B
- 5 Guide for Elastic-A,B
- 6 Front Binding-A,B
- 7 Back Binding-A,B
- 8 Armhole Binding-A,B

## General Directions

### The Pattern

- SYMBOLS**
- ↔ GRAIN LINE Place on straight grain of fabric parallel to selvage
  - ⇄ PLACE SOLID LINE on fold of fabric.
  - CENTER FRONT OR BACK of garment.
  - ∇ NOTCHES
  - ○ DOTS
  - CUTTING LINE
  - == LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

**ADJUST IF NEEDED**  
Make adjustments before placing pattern on fabric.

**TO LENGTHEN:**  
Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

**TO SHORTEN:**  
At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

### Cutting/Marking

**BEFORE CUTTING:**  
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.


PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

**AFTER CUTTING:**  
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


**To Quick Mark:**

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.




### Sewing

- SEW garment following Sewing Directions.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.




### SPECIAL CUTTING NOTES

★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.




✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).



## Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

| MISSES' SIZES EUROPEAN | 10 | 12 | 14 | 16 | 18 |
|------------------------|----|----|----|----|----|
|                        | 36 | 38 | 40 | 42 | 44 |

| FINISHED GARMENT MEASUREMENTS          |     |     |     |     |     |      |
|--|-----|-----|-----|-----|-----|------|
| A,B Bust                               | 32½ | 34  | 36  | 38  | 40  | Ins. |
| A,B Waist                              | 26  | 27½ | 29½ | 31½ | 33½ | "    |
| A,B Hip                                | 34½ | 36  | 38  | 40  | 42  | "    |
| Width, lower edge                      |     |     |     |     |     |      |
| Dress A,B                              | 34½ | 36  | 38  | 40  | 42  | Ins. |
| Finished back length from base of neck |     |     |     |     |     |      |
| Dress A                                | 34  | 34½ | 34½ | 34½ | 35  | Ins. |
| Dress B                                | 58  | 58½ | 58½ | 58½ | 59  | "    |


| WOMEN'S SIZES EUROPEAN | 20W | 22W | 24W | 26W | 28W |
|------------------------|-----|-----|-----|-----|-----|
|                        | 46  | 48  | 50  | 52  | 54  |

| FINISHED GARMENT MEASUREMENTS          |     |     |     |     |     |      |
|--|-----|-----|-----|-----|-----|------|
| A,B Bust                               | 38  | 40  | 42  | 44  | 46  | Ins. |
| A,B Waist                              | 35  | 37  | 39  | 41  | 43  | "    |
| A,B Hip                                | 42½ | 44½ | 46½ | 48½ | 50½ | "    |
| Width, lower edge                      |     |     |     |     |     |      |
| Dress A,B                              | 42½ | 44½ | 46½ | 48½ | 50½ | Ins. |
| Finished back length from base of neck |     |     |     |     |     |      |
| Dress A                                | 36½ | 36½ | 36½ | 37  | 37½ | Ins. |
| Dress B                                | 59½ | 59½ | 59½ | 60  | 60½ | "    |


### DRESS A

USE PIECES 1 2 6 7 8  
PIECES 6 AND 7 ARE EACH CUT ONE.

60" (150CM) WITH NAP  
SIZES 10 12 14 16 18



60" (150CM) WITH NAP  
SIZES 20W 22W 24W 26W 28W  
PIECE 7 IS CUT ONE




### DRESS B

USE PIECES 1(1A) 2(2A) 6 7 8

**NOTE:** BEFORE CUTTING FABRIC, JOIN PIECES IN PARENTHESES TO CORRESPONDING PIECES FOLLOWING INSTRUCTIONS ON TISSUE PATTERN.


60" (150CM) WITH NAP  
SIZES 10 12 14 16 18

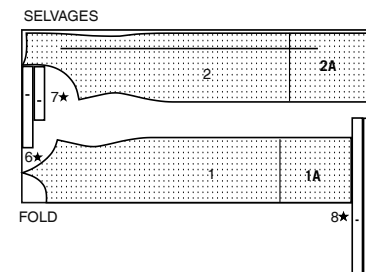

CUTTING LAYOUTS CONTINUED ON PAGE 2

60" (150CM)  
WITH NAP  
SIZES 20W 22W 24W 26W 28W


PIECE 7 IS CUT ONE

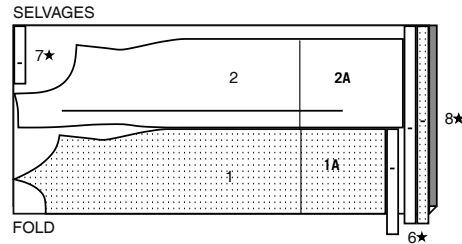


### STRETCH LINING A,B

USE PIECES 3 4

60" (150CM)  
WITH NAP  
ALL SIZES



## Sewing Directions



Read **General Directions** on page 1 before you begin.~

### GLOSSARY OF SEWING METHODS

Sewing methods shown in **BOLD TYPE** are defined below:

**DOUBLE-STITCH** - Stitch seam along seamline; stitch again 1/4" (6mm) away in seam allowance using a straight stitch OR zigzag stitch; trim close to second stitching OR overlock seam.

**EDGESTITCH** - Stitch close to finished edge or seam.

### SIMPLY THE BEST SEWING TECHNIQUES FOR KNITS

- Use a ball point or stretch needle.
- Stretch knits need seams that are supple enough to "give" with the fabric. You can sew them with straight stitches (stretching the fabric slightly as you sew), narrow zig-zag stitches or one of the stretch stitches built into many conventional machines, or on your serger.
- Some knits require very little or no pressing while sewing. Use the appropriate temperature setting. Press lightly or use steam.
- To prevent shoulder seams from stretching, pin center of hem tape, clear elastic or twill tape along seam line on front shoulder edges, then stitch the shoulder seams.
- Stitch hems in place 1/4" (6mm) from raw edge.
- Raw edges of hem and facings are left raw, unless using a serger.
- Use a twin sewing machine needle for a double stitched hem.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

## DRESS A, B

**NOTE:** The first view mentioned will be shown, unless otherwise mentioned.

**1. DOUBLE-STITCH** center back seam in BACK (2).

**2. DOUBLE-STITCH** FRONT (1) to back at sides.


**3. DOUBLE-STITCH** center back seam in BACK FACING (4).


**4. DOUBLE-STITCH** FRONT FACING (3) to back facing at sides.

**5.** For casing, turn in 1/2" (1.3cm) on lower edge of facing. Stitch close to upper raw edge, leaving an opening to insert elastic.


**6.** Cut a piece of 1/4" (6mm) wide elastic using GUIDE FOR ELASTIC (5). Insert elastic through casing. Lap ends and hold with a safety pin. Slip on facing and adjust, if necessary. Stitch ends of elastic securely.

**7.** Stitch opening, stretching elastic while stitching.

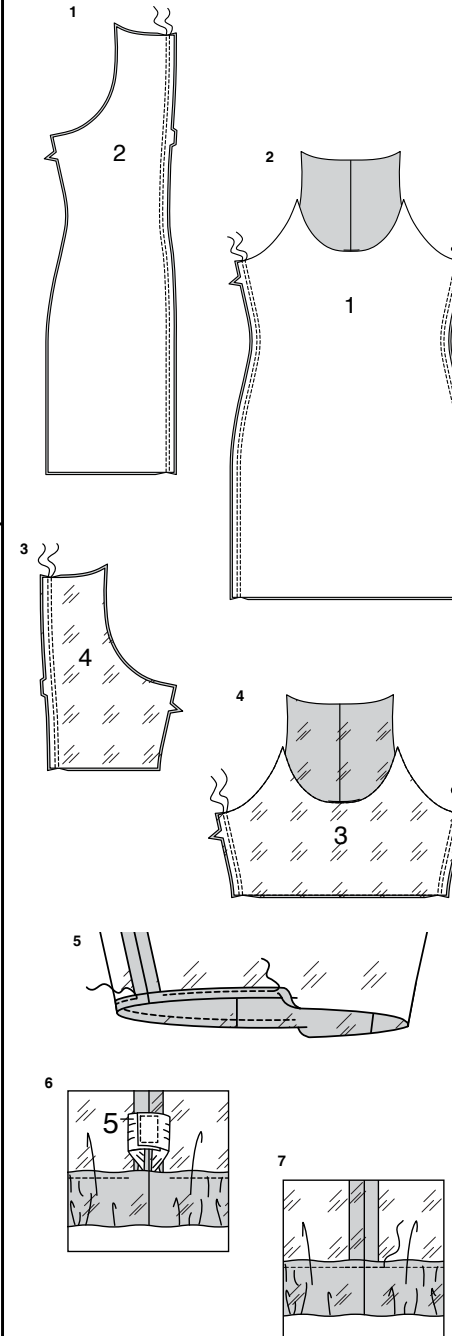





- 8.** With WRONG sides together, pin facing to dress matching seams and centers. Baste upper and armhole edges together.




- 9.** Press under  $3/8"$  (1cm) on lower edge of FRONT BINDING (6). On INSIDE, pin RIGHT side of front binding to WRONG side of front, matching centers and small dots, having raw edges even. Stitch in  $3.8"$  (1cm) seam, stretching binding to fit.

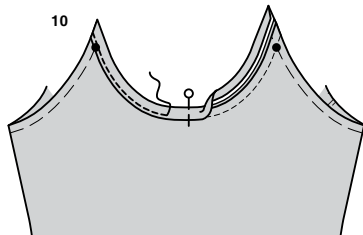


- 10.** Press binding out, pressing seam toward binding. Turn the folded edge of binding to OUTSIDE so that it encases the raw edge and just covers the stitching line, matching center fronts and small dots. Pin in place. **EDGESTITCH** binding, stretching binding to fit.

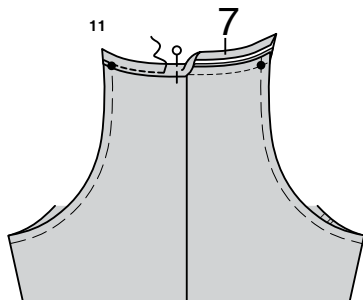

- 11.** Prepare and stitch BACK BINDING (7) to back in same manner as front binding.




- 12.** For armhole binding and shoulder strap, stitch notched ends of ARMHOLE BINDING (8). Press under  $3/8"$  (1cm) on one long edge of binding.




- 13.** On INSIDE, pin RIGHT side of binding to WRONG side of armhole edge, matching seams and small dots. Stitch in  $3/8"$  (1cm) seam between small dots, as shown, stretching binding to fit.

14

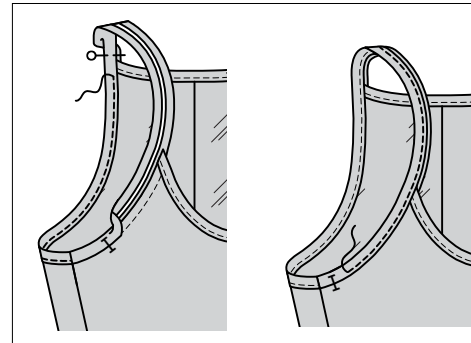

- 14.** Press binding out, pressing seam toward binding and continuing to press under  $3/8"$  (1cm) on remaining edge of shoulder strap. Turn the pressed edge of binding to OUTSIDE so that it encases the raw edge and just covers the stitching line. Pin in place. Pin pressed edges of shoulder strap together. **EDGESTITCH** binding close to seam, stretching binding to fit, continuing to stitch pressed edges of shoulder strap together.

15

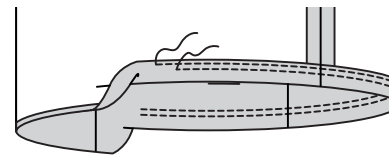

- 15.** Mark length. Press up hem along marking. Mark depth of hem; trim evenly. Press under  $1/4"$  (6mm) on raw edge. Stitch close to inner pressed edge. Stitch again  $1/4"$  (6mm) below previous stitching.



# Congrats!

You've completed your sewing adventure

---

## SHARE YOUR LOOK



Post your pattern and tag us using [#simplicitypatterns](#)  
[@simplicity\\_creative\\_group](#)  
[@simplicitymccallsuk](#)  
[@simplicitymccallsaustralia](#)  
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](#) or for customers outside the U.S. and Canada visit [sewdirect.com](#) and [sewdirect.com.au](#)

Have a question or need help with your sewing project contact us:  
[Simplicity.com](#)    [Sewdirect.com](#)    [Sewdirect.com.au](#)



Simplicity ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA [www.thedesigngroup.com](#) • All Rights Reserved. [www.simplicity.com](#) • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.