

S3066

Simplicity



A



B



A

Designed and printed in USA.

Average

MISSES' SPECIAL OCCASION GOWNS

Suggested Fabrics: Brocade, Mikado, Satin, Shantung. **A Contrast 1:** Lace, Sequin Fabric. **A Contrast 2, B Contrast:** Chiffon, Soft Tulle. **Lining:** Lining Fabric. **Interfacing:** Lightweight fusible.

Notions: A,B: One 14" (36cm) invisible zipper (adjust to fit).

Sizes	8	10	12	14	16	18	20	22	24	26
European	34	36	38	40	42	44	46	48	50	52

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	31½	32½	34	36	38	40	42	44	46	48	48	Ins.
Waist	24	25	26½	28	30	32	34	37	39	41½	"	
Hip-9" below waist	33½	34½	36	38	40	42	44	46	48	50	"	
Back-neck to waist	15¾	16	16¼	16½	16¾	17	17¼	17½	17¾	17¾	"	

A Contrast 2, B Contrast (Front Inset):

60**	½	½	½	½	½	½	½	½	½	¾	Yd.
Lining A,B	45***	2¾	3	3	3	3	3	3	3	3	"
Interfacing	-	20"	-	¾	yd.						

Dress A	45**	3	3	3¾	3¾	3¾	3¾	3¾	3¾	3¾	3¾	Yds.
60**	2¾	2¾	2¾	2¾	2¾	2¾	2¾	2¾	2¾	3	3	"

Contrast 1 (Bodice Front and Back)

45**	¾	¾	¾	¾	¾	¾	¾	1	1	1	1	Yds.
60**	¾	¾	¾	¾	¾	¾	¾	¾	¾	¾	¾	"

Dress B	45**	3	3	3¾	3¾	3¾	3¾	3¾	3¾	3¾	3¾	Yds.
60**	2¾	2¾	2¾	2¾	2¾	2¾	2¾	2¾	2¾	3	3	"

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B Bust	33½	34½	36	38	40	42	44	46	48	50	Ins.
----------	-----	-----	----	----	----	----	----	----	----	----	------

A,B Waist	41	42	43½	45½	47½	49½	51½	53½	55½	57½	"
-----------	----	----	-----	-----	-----	-----	-----	-----	-----	-----	---

Width, lower edge

Dress A,B	61	62	63½	65½	67½	69½	71½	73½	75½	77½	Ins.
-----------	----	----	-----	-----	-----	-----	-----	-----	-----	-----	------

Finished back length from base of neck

Dress A,B	57¾	58	58¾	58¾	58¾	59	59¼	59¼	59¾	60	Ins.
-----------	-----	----	-----	-----	-----	----	-----	-----	-----	----	------

*with nap **without nap

Moins Facile

ROBES POUR OCCASIONS SPÉCIALES POUR JEUNES FEMMES

Tissus Conseillés: Brocart, Mikado, Satin, Shantung. **A Contraste 1:** Dentelle, Tissu à paillettes. **A Contraste 2, B Contraste:** Mousseline, Tulle souple. **Doubleure:** Tissu à doubler. **Entoilage:** Thermocollant léger.

Mercerie: A,B: 1 fermeture à glissière invisible de 36cm (adaptez pour ajuster).

Tailles	8	10	12	14	16	18	20	22	24	26
Françaises	36	38	40	42	44	46	48	50	52	54
Européen	34	36	38	40	42	44	46	48	50	52

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	80	83	87	92	97	102	107	112	117	122	cm
Taille	61	64	67	71	76	81	87	94	99	106	"
Hanches (23cm au-dessous de la taille)	85	88	92	97	102	107	112	117	122	127	cm
Dos du cou à la taille	40	40.5	41.5	42	42.5	43	44	44	44.5	44.5	"

A Contraste 2, B Contraste (Empiècement devant):

150cm*	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	m
Doubleure A,B	115cm**	2.5	3.1	3.1	3.1	3.1	3.1	3.2	3.2	3.2	"
Entoilage -	51cm	-	0.8m								

Robe A	115cm*	2.7	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.4	m
150cm*	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.7	2.7	"

Contraste 1 (Corsage devant et dos)

115cm*	0.6	0.6	0.6	0.7	0.8	0.8	0.8	0.9	1.0	1.0	m
150cm*	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	"

Robe B	115cm*	2.9	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4	m
150cm*	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.7	2.7	"

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B Poitrine	85	88	91	97	102	107	112	117	122	127	cm
--------------	----	----	----	----	-----	-----	-----	-----	-----	-----	----

A,B Taille	104	107	110	116	121	126	131	136	141	146	"
------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---


Largeur à l'ourlet

Robe A,B	155	157	161	166	171	177	182	187	192	197	cm
----------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----


Longueur finie - dos, votre nuque à l'ourlet

Robe A,B	147	147	148	149	149	150	150	151	152	152	cm
----------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----

*avec sens **sans sens

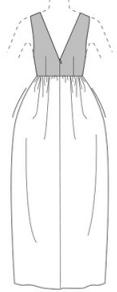


A

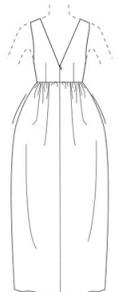


B

Simplicity®

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

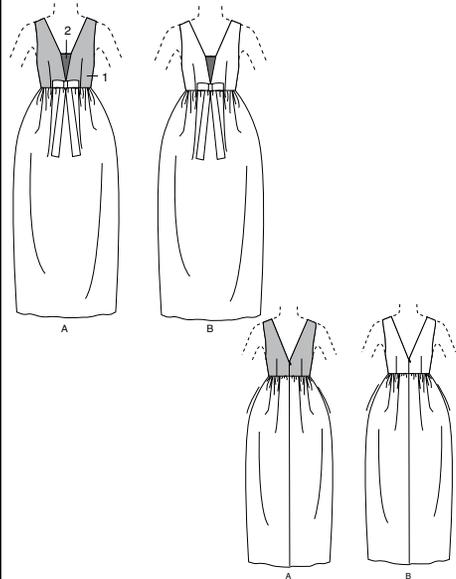

10 PIECES

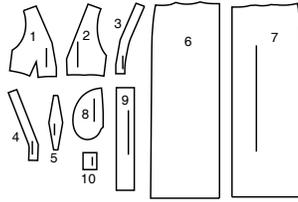



- 1 Bodice Front-A,B
- 2 Bodice Back-A,B
- 3 Front Interfacing-A,B
- 4 Back Interfacing-A,B
- 5 Front Inset-A,B
- 6 Skirt Front-A,B
- 7 Skirt Back-A,B
- 8 Pocket-A,B
- 9 Bow-A,B
- 10 Knot-A,B

General Directions

The Pattern

- SYMBOLS**
- GRAIN LINE Place on straight grain of fabric parallel to selvage
 - PLACE SOLID LINE on fold of fabric.
 - CENTER FRONT OR BACK OF garment.
 - NOTCHES
 - DOTS
 - CUTTING LINE
 - LENGTHEN OR SHORTEN LINES
- SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
Make adjustments before placing pattern on fabric.



When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING:
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.
PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts


AFTER CUTTING:
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.

- To Quick Mark:**
- Snip edge of fabric to mark notches, ends of fold lines and center lines.
 - Pin mark dots.



Sewing


- SEW garment following **Sewing Directions**.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.



SPECIAL CUTTING NOTES

- ★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.
- ✳ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).
- Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).

Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE


LINING A,B

USE PIECES 1 2 6 7 8

45" (115CM) WITHOUT NAP
WITHOUT NAP
SIZE 8

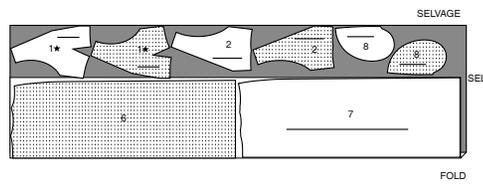


45" (115CM) WITHOUT NAP
WITHOUT NAP
SIZE 10 12 14 16 18 20 22 24 26

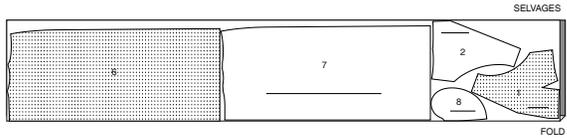

INTERFACING A,B

USE PIECES 3 4


20" (54CM) ALL SIZES

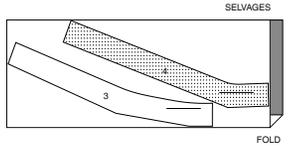


DRESS A, B

USE PIECES 1 2 6 7 8 9 10
PIECE 10 IS CUT ONE


45" (115CM) WITH NAP
WITH NAP
SIZE 8

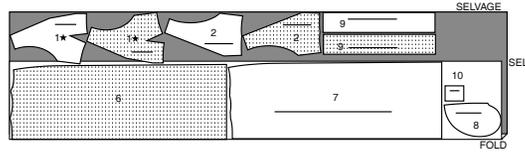


45" (115CM) WITH NAP
WITH NAP
SIZE 10 12 14 16 18 20 22 24 26

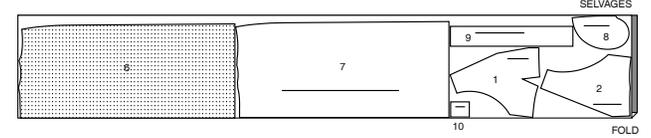

60" (150CM) WITH NAP
WITH NAP
SIZES 8 10 12 14 16 18 20 22

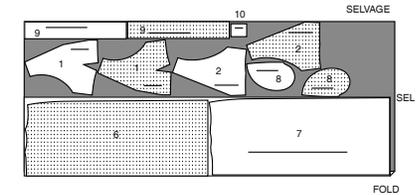




60" (150CM) WITH NAP
WITH NAP
SIZES 24 26

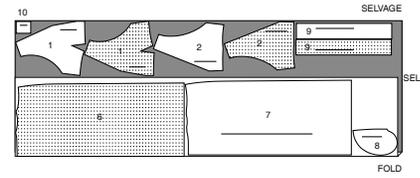

CUTTING LAYOUTS CONTINUED ON PAGE 2

CONTRAST 1A (BODICE OVERLAY)


USE PIECES 1 2

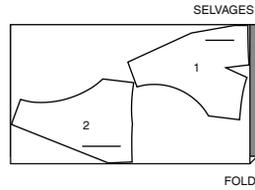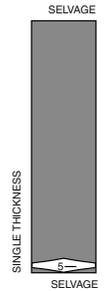45" (115CM)
WITH NAP
ALL SIZES60" (150CM)
WITH NAP
ALL SIZES**CONTRAST 2A, CONTRAST B (INSET)**
USE PIECE 560" (150CM)
WITH NAP
ALL SIZES

SEWING TUTORIALS



SCAN ME

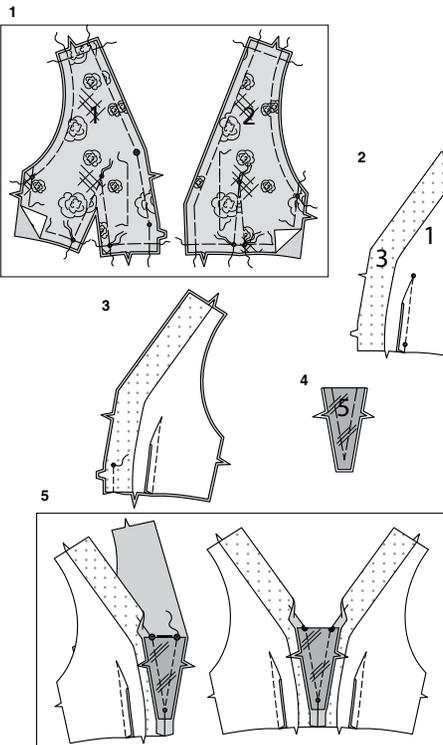Build your skills viewing short, easy-to-follow videos at
simplicity.com/sewingtutorials**Sewing Directions**

FABRIC KEY


RIGHT SIDE WRONG SIDE INTERFACING LINING LINING

Read **General Directions** on page 1 before you begin.Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:**CATCHSTITCH** - See **how to catchstitch** video.**DART** - See **sewing flat dart** video.**FINISH** - See how to **finish** video.**GATHER** - See **sewing two row gathers** video.**INVISIBLE ZIPPER** - See **sewing an invisible zipper** video.**NARROW HEM** - See **how to narrow hem** video.**SLIPSTITCH** - See **how to slipstitch** video.**UNDERSTITCH** - See **how to understitch** video.**DRESS A, B****NOTE:** Under each sub-heading, the first View will be illustrated, unless otherwise indicated**BODICE**

- VIEW A:** Working on a flat surface, pin wrong side of **CONTRAST** overlay to right side of each matching **FABRIC** section. Baste through all symbols and lines of construction, as shown, leaving both ends of thread free for easy removal. **NOTE:** Contrast will not be shown in the following illustrations.

VIEWS A, B:

- Pin **FRONT INTERFACING** (3) to **WRONG** side of **BODICE FRONT** (1), matching dots and notches. Fuse, following manufacturer's instructions. Stitch dart seam in bodice front. Press seam towards center.
- Stitch bodice front sections together at center front seam, ending stitching at small dot.
- With **WRONG** sides together, fold **FRONT INSET** (5) along foldline. Press. Baste raw edges.
- Pin front inset to bodice front, matching small and large dots. Stitch, breaking stitching at small dot. Press seams toward bodice.

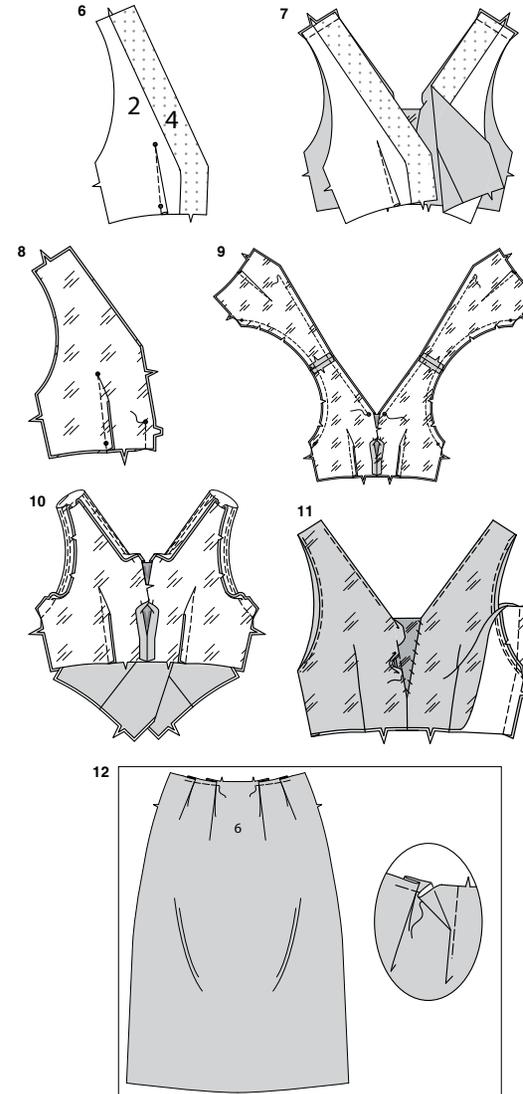

- Pin **BACK INTERFACING** (4) to **WRONG** side of **BODICE BACK** (2), matching notches. Fuse, following manufacturer's instructions. Stitch **DART** in bodice back. Press dart toward center.

- Stitch front to back at shoulder seams.

- Stitch dart seam in bodice front **LINING** (1). Stitch bodice front lining sections together at center front seam, ending stitching at small dot.


- Stitch **DART** in bodice back **LINING** (2). Press dart toward center. Stitch front lining to back lining at shoulder seams. With **RIGHT** sides together, pin bodice lining to bodice, matching centers and dots. Stitch upper edges from large dots on front to 2" (cm) from center back edges. Stitch armhole edges. Trim seams. **UNDERSTITCH** lining as far as possible.

- Turn lining to **INSIDE** by pulling back sections through shoulders and both out lower opening in front. Press.

- Open out lining at sides. Pin front and back together at sides; pin lining edges together. Stitch in one continuous seam. Turn down lining. Press under remainder of seam allowances on front edges. **SLIPSTITCH** pressed edges over seams.


SKIRT AND ZIPPER

- To make pleats in **SKIRT FRONT** (6), on **OUTSIDE**, crease along solid lines. Bring creases to broken lines. Pin. Baste across upper edge. Press.

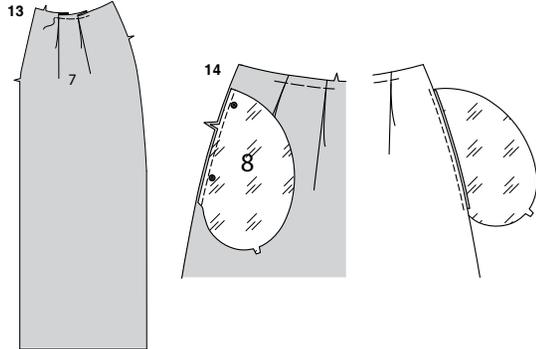


13. To make pleats in SKIRT BACK (7), on OUTSIDE, crease along solid lines. Bring creases to broken lines. Pin. Baste across upper edge. Press.

14. Stitch one POCKET (8) section (lining) to front at each side in 1/4" (6mm) seam. Press seams toward pockets.

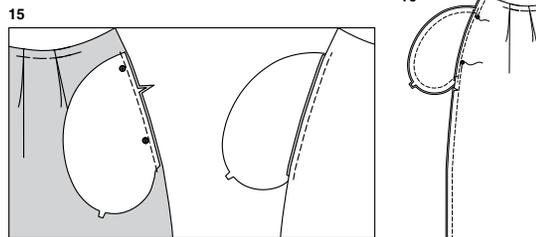


15. Stitch one POCKET section (fabric) to back at each side in 1/4" (6mm) seam. Press seams toward pockets.

16. Stitch front and back together at sides, leaving open between large dots. Stitch pocket edges together to side seams. Clip back seam allowances above and below pockets.

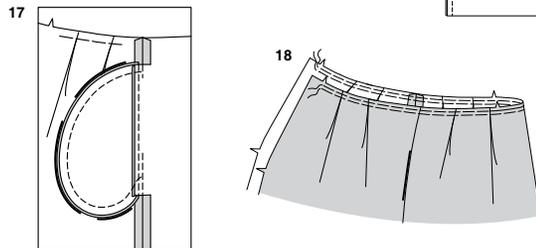

17. Turn pockets toward front along seamlines; press.


18. GATHER upper edge of skirt between back notches.

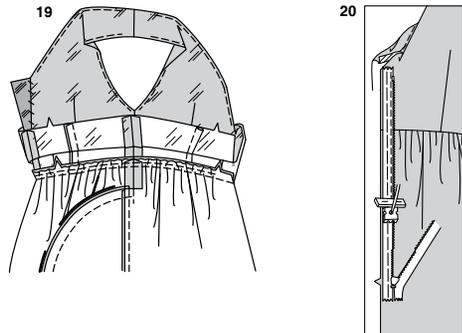

19. With RIGHT sides together, pin skirt to bodice, matching centers and side seams, keeping bodice lining free. Adjust gathers; baste. Stitch. Press seam toward bodice.


NOTE: Stitch the INVISIBLE ZIPPER using an invisible zipper foot. If the zipper is longer than the zipper opening, adjust after the zipper is inserted.

20. Open the zipper and press the tape using a cool iron. On OUTSIDE, pin RIGHT side of the zipper face down on the RIGHT side of the zipper opening. Have the coil along the seam line, the tape within the seam allowance and the top stop 3/4" (2cm) below upper edge, as shown. Hand-baste along center of the tape. Position zipper foot at the top of the zipper with RIGHT groove of the foot over coil. Stitch along tape to the notch. Back-stitch to reinforce.

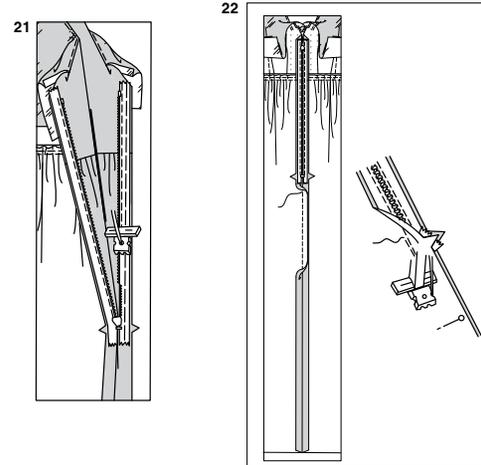


21. Pin the remaining half of the zipper to the LEFT side of the zipper opening in same manner. Hand-baste along the center of the tape. Position zipper foot at the top of the zipper with LEFT groove over the coil. Stitch along tape to lower notch, keeping dress free. Back-stitch to reinforce.

22. Close zipper and check that it is invisible from the OUTSIDE. Pull the free ends of the zipper tape away from the seam allowance. Pin remaining center back seam together below zipper. Position zipper foot all the way to the LEFT so the needle goes down through the outer notch of the foot. Start stitching seam 1/4" (6mm) above lowest stitch and slightly to the LEFT. Stitch seam for about 3" (7.5cm). Stitch remainder of seam using your regular presser foot.

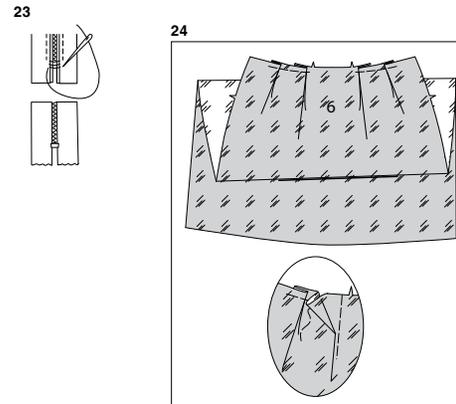


23. If the zipper is longer than the opening, using a strong thread, hand-sew a few small stitches across ends of coils at end of opening. Trim away lower end of zipper tape to within 5/8" (1.5cm) of hand-stitches.

24. To make pleats in skirt front LINING (6), on OUTSIDE, crease along solid lines. Bring creases to broken lines. Pin. Baste across upper edge. Press.

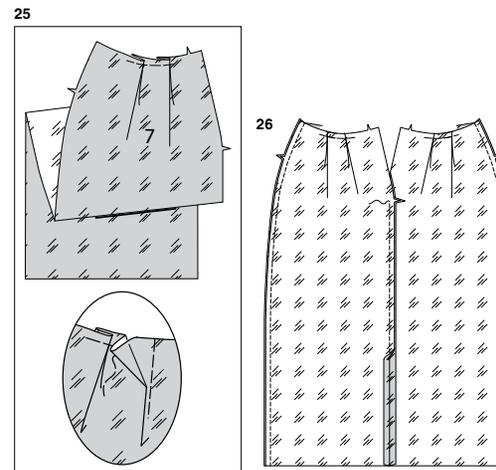


25. To make pleats in skirt back LINING (7), on OUTSIDE, crease along solid lines. Bring creases to broken lines. Pin. Baste across upper edge. Press.


26. Stitch skirt back lining sections together at center back seam, leaving open above notch. Stitch skirt front lining to skirt back lining at sides.

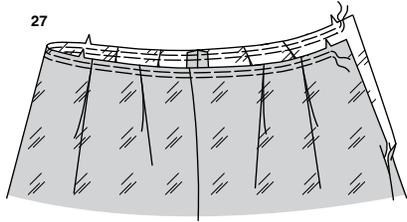

27. GATHER upper edge of skirt lining between back notches.

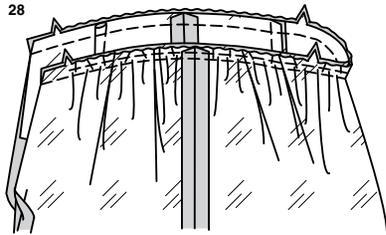

28. Open out bodice lining. With RIGHT sides together, pin skirt lining to bodice lining, matching centers and side seams. Adjust gathers; baste. Stitch. Press seam toward bodice lining.

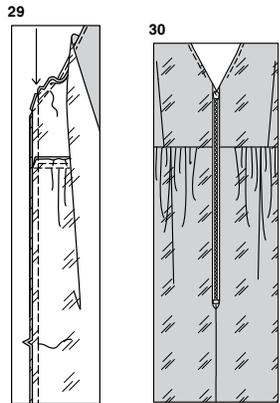

29. Open out back opening edges of dress, rolling the zipper teeth away from the opening edge. With RIGHT sides together, pin lining to dress, matching centers; pin back opening edges together. Stitch remainder of upper edges, connecting with previous stitching. Using an adjustable zipper foot, stitch 1/2" (1.3cm) from back edges, keeping zipper teeth free. Do not trim back edges.


30. Turn lining to INSIDE, rolling zipper teeth back in place; press.

FINISHING


31. With RIGHT sides together, fold KNOT (10) in half lengthwise. Stitch notched edge.

32. Turn knot RIGHT side out, bringing stitching to center.


33. Fold knot in half with raw edges even and seam on inside. Pin knot to lower bodice at center front. Stitch securely in place.

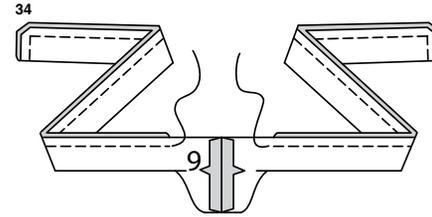


34. Stitch BOW (9) sections together at notched end. With RIGHT sides together, fold bow in half lengthwise. Stitch, leaving an opening for turning. Trim seam. Clip corners.

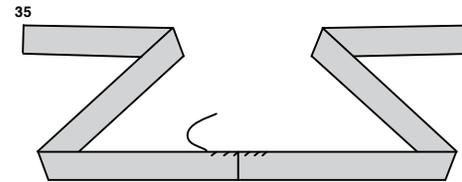



35. Turn bow RIGHT side out. Press. SLIPSTITCH opening closed.

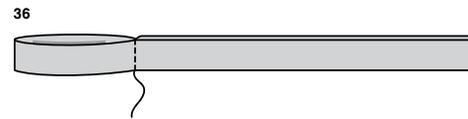


36. Fold bow in half, bringing stitching lines together. Stitch along stitching line.



37. Fold bow along foldlines bringing stitching to center seamline. Stitch along seam through all layers.

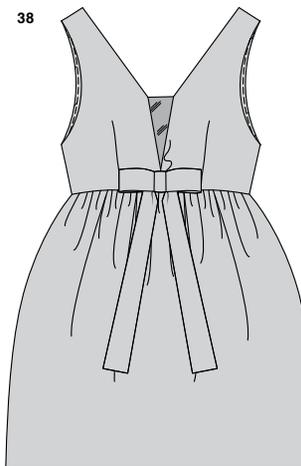

39. Make NARROW HEM at lower edge of lining.



40. Turn up 1 1/4" (3.2cm) hem on lower edge of dress. Baste close to fold. FINISH raw edge. CATCHSTITCH hem in place. Press.



Congrats!

You've completed your sewing adventure

SHARE YOUR LOOK



Post your pattern and tag us using [#simplicitypatterns](#)
[@simplicity creative group](#)
[@simplicitymccallsuk](#)
[@simplicitymccallsaustralia](#)
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](#) or for customers outside the U.S. and Canada visit [sewdirect.com](#) and [sewdirect.com.au](#)

Have a question or need help with your sewing project contact us:
[Simplicity.com](#) [Sewdirect.com](#) [Sewdirect.com.au](#)



Simplicity ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA [www.thedesigngroup.com](#) • All Rights Reserved. [www.simplicity.com](#) • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.