

S3081

Simplicity®

easy-to-sew



A



B



C



D

Designed and printed in USA.



Easy

TODDLERS' JACKETS AND PANTS

Suggested Fabrics: A,B,C,D: Denim, Light to Medium weight Canvas, Twill. **Interfacing:** Lightweight Fusible.

Notions: A,B: Six ¾" (2cm) buttons, contrast thread. **C,D:** ¾" (2.2cm) elastic: ¾ yd. (0.7m) for C, 1½ yds. (1.6m) for D.

Sizes	½	1	2	3	4
-------	---	---	---	---	---

BODY MEASUREMENTS: Select pattern size based on body measurements

	½	1	2	3	4	Ins.
Chest	19	20	21	22	23	
Waist	19	19½	20	20½	21	"
Hip	28	31	34	37	40	"
Approx. Height	26½	31	35	38	41	"

Jacket A	45**	1	1	1	1½	1½	Yds.
	60**	¾	¾	¾	¾	¾	"

Interfacing 20" - ¾ yd.

Jacket B	45**	1	1	1½	1½	1½	Yds.
	60**	¾	¾	¾	¾	¾	"

Interfacing 20" - ¾ yd.

Pants C	45**	¾	¾	1	1	1	Yds.
	60**	¾	¾	¾	¾	¾	"

Interfacing 20" - ¼ yd.

Pants D	45**	¾	¾	1	1	1	Yds.
	60**	¾	¾	¾	¾	¾	"

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

	½	1	2	3	4	Ins.
Width, each leg						
Pants C	11¾	12¾	13	13¾	14¾	
Finished back length from base of neck						
Jacket A,B	12½	13½	14½	15½	16½	
Finished side length from waist						
Pants C,D	14½	16	17½	19	20½	

*with nap **without nap

Facile

VESTES ET PANTALONS POUR PETITS ENFANTS

Tissus Conseillés: A,B,C,D: Denim, Canevas de poids léger à moyen, Twill. **Entoilage:** Thermocollant léger.

Merci: A,B: 6 boutons de 2cm, fil de contraste. **C,D:** Élastique de 2.2cm: ___ m pour C, ___ m pour D.

Tailles	½	1	2	3	4
---------	---	---	---	---	---

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

	½	1	2	3	4	cm
Poitrine	48	51	53	56	58	
Taille	48	50	51	52	53	"
Hanches	71	79	86	94	102	"
Taille approx.	67	79	89	97	104	"

Veste A	115cm*	0.9	0.9	0.9	1.0	1.0	m
	150cm*	0.7	0.8	0.8	0.8	0.8	"

Entoilage 51cm - 0.7m

Veste B	115cm*	0.9	0.9	1.0	1.0	1.1	m
	150cm*	0.7	0.8	0.8	0.8	0.8	"

Entoilage 51cm - 0.6m

Pantalon C	115cm*	0.7	0.8	0.8	0.9	0.9	m
	150cm*	0.6	0.7	0.7	0.7	0.8	"

Entoilage 51cm 0.2m

Pantalon D	115cm*	0.7	0.8	0.8	0.9	0.9	m
	150cm*	0.6	0.7	0.7	0.7	0.8	"


MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

	½	1	2	3	4	cm
Largueur, chaque jambe						
Pantalon C	30	31	33	35	36	
Longueur finie – dos, votre nuque à l'ourlet						
Veste A,B	32	34	37	39	42	
Longueur finie – côté, taille à l'ourlet						
Pantalon C,D	37	41	44	48	52	

*avec sens **sans sens



A,B




C




D

Simplicity®

Thank you for purchasing this Simplicity pattern.
We made every effort to provide you with a high quality product.

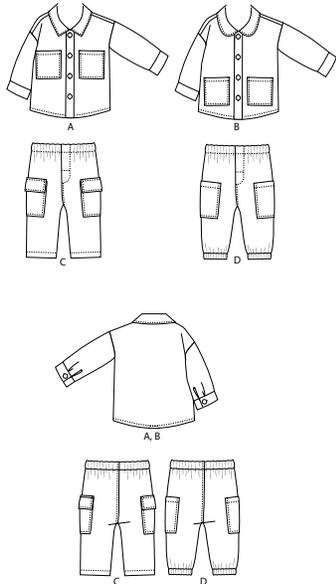

15 PIECES

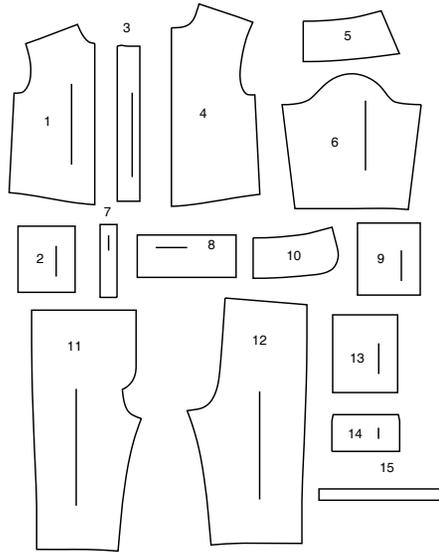

- 1 FRONT - A,B
- 2 POCKET - A
- 3 PLACKET - A,B
- 4 BACK - A,B
- 5 COLLAR - A
- 6 SLEEVE - A,B
- 7 CONTINUOUS LAP - A,B
- 8 CUFF - A,B
- 9 POCKET - B
- 10 COLLAR - B
- 11 FRONT - C,D
- 12 BACK C,D
- 13 POCKET - C,D
- 14 FLAP - C
- 15 ELASTIC GUIDE FOR LEG - D

General Directions

The Pattern

- SYMBOLS**
- GRAIN LINE Place on straight grain of fabric parallel to selvage
 - PLACE SOLID LINE on fold of fabric.
 - CENTER FRONT OR BACK of garment.
 - NOTCHES
 - DOTS
 - CUTTING LINE
 - LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED

Make adjustments before placing pattern on fabric.

TO LENGTHEN:
Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

TO SHORTEN:
At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING:
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.

PIN pattern to fabric as shown in Cutting Layouts.

• FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.


• FOR SINGLE THICKNESS: Place fabric RIGHT side up.

• FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING:
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.




Sewing

- SEW garment following Sewing Directions.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.

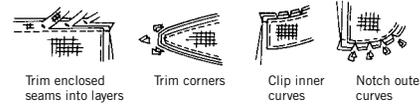


SPECIAL CUTTING NOTES


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.



Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.




✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).



Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE


JACKET A

USE PIECES 1 2 3 4 5 6 7 8

45" (115CM) WITH NAP ALL SIZES




60" (150CM) WITH NAP ALL SIZES



INTERFACING A

USE PIECES 3 5 8


20" (51CM) ALL SIZES




JACKET B

USE PIECES 1 3 4 6 7 8 9 10

45" (115CM) WITH NAP ALL SIZES




60" (150CM) WITH NAP ALL SIZES



INTERFACING B

USE PIECES 3 8 10


20" (51CM) ALL SIZES




PANTS C

USE PIECES 11 12 13 14

45" (115CM) WITH NAP ALL SIZES




60" (150CM) WITH NAP ALL SIZES



INTERFACING

USE PIECE 14

20" (51CM) ALL SIZES




PANTS D


USE PIECES 11 12 13

CUT TWO OF PIECE 15 FROM ELASTIC

45" (115CM) WITH NAP ALL SIZES






60" (150CM) WITH NAP ALL SIZES



SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials

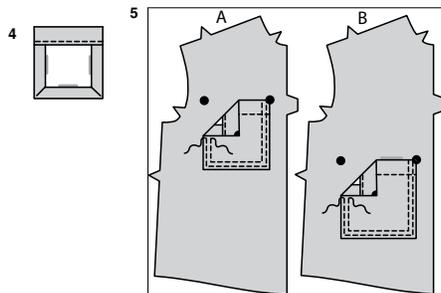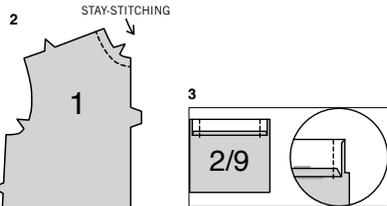

Sewing Directions

FABRIC KEY RIGHT SIDE WRONG SIDE INTERFACING LINING LINING

Read **General Directions** on page 1 before you begin.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

EDGE STITCH – See **Machine Stitches**: “how to sew an edgestitch” video.

SET IN SLEEVE – See **Armholes/Sleeves**: “sewing a set in sleeve” video.

SLIPSTITCH – See **Hand Stitching**: “how to slip stitch” video.

STAYSTITCH – See **Machine Stitches**: “how to do stay stitching” video.

STITCH IN THE DITCH – See **Machine Stitches**: “how to stitch in the ditch” video.

TOPSTITCH – See **Machine Stitches**: “how to topstitch” video.

TRIM SEAM – See **Seams**: “how to trim, clip and layer seams” video.

UNDERSTITCH – See **Machine Stitches**: “how to understitch” video.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH 5/8" (1.5CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.







JACKET A, B

INTERFACING

1. Pin interfacing to **WRONG** side of **PLACKET** (3), **CUFF** (8), and **COLLAR** (5) for View A, or **COLLAR** (10) for View B. Fuse in place following manufacturer's directions.

FRONT AND BACK

2. To **STAYSTITCH** neck edge of **FRONT** (1), Stitch 1/2" (1.3cm) from cut edge in direction of arrows. This stitching stays in permanently to prevent stretching on curved edges. (Shown only in the first illustration.)
3. Press under 1/4" (6mm) on upper edge of **POCKET** (2) for View A, or **POCKET** (9) for View B. Turn upper edge to **OUTSIDE** along fold line, forming facing. Stitch along seam line on raw edges. Trim seam allowance in the facing area to 1/4" (6mm).
4. Turn corners **RIGHT** side out, turning facing to the **WRONG** side; press, pressing under raw edges along stitching. Stitch facing close to inner edge.
5. On **OUTSIDE**, pin pocket to front matching large dots. **EDGE STITCH** close to side and lower edges and **TOPSTITCH** 1/4" (6mm) away.

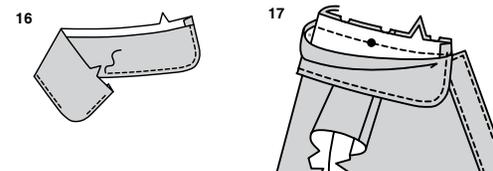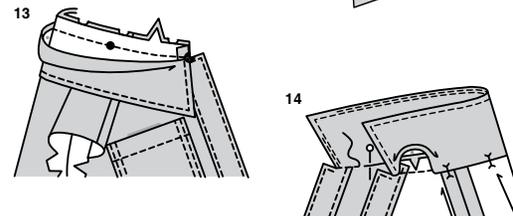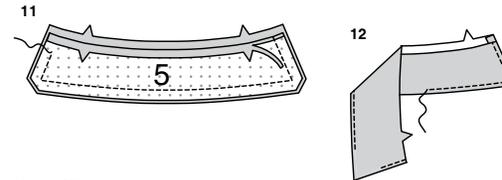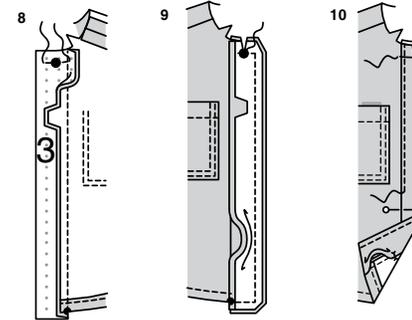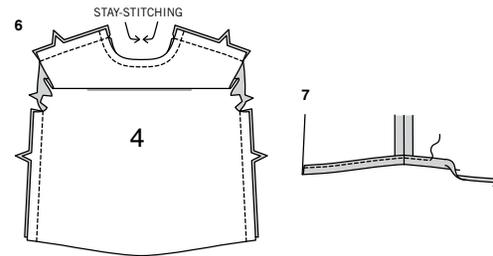

6. To **STAYSTITCH** neck edge of **BACK** (4). Stitch 1/2" (1.3cm) from cut edge in direction of arrows. Stitch front to back at shoulder and side edges.

7. Press up 7/8" (2.2cm) hem allowance, turn under raw edge 1/4" (6mm). Stitch hem in place close to inner pressed edge.

8. To reinforce **PLACKET** (3) at the large dot. Stitch along seamline 1/2" (1.3cm) each side of the large dot. With **RIGHT** sides together and raw edges even, pin placket to front, matching small dots and notches. Stitch in a 3/8" (1cm) seam. **TRIM SEAM**. Press seam toward placket, pressing placket out.

9. Reinforce placket facing in the same manner as placket. Press under a generous 1/4" (6mm) on notched edge of facing. On **OUTSIDE**, pin facing to placket, matching centers, small and large dots. Stitch front and lower edge in a 3/8" (1cm) seam. Stitch 5/8" (1.5cm) from upper edge from front edge to large dot, back-stitching at dot to reinforce the seam. Clip seam allowance to stitching at the large dot. **TRIM SEAM**.

10. Turn facing to **INSIDE**; press, pressing out front corner. On **INSIDE**, pin pressed edge of facing over seam, placing pins on **OUTSIDE**. On **OUTSIDE**, **EDGE STITCH** placket close to seam, catching in placket facing on the **INSIDE**. **EDGE STITCH** placket close to front and finished neck edge. Baste raw edges together.

COLLAR A

11. Press under 1/2" (1.3cm) on notched edge of interfaced **COLLAR** (5). Trim to 1/4" (6mm). With **RIGHT** sides together and raw edges even, pin facing to collar, leaving notched edge open. Stitch side and lower edges. **TRIM SEAM**.

12. Turn collar; press. **UNDERSTITCH** the collar facing. On **OUTSIDE**, **TOPSTITCH** collar 1/4" (6mm) from finished edge.

13. Clip neck edge of shirt to staystitching along curves. On **OUTSIDE**, pin collar (facing side) to neck edge, matching centers, large dots, small dots, and notches. Stitch facing, keeping collar free.

14. Turn collar to **INSIDE**, turning seam allowance toward collar; press. Stitch pressed edge of collar over neck seam, placing pins on **OUTSIDE**. On **OUTSIDE**, **STITCH IN THE DITCH** of the seam, catching in pressed edge of collar on the **INSIDE**.

COLLAR B


15. Press under 1/2" (1.3cm) on notched edge of interfaced **COLLAR** (10). Trim to 1/4" (6mm). With **RIGHT** sides together and raw edges even, pin facing to collar, leaving notched edge open. Stitch side and lower edges. **TRIM SEAM**.

16. Turn collar; press. **UNDERSTITCH** the collar facing. On **OUTSIDE**, **TOPSTITCH** collar 1/4" (6mm) from finished edge.


17. Clip neck edge of shirt to staystitching along curves. On **OUTSIDE**, pin collar (facing side) to neck edge, matching centers, large dots, and notches. Stitch facing, keeping collar free.

S3081

3 of 4





18. Turn collar to **INSIDE**, turning seam allowance toward collar; press. Pin pressed edge of collar over neck seam, placing pins on **OUTSIDE**. On **OUTSIDE**, **STITCH IN THE DITCH** of the seam, catching in pressed edge of collar on the **INSIDE**.

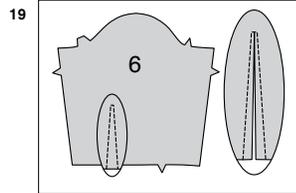

CONTINUE AS FOLLOWS FOR BOTH VIEWS



19. To make slash opening at lower edge of **SLEEVE (6)**, stitch along stitching lines. Pivot and take one small stitch across the point. Slash between stitching, being careful not to slash through the stitch at the point.

20. Stitch along stitching line on **CONTINUOUS LAP (7)**.

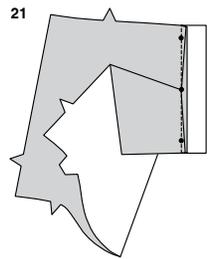



21. Spread slashed edges of sleeve apart, forming a straight line. Baste **RIGHT** side of lap to **WRONG** side of slashed edges, matching stitching lines and small dots. Stitch along stitching line.

22. Press lap out, pressing seam toward lap. Press under 1/4" (6mm) on remaining long edge of lap. Stitch pressed edge over seam.

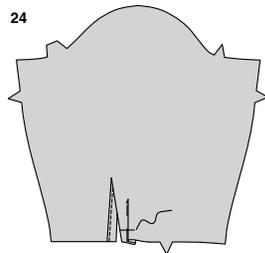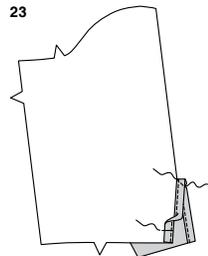


23. Press front portion of lap to **INSIDE**; baste in place across lower edge. Stitch across upper edge of fold diagonally, as shown.

24. To make soft pleat, on **OUTSIDE**, fold along solid lines. Bring folds to broken lines; pin. Baste across lower edge.


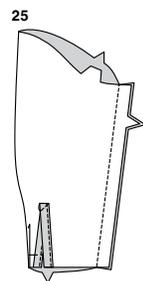


25. Stitch underarm edges of sleeve with **RIGHT** sides together.

26. Press under 1/2" (1.3cm) on unnotched edge of **CUFF (8)**. Trim to 1/4" (6mm). With **RIGHT** sides together, pin sleeve to cuff, placing opening edges at small dots. Stitch. **TRIM SEAM**. Press seam toward cuff, pressing cuff out.




27. Fold cuff along foldline with **RIGHT** sides together. Stitch ends. **TRIM SEAM**(s).




28. Turn cuff; press. On **INSIDE**, pin pressed edge of cuff over seam, placing pins on **OUTSIDE**. On **OUTSIDE**, **STITCH IN THE DITCH** of the seam, catching in pressed edge of facing on the **INSIDE**.

29. Make buttonhole on cuff at marking. Sew button to cuff at small dot.




30. To **SET IN SLEEVE**, turn sleeve **RIGHT** side out. Hold jacket **WRONG** side out with armhole toward you. With **RIGHT** sides together, pin sleeve to armhole edge, matching underarm seams, notches, and small dots. Baste. Stitch. Stitch again 1/8" (3mm) from first stitching. Trim seam below notches close to stitching. Press only the seam allowance, shrinking out fullness.

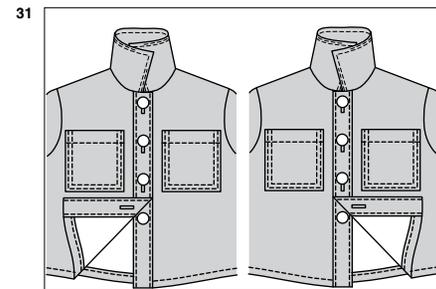

FINISHING

31. Make buttonholes on **RIGHT** placket at markings (to style for girl) or **LEFT** placket at markings (to style for boy). Lap plackets, matching centers. Sew buttons under buttonholes.





PANTS C, D

INTERFACING VIEW C

1. Pin interfacing to **WRONG** side of **FLAP (14)**. Fuse in place following manufacturer's directions.



CONTINUE AS FOLLOWS FOR BOTH VIEWS

2. Stitch **FRONT (11)** to **BACK (12)** at side edges.




3. Press under 1/4" (6mm) on upper edge of **POCKET (13)**. Turn upper edge to **OUTSIDE** along fold line, forming facing. Stitch along seam line on raw edges. Trim seam allowance in the facing area to 1/4" (6mm).

4. Turn corners **RIGHT** side out, turning facing to the **WRONG** side; press, pressing under raw edges along stitching. Stitch facing close to inner edge.

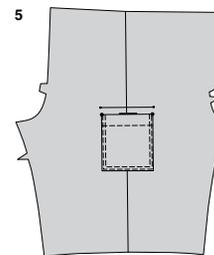


5. On **OUTSIDE**, pin pocket to front and back matching large dots. **EDGESTITCH** close to side and lower edges and **TOPSTITCH** 1/4" (6mm) away.

6. **FOR VIEW C** - With **RIGHT** sides together, stitch facing to **FLAP (14)**, leaving edge with small dots open. **TRIM SEAM**.




7. Turn flap; press. Machine-baste 5/8" (1.5cm) from raw edge. On **OUTSIDE**, **TOPSTITCH** 1/4" (6mm) from finished edge.

8

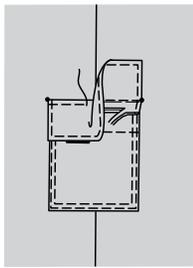

9

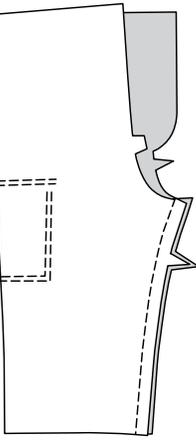


- 8.** On **OUTSIDE**, pin flap to front and back, placing basting along flap line, matching small dots, as shown. Stitch along basting. Trim close to stitching. Turn flap down; press. **TOPSTITCH** 1/4" (6mm) from upper edge.


CONTINUE AS FOLLOWS FOR BOTH VIEWS

- 9.** Stitch front to back along inner leg edges.

10

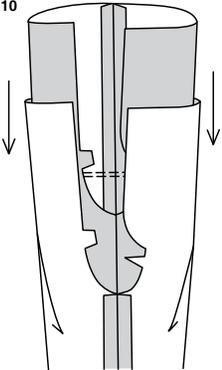


11

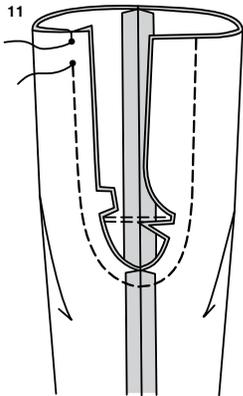

- 10.** With **RIGHT** sides together, insert one pant leg **INSIDE** the other.


- 11.** With **RIGHT** sides together, pin center seam, matching inner leg seams and notches. Stitch, leaving an opening between small dots on back edges. To reinforce the seam, stitch again over previous stitching. Press center back seam open.

12




- 12.** Press 1-3/8" (3.5cm) on upper edge to **INSIDE**, forming casing. Press under raw edge 1/4" (6mm). Stitch close to inner pressed edge. Clip seam allowance of **RIGHT** back below casing.

13




- 13.** Cut a piece of elastic to fit waist, plus 1" (2.5cm). Insert elastic through casing. Overlap ends and hold with a safety pin. Try on pants and adjust to fit.

14




15



- 14.** Stitch ends of elastic together securely.

- 15.** **SLIPSTITCH** opening closed. Distribute fullness evenly.


16

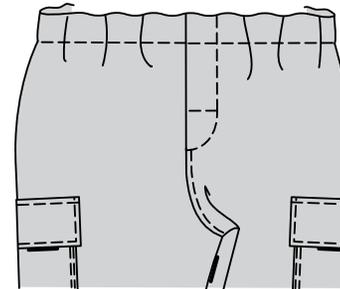

- 16.** Press pants, pressing center seam to **LEFT** side of pants. To form fly, on **OUTSIDE**, stitch along stitching lines on **LEFT** side of pants, as shown, and **TOPSTITCH** 1/4" (6mm) **LEFT** of finished center seam from upper back edge to "fly" stitching on front, through all thicknesses.


FINISHING

17




- 17.** **FOR VIEW C** – Press up 1-1/4" (3.2cm) hem allowance. Press under raw edge 1/4" (6mm). Stitch close to inner pressed edge.

18




19



- 18.** **FOR VIEW D** – Press 1-1/4" (3.2cm) on lower edge to **INSIDE**, forming casing. Press under raw edge 1/4" (6mm). Stitch close to inner pressed edge, leaving an opening to insert elastic.

- 19.** Cut a piece of elastic the length of the **ELASTIC GUIDE FOR LEG (15)**. Thread elastic through opening in casing. Overlap ends. Stitch ends of elastic together, securely.

20



- 20.** Stitch opening closed. Distribute fullness evenly.



Congrats!

You've completed your sewing adventure

SHARE YOUR LOOK



Post your pattern and tag us using [#simplicitypatterns](#)
[@simplicity creative group](#)
[@simplicitymccallsuk](#)
[@simplicitymccallsaustralia](#)
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](#) or for customers outside the U.S. and Canada visit [sewdirect.com](#) and [sewdirect.com.au](#)

Have a question or need help with your sewing project contact us:
[Simplicity.com](#) [Sewdirect.com](#) [Sewdirect.com.au](#)



Simplicity ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA [www.thedesigngroup.com](#) • All Rights Reserved. [www.simplicity.com](#) • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.