

S3089

Simplicity®



easy-to-SEW



Shop all the pattern brands you love @
Simplicity®.com

For customers outside of the U.S. and Canada
sewdirect.com
sewdirect.com.au

Very Easy

15" (38CM) PLUSH PETS


Suggested Fabrics: Fleece, Low Pile Faux Fur, Low Pile Sherpa, Minky Fleece. **Nose Appliqués**
A,D,E in Faux Leather, Faux Suede, Felt. **Interfacing:** Lightweight Fusible.

Notions: **A,B,C,D,E** Polyfiberfill, $\frac{1}{8}$ yd. (0.8m) of 1 $\frac{1}{2}$ " (4cm) ribbon, embroidery floss or
lightweight yarn (for nose B,C embroidery and mouth embroidery). **Also for A,C:** Two 12mm
safety eyes. **Also for B,D,E:** Two 9mm safety eyes.


Bear A

60** - $\frac{1}{8}$ yd. (150cm* - 0.6m)


Interfacing: 20" - 1 $\frac{1}{2}$ yds. (51cm - 1.0m)




A



B,C



D



E

Kitty B

60** - $\frac{1}{8}$ yd. (150cm* - 0.6m)

Interfacing: 20" - 1 $\frac{1}{2}$ yds. (51cm - 1.4m)

Muzzle Appliqué - 8 x 12" (20cm x 30cm) fabric remnant

Kitty C

60** - $\frac{1}{8}$ yd. (150cm* - 0.6m)

Interfacing: 20" - 1 $\frac{1}{2}$ yds. (51cm - 1.4m)

Puppy D

60** - $\frac{3}{8}$ yd. (150cm* - 0.7m)

Interfacing: 20" - 1 $\frac{1}{2}$ yds. (51cm - 1.4m)

Eye Patch Appliqué - 4" x 5" (10cm x 13cm) fabric remnant

Fox E

60** - $\frac{3}{8}$ yd. (150cm* - 0.6m)

Interfacing: 20" - 1 $\frac{1}{2}$ yds. (51cm - 1.5m)

Muzzle and Tail Tip Appliqués - 9" x 12" (23cm x 30cm) fabric remnant





Mitts and Boots Appliqués - 9" x 12" (23cm x 30cm) fabric remnant

*with nap **without nap


1 / 5

Simplicity® S3089

Thank you for purchasing this Simplicity pattern.
We made every effort to provide you with a high quality product.




13 PIECES

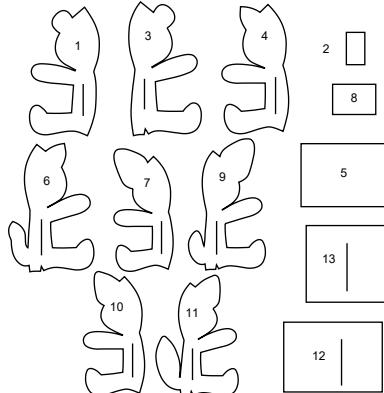

- 1 FRONT - A
- 2 NOSE APPLIQUE - A,D,E
- 3 BACK - A
- 4 FRONT - B,C
- 5 MUZZLE APPLIQUE - B
- 6 BACK - B,C
- 7 FRONT - D
- 8 EYE PATCH APPLIQUE - D
- 9 BACK - D
- 10 FRONT - E
- 11 BACK - E
- 12 MUZZLE AND TAIL TIP APPLIQUE - E
- 13 MITTS AND BOOTS APPLIQUE - E

Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

General Directions For Cutting

PRE-SHRINK and iron all fabric.

FOR DOUBLE THICKNESS - Fold fabric with RIGHT sides together.

Pin pattern to WRONG side of fabric.

FOR SINGLE THICKNESS - Pin pattern to RIGHT side of fabric.

★ If layout shows a piece extending past fold, cut out all pieces except piece that extends. Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.

★ Mark small arrows along both selvages in dictating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold. Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together.

BEAR A

USE PIECES 1 3

60" (150CM)
WITH NAP




SELVAGES
FOLD

INTERFACING A

USE PIECES 1 3

20" (51CM)

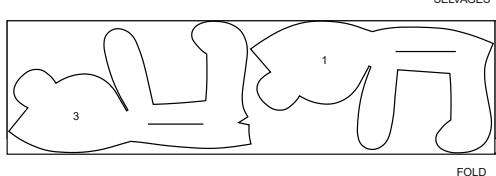

SELVAGES
FOLD

NOSE APPLIQUE A

CUT ONE OF PIECE 2 FROM REMNANT.

KITTY B,C

USE PIECES 4 6

60" (150CM)
WITH NAP




SELVAGES
FOLD

INTERFACING B,C

USE PIECES 4 6

20" (51CM)

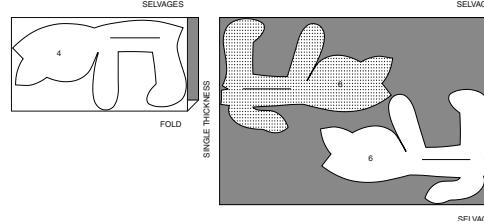

SELVAGES
FOLD
SINGLE THICKNESS
SELVAGE

MUZZLE APPLIQUE B

CUT ONE OF PIECE 5 FROM REMNANT.

PUPPY D

USE PIECES 7 9

60" (150CM)
WITH NAP




FOLD

INTERFACING D

USE PIECES 7 9

20" (51CM)

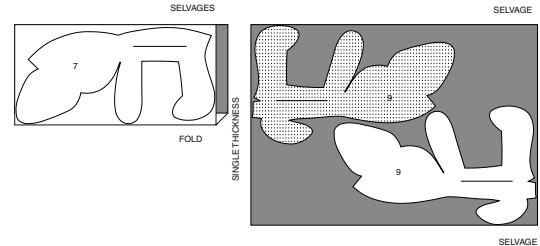

SELVAGE

EYE PATCH APPLIQUES D

CUT ONE OF PIECE 8 FROM REMNANT.


NOSE APPLIQUE D

CUT ONE OF PIECE 2 FROM REMNANT.

FOX E

USE PIECES 10 11

60" (150CM)
WITH NAP




FOLD

INTERFACING E

USE PIECES 10 11

20" (51CM)

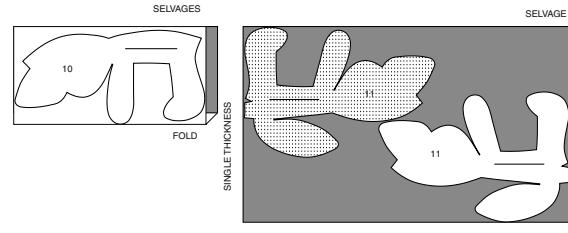

SELVAGE

NOSE APPLIQUE E

CUT ONE OF PIECE 2 FROM REMNANT.

MUZZLE AND TAIL TIP, MITTS AND BOOTS APPLIQUES E


CUT ONE OF PIECE 12 AND TWO OF PIECE 13 FROM REMNANT.

Sewing Directions


FABRIC 

GLOSSARY


Methods shown in **ITALICS** are defined below:




DART SEAM




SAFETY EYES

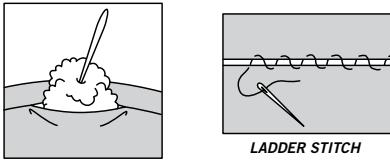

STUFF



OUTLINE STITCH

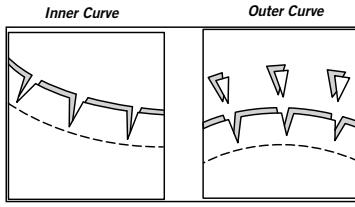

CLIP CURVES

DART SEAM - To stitch dart seam, with **RIGHT** sides together, bring broken lines together carefully matching small dots. On **INSIDE**, place pins at **RIGHT** angles to the broken lines. Stitch the dart seam from outer edge to the point. Press the dart seam flat along the stitching to "blend" the stitches, then press dart as indicated in the Sewing Directions.

SAFETY EYES - Before stitching seams, reinforce eye areas so that the plastic eyes don't pull through the fabric. Cut 1" (2.5cm) circles from remnants of fusible interfacing. Fuse circles to **WRONG** side of head underneath small dots for eyes, following manufacturer's directions.

To attach each eye, using a sharp pointed object or an awl, poke a hole at small dots. Insert the eye shank through the opening from **OUTSIDE** and on **INSIDE** secure in place with washer making sure it is on securely.

STUFF - Pull fiberfill apart and fluff it before you use it. Break apart the lumps and thick spots. This will help to create a smoother looking project.

Use pieces about the size of a tennis ball. Pack into place using the end of a long handled wooden spoon or chop-stick. Use small pieces and pack into place using the end of a crochet hook or chop-stick. Pack firmly in place each time stuffing is added. Use both hands to mold and shape, being careful not to over stuff or make lopsided.

LADDER STITCH - Using a strong thread, take a small stitch in one edge close to seam. Then take a small stitch in the other edge close to seam. Pull up thread after each stitch to bring edges together. Continue to alternate from edge to edge with the smallest hand-stitches possible. Knot thread securely at end of stitching.

OUTLINE STITCH - For outline stitching, work with as many threads as desired and use a large eyed needle. Bring thread to **RIGHT** side at A, down at B, up at C, etc. Always hold thread in the same position either all above or all below the needle for an even line.

CLIP CURVES - to make seams lie flat.

Inner Curve - Make little clips, or snips, in the seam allowance just to, but not through, the stitching.

Outer Curve - Cut little wedge-shaped notches from seam allowance.

INTERFACING - Pin interfacing to **WRONG** side of fabric. Fuse interfacing in place following manufacturer's directions.

SIMPLY THE BEST TECHNIQUES FOR SEWING FLEECE

- Fleece fabric is strong, hard to puncture or tear and doesn't ravel or get pilly.
- When pinning pieces together, use long pins...the kind with bead heads are best because short pins tend to get lost in the fleece.
- When stitching, try using a narrow zig-zag stitch, adjusting the width and length for the type of fleece you are using. Always test first on some scraps and keep for reference.
- Sew slowly and carefully the first time you stitch a seam as stitches are hard to remove.
- When sewing around shaped areas sew slowly, being careful not to stretch the fleece as you feed fabric through your machine.

- Finger press or steam press on a low temperature setting using a press cloth.
- Raw edges can also be cut with pinking shears.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH 1/4" (6MM) SEAMS, WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.





BEAR A

FRONT AND BACK

1. Apply **INTERFACING** to **FRONT** (1). With **RIGHT** sides together, pin front sections together at center front seam, matching notches, as shown. **STITCH**. **CLIP CURVES**.

2. On **OUTSIDE**, apply **SAFETY EYES** to front head at small dots, following manufacturer's instructions.

3. Place **NOSE APPLIQUE** (2) (View A) on front head within marking and sew or glue in place. **OUTLINE STITCH** along lines for mouth.





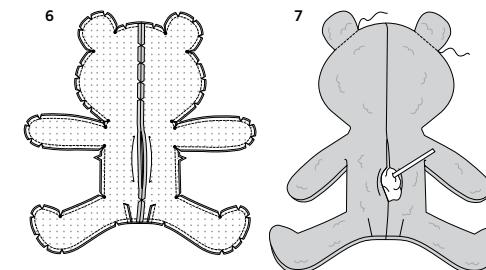
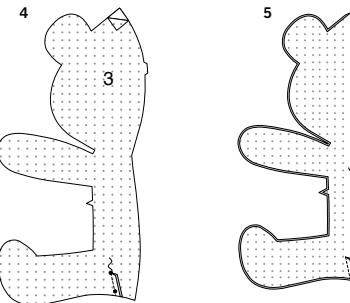

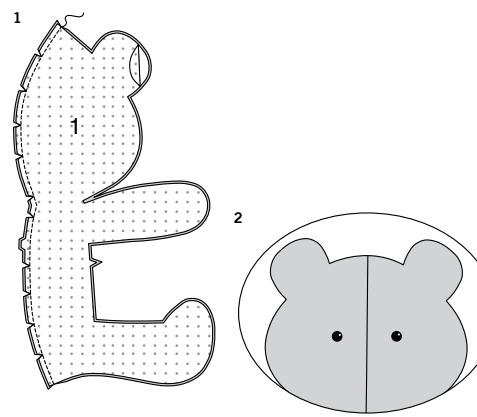


4. Apply **INTERFACING** to **BACK** (3). **STITCH DART SEAM** in back.

5. With **RIGHT** sides together, pin back sections together at center back seam, matching small dots and notches, as shown. **STITCH**, leaving open between small dots. **CLIP CURVES**.

6. With **RIGHT** sides together pin front section to back section, matching small dots, having raw edges even. **STITCH** outer edges, pivoting at small dots at inner corners. **CLIP CURVES** and to small dots at inner corners, as shown.

7. Turn **RIGHT** side out. **STUFF** plush firmly, lightly stuffing ears, leg joints and arm joints to allow for easy movement. **STITCH** ears along stitching lines.

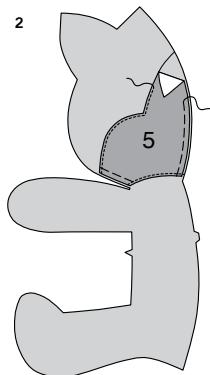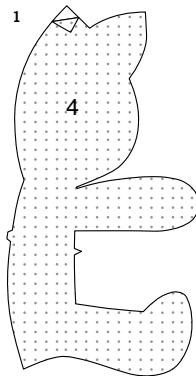

8. LADDER STITCH opening closed.

9. Cut a piece of ribbon approximately 30"(76cm) long. Wrap ribbon around neck and tie in a bow. Cut ends of ribbon into a "V" shape.

KITTY B, C

FRONT AND BACK

1. Apply **INTERFACING** to FRONT (4).

FOR VIEW B-

2. Pin MUZZLE APPLIQUE (5) to head front within markings. Stitch close to inner edges. Baste raw edges.








FOR VIEWS B, C-

3. With RIGHT sides together, pin front sections together at center front seam, matching notches, as shown. Stitch. **CLIP CURVES**.

4. On OUTSIDE, apply **SAFETY EYES** to front head at small dots, following manufacturer's instructions.

5. OUTLINE STITCH along lines for nose and mouth.

6. Apply **INTERFACING** to BACK (6). Stitch **DART SEAM** in back.

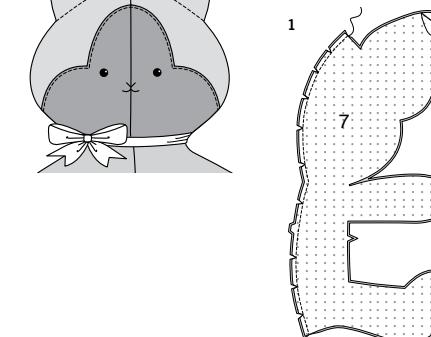

7. With RIGHT sides together, pin back sections together at center back seam, matching small dots and notches, as shown. Stitch, leaving open between small dots. **CLIP CURVES** and to small dot at inner corner, as shown.

8. With RIGHT sides together pin front section to back section, matching small dots, having raw edges even. Stitch outer edges, pivoting at small dots at inner corners. **CLIP CURVES** and to small dots at inner corners, as shown.

9. Turn RIGHT side out. **STUFF** plush firmly, lightly stuffing ears, tail, leg joints, arm joints to allow for easy movement. Stitch ears along stitching lines.

10. LADDER STITCH opening closed.


11. Cut a piece of ribbon approximately 30"(76cm) long. Wrap ribbon around neck and tie in a bow. Cut ends of ribbon into a "V" shape.

PUPPY D



FRONT AND BACK

1. Apply **INTERFACING** to FRONT (7). With RIGHT sides together, pin front sections together at center front seam, matching notches, as shown. Stitch. **CLIP CURVES**.



2. Pin EYE PATCH APPLIQUE (8) sections to head front within markings, as shown. Stitch close to raw edges.

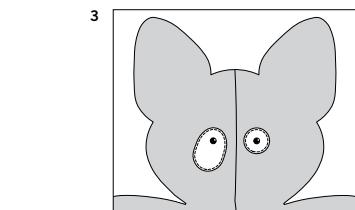



3. On OUTSIDE, apply **SAFETY EYES** to front head at inner small dots, following manufacturer's instructions.




4. Place NOSE APPLIQUE (2) (View D) on head front within marking and sew or glue in place. **OUTLINE STITCH** along lines for mouth.



5. Apply **INTERFACING** to BACK (9). Stitch **DART SEAM** in back.



6. With RIGHT sides together, pin back sections together at center back seam, matching small dots and notches, as shown. Stitch, leaving open between small dots. **CLIP CURVES** and to small dot at inner corner, as shown.




7. With RIGHT sides together pin front section to back section, matching small dots, having raw edges even. Stitch outer edges, pivoting at small dots at inner corners. **CLIP CURVES** and to small dots at inner corners, as shown.






8. Turn RIGHT side out. **STUFF** plush firmly, lightly stuffing tail, leg joints and arm joints to allow for easy movement. Stitch ears along stitching lines.

9. **LADDER STITCH** opening closed.

10. Fold ears toward front and tack tips of ears to front at small dots.



11. Cut a piece of ribbon approximately 30" (76cm) long. Wrap ribbon around neck and tie in a bow. Cut ends of ribbon into a "V" shape.

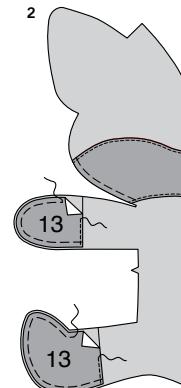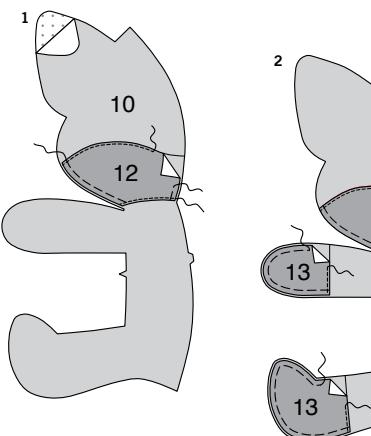

1. Apply **INTERFACING** to FRONT (10). Pin MUZZLE AND TAIL TIP APPLIQUE (12) (Muzzle) to head front within markings. Stitch close to inner edges. Baste raw edges. **NOTE:** Tail tip appliques will be used for back.


2. For each front section, pin one MITT AND BOOTS APPLIQUE (13) section to each arm and leg within markings, as shown. Stitch close to inner edges. Baste raw edges.

NOTE: Remaining mitt and boots appliques will be used for back.


3. With RIGHT sides together, pin front sections together at center front seam, matching notches, as shown. Stitch. **CLIP CURVES**.

4. On OUTSIDE, apply **SAFETY EYES** to front head at small dots, following manufacturer's instructions.

5. Place NOSE APPLIQUE (2) (View E) on head front within marking and sew or glue in place.

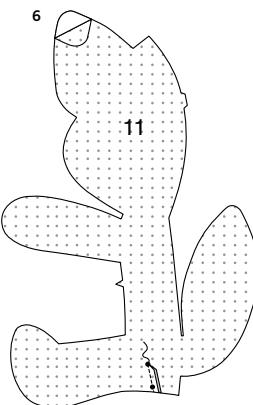

6. Apply **INTERFACING** to BACK (11). Stitch **DART SEAM** in back.

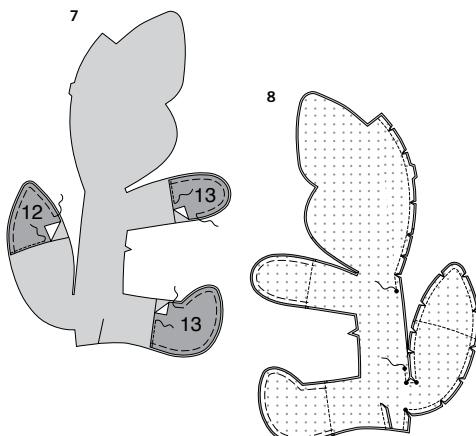


7. For each back section, pin one muzzle and tail tip applique (Tail Tip) to tail within marking. Stitch close to inner edge. Baste raw edges.


For each back section, pin one remaining mitt and boot applique section to arm and leg within markings. Stitch close to inner edges. Baste raw edges.

8. With **RIGHT** sides together, pin back sections together at center back seam, matching small dots and notches, as shown. Stitch, leaving open between small dots.


CLIP CURVES and to small dot at inner corner, as shown.

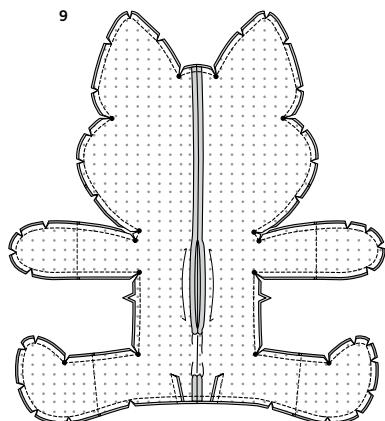

9. With **RIGHT** sides together pin front section to back section, matching small dots, having raw edges even. Stitch outer edges, pivoting at small dots at inner corners. **CLIP CURVES** and to small dots at inner corners, as shown.

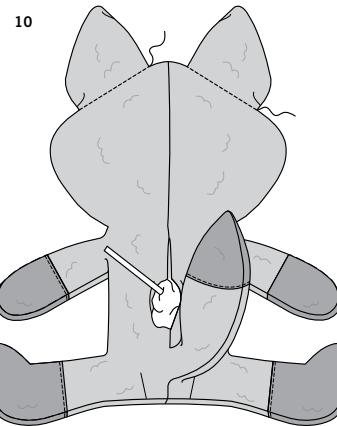

10. Turn **RIGHT** side out. **STUFF** plush firmly, lightly stuffing ears, tail, leg joints, arm joints to allow for easy movement. Stitch ears along stitching lines.

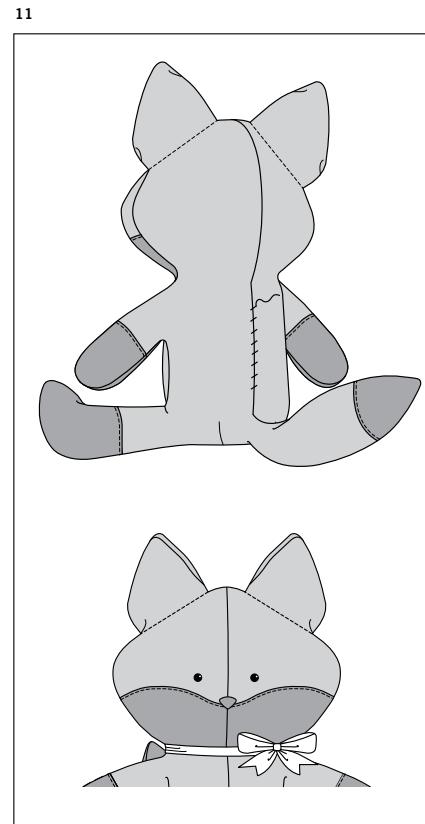

11. **LADDER STITCH** opening closed. Cut a piece of ribbon approximately 30"(76cm) long. Wrap ribbon around neck and tie in a bow. Cut ends of ribbon into a "V" shape.



Congrats!

You've completed your sewing adventure

SHARE YOUR LOOK



Post your pattern and tag us using [#simplicitypatterns](#)
[@simplicity_creative_group](#)
[@simplicitymccallsuk](#)
[@simplicitymccallsaustralia](#)

for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](#) or for customers outside the U.S. and Canada visit [sewdirect.com](#) and [sewdirect.com.au](#)

Have a question or need help with your sewing project contact us:

[Simplicity.com](#)

[Sewdirect.com](#)

[Sewdirect.com.au](#)



Simplicity ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA [www.thedesigngroup.com](#) • All Rights Reserved. [www.simplicity.com](#) • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.