

S9752

Simplicity

1 hourTM



A



B



C



D



easy-to-sew

*Sewing time only.



Designed and printed in USA.

Very Easy

Très Facile

WOMEN'S KNIT SKIRTS AND PANTS IN TWO LENGTHS

Suggested Fabrics: Stretch Knits only such as Jersey, Rib Knits, Spandex Blends. See Pick-A-Knit® Rule.

Notions: A, B, C, D: 1½ yd. (1.5m) of 1" (2.5cm) elastic.

Sizes	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
European	46	48	50	52	54	56	58	60	62	64

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	42	44	46	48	50	52	54	56	58	60	Ins.
Waist	35	37	39	41½	44	46½	49	51½	53	54½	"
Hip-9" below waist	44	46	48	50	52	54	56	58	60	62	"
Back-neck to waist	17¼	17%	17½	17%	17¾	17%	18	18%	18¼	18%	"

Skirt A	60**	1%	1%	2	2	2	2	2	2%	2%	2%	Yds.
Skirt B	60**	1%	1%	1%	1%	1%	2%	2%	2%	2%	2%	Yds.
Pants C	60**	2¼	2¼	2%	2%	2%	2¾	2¾	2¾	2¾	2¾	Yds.
Pants D	60**	2	2	2	2%	2%	2%	2%	2½	2½	2½	Yds.

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B,C,D Waist	35	37	39	41	43	45	47	49	51	53	Ins.
A,B,C,D Hip	44	46	48	50	52	54	56	58	60	62	"
Width, each leg											
Pants C	26½	27	27½	28	28½	29	29½	30	30½	31	Ins.
Pants D	24½	25	25½	26	26½	27	27½	28	28½	29	"
Width, lower edge											
Skirt B	44	46	48	50	52	54	56	58	60	62	Ins.
Finished back length from waist											
Skirt A	32	32	32	32	32	32	32	32	32	32	Ins.
Skirt B	42	42	42	42	42	42	42	42	42	42	"
Finished side length from waist											
Pants C	41¾	42	42¼	42½	42¾	43	43¼	43¾	43¾	44	Ins.
Pants D	36¾	37	37¼	37½	37¾	38	38¼	38¾	38¾	39	"

*with nap **without nap

JUPES ET PANTALON EN TRICOT EN DEUX LONGUEURS POUR FEMMES

Tissus Conseillés: Tricot extensibles seulement tels que Tricot Jersey, Tricot à côtes, Mélanges de spandex. Voyez la Règle-Pour-Choisir-Un-Tricot®.

Mercurie: A, B, C, D: 1.5m d'élastique de 2.5cm.

Tailles	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
Françaises	48	50	52	54	56	58	60	62	64	66
Européen	46	48	50	52	54	56	58	60	62	64

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	107	112	117	122	127	132	137	142	147	152	cm
Taille	89	94	99	105	112	118	124	131	134	138	"

Hanches (23cm au-dessous de la taille)

	112	117	122	127	132	137	142	147	152	157	cm
Dos du cou à la taille	44	44	44.5	45	45	45.5	46	46	46.5	47	"

Jupe A	150cm*	1.8	1.8	1.9	1.9	1.9	1.9	1.9	2.0	2.0	m	
Jupe B	150cm*	1.3	1.3	1.3	1.3	1.3	2.2	2.4	2.4	2.4	m	
Pantalón C	150cm*	2.1	2.1	2.2	2.4	2.4	2.6	2.6	2.6	2.6	m	
Pantalón D	150cm*	1.9	1.9	1.9	2.0	2.2	2.2	2.2	2.2	2.3	2.3	m

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B,C,D Taille	89	94	99	104	109	114	119	124	130	135	cm
A,B,C,D Hanches	112	117	122	127	132	137	142	147	152	157	"
Largeur, chaque jambe											
Pantalón C	67	69	70	71	72	74	75	76	77	79	cm
Pantalón D	62	64	65	66	67	69	70	71	72	74	"
Largeur à l'ourlet											
Jupe B	112	117	122	127	132	137	142	147	152	157	cm
Longueur finie – dos, taille à l'ourlet											
Jupe A	81	81	81	81	81	81	81	81	81	81	cm
Jupe B	107	107	107	107	107	107	107	107	107	107	"
Longueur finie – côté, taille à l'ourlet											
Pantalón C	106	107	107	108	109	109	110	110	111	112	cm
Pantalón D	93	94	95	95	96	97	97	98	98	99	"

*avec sens **sans sens



A



B



C



D

Use the 1 inch (2.54cm) box to ensure you are using rule at 100%

Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.

PICK-A-KNIT® RULE

FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE
POUR CE PATRON - LE JERSEY DOIT S'ÉTIRER DANS LA LARGEUR DE 4" (10 cm) DEPUIS ICI
PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO LARGO POR 4" (10 cm) DESDE AQUÍ






TO HERE 50%
JUSQUE LA 50%
HASTA ALLA 50%



When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.
Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

Simplicity®

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

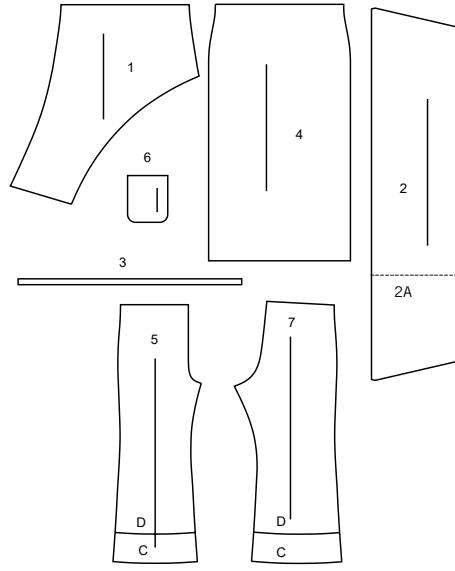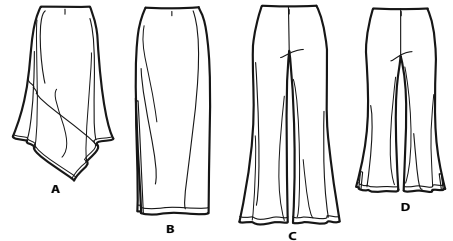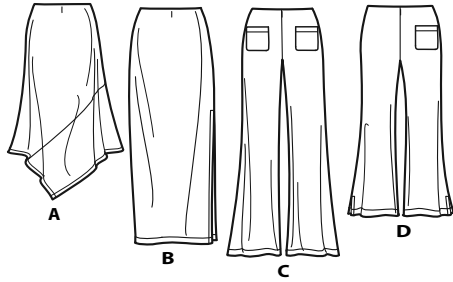

- 1 FRONT AND BACK - A
- 2 (2A) LEFT FRONT AND BACK - A
- 3 GUIDE FOR ELASTIC - A,B,C,D
- 4 FRONT AND BACK - B
- 5 FRONT - C,D
- 6 POCKET - C, D
- 7 BACK - C,D



General Directions

The Pattern

- SYMBOLS**
- GRAIN LINE: Place on straight grain of fabric parallel to selvage
 - PLACE SOLID LINE on fold of fabric.
 - CENTER FRONT OR BACK of garment.
 - NOTCHES
 - DOTS
 - CUTTING LINE
 - LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
Make adjustments before placing pattern on fabric.



When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING:
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.


CIRCLE your cutting layout.
PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING:
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.




Sewing

- SEW garment following Sewing Directions.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.




SPECIAL CUTTING NOTES


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.




✳ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).



Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

ALL VIEWS SIZED FOR STRETCH KNITS ONLY


A, B, C, D: PIECE 3 IS CUT OF ELASTIC

SKIRT A

NOTE: BEFORE CUTTING FABRIC, JOIN PIECES IN PARENTHESIS TO CORRESPONDING PIECES FOLLOWING INSTRUCTIONS ON TISSUE PATTERN.

USE PIECES 1 2 (2A)


60" (150CM) WITH NAP
ALL SIZES




SKIRT B

USE PIECE 4

60" (150CM) WITH NAP
SIZES 20W 22W 24W 26W 28W 30W




60" (150CM) WITH NAP
SIZES 32W 34W 36W 38W

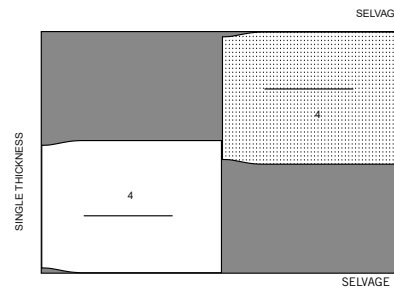


PANTS C

USE PIECES 5 6 7

60" (150CM) WITH NAP
SIZES 20W 22W 24W

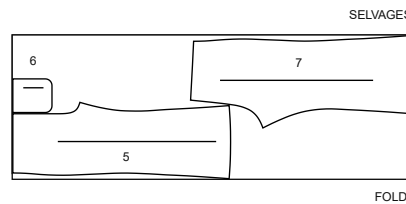

60" (150CM) WITH NAP
SIZES 26W 28W 30W 32W 34W 36W 38W

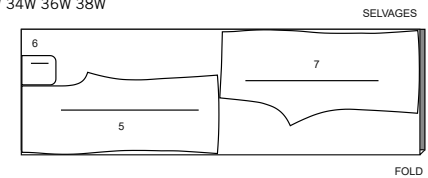


PANTS D


USE PIECES 5 6 7

CUT ONE OF PIECE 6

60" (150CM) WITH NAP
SIZES 20W 22W 24W 26W 28W

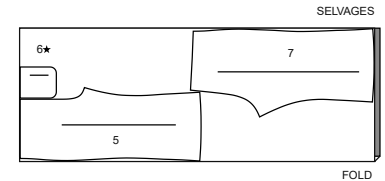

60" (150CM) WITH NAP
SIZES 30W 32W 34W 36W 38W

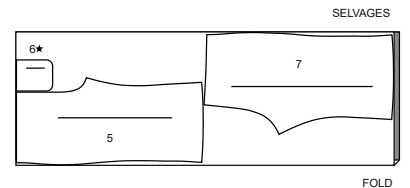


SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at [simplicity.com/sewingtutorials](https://www.simplicity.com/sewingtutorials)

FOR OVERLOCK/SERGER

- The Overlock/Serger can be used alone or as a supplement to your conventional sewing machine.
- Overlock sewing machines stitch, trim and finish all in one operation. Therefore, it is VERY important to Check Fit before stitching seams.
- Using matching color thread, baste seams and try garment on. If no adjustments are needed, overlock seams along basting.

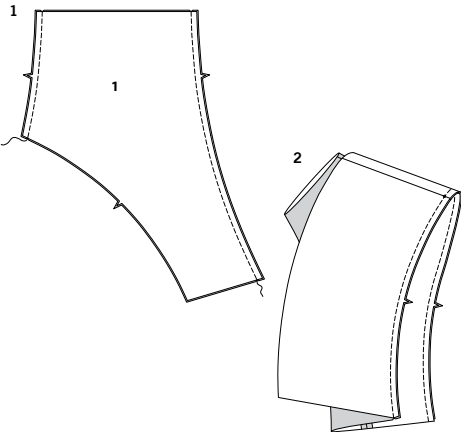

Sewing Directions

FABRIC KEY	RIGHT SIDE	WRONG SIDE	INTERFACING	LINING
------------	------------	------------	-------------	--------

Read **General Directions** on page 1 before you begin.

GLOSSARY OF SEWING METHODS

Sewing methods shown in *ITALICS* are defined below:

NARROW HEM- Press under hem allowance as indicated on tissue pattern. To form narrow hem, tuck under raw edge to meet crease. Press. Stitch hem in place.

SIMPLY THE BEST TECHNIQUES FOR SEWING KNITS

FOR KNITS


- Use a ball point or stretch needle.
- Narrow zig-zag stitch or a stretch stitch.
- To prevent shoulder seams from stretching, pin center of hem tape, clear elastic or twill tape along seam line on front shoulder edges, then stitch the shoulder seams.
- The three thread overlock is ideal for major seams such as shoulder, side, underarm and sleeve seams.
- For stress areas such as crotch seams and armholes, the four thread overlock/safety stitch is best...OR, use a three thread overlock, and stitch along seam with a conventional machine to reinforce.
- The two or three thread overlock stitch is a perfect finish for edges of facings, hems and seam allowances.

SKIRT A

FRONT AND BACK


1. Pin front and back (1) sections together at side seams, matching notches. Stitch.
2. Pin left front and back (2) to lower edge of front and back, matching notches, placing large dot at side seam. Stitch.

3

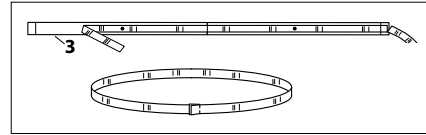


3. Cut a piece of elastic the length of guide for elastic (3). Transfer all markings with chalk or pencil. Stitch ends together at center back seam.

4




4. On **OUTSIDE**, pin elastic to skirt having upper edges even, matching centers, placing small dots at side seams. Stitch, stretching elastic to fit.

5



5. Turn elastic to **INSIDE**; press. To keep the elastic from rolling to **OUTSIDE**, secure it at the side seams by stitching in the ditch or groove of each seam.


6

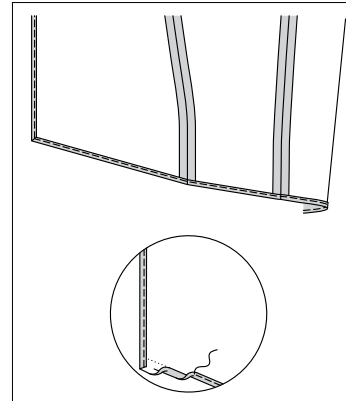




6. Make **NARROW HEM** at lower edges, diagonally folding corners, as shown.

SKIRT B

FRONT AND BACK

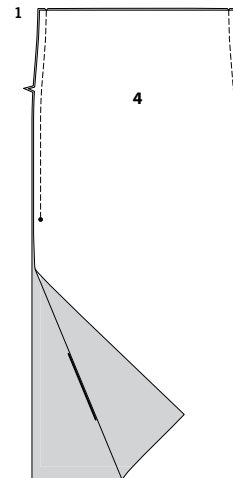

1. Pin front and back (4) sections together at side seams, matching notches. Stitch, leaving left side open below large dot.

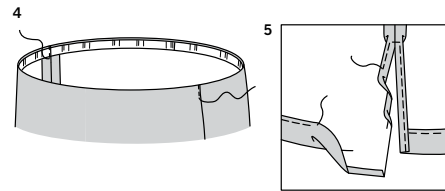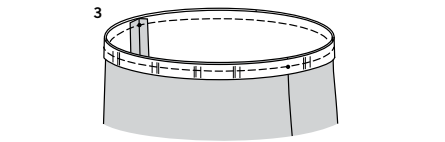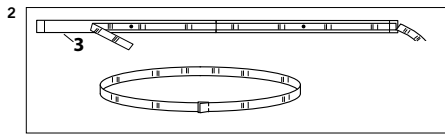

2. Cut a piece of elastic the length of guide for elastic. Transfer all markings with chalk or pencil. Stitch ends together at center back seam.

3. On **OUTSIDE**, pin elastic to skirt having upper edges even, matching centers, placing small dots at side seams. Stitch, stretching elastic to fit.

4. Turn elastic to **INSIDE**; press. To keep the elastic from rolling to **OUTSIDE**, secure it at the side seams by stitching in the ditch or groove of each seam.

5. Turn up 1 1/4" (3.2cm) hem on lower edge of skirt. Turn 1/4" (6mm) on raw edge of hem to wrong side; press. Stitch close to inner edge of hem. Make **NARROW HEM** at left opening edges, tapering to nothing above large dot, squaring stitching at opening.

PANTS C, D

FRONT AND BACK

1. Press under 1/4" (6mm) on upper edge of pocket (6). Turn upper edge to **OUTSIDE** along fold line, forming facing.

2. Stitch along seam line on raw edges. To ease curved edge of pocket, stitch 1/4" (6mm) **INSIDE** the seam line, using a long machine-stitch. Trim seam allowance in the facing area to 1/4" (6mm).

3. Turn corners **RIGHT** side out, turning facing to the **WRONG** side; press, pressing under raw edges along stitching. Pull up ease stitches to shape the curve. To eliminate bulk, notch out the fullness in the seam allowance along the curves as far as the ease stitches. Stitch facing close to inner edge.









FOR VIEW C

4. On **OUTSIDE**, pin pocket to each front (5) section, matching large dots. Stitch close to side and lower edges.

5. Stitch front to back (7) at side seam, matching notches.

FOR VIEW D

6. On **OUTSIDE**, pin pocket to left front section, matching large dots. Stitch close to side and lower edges.

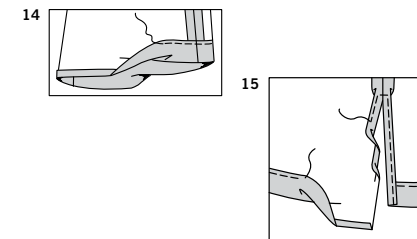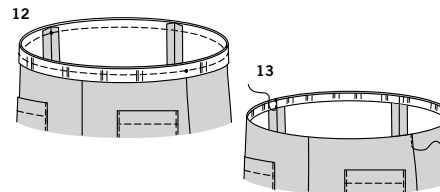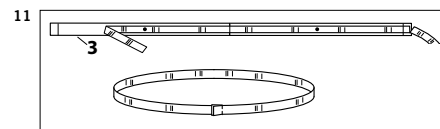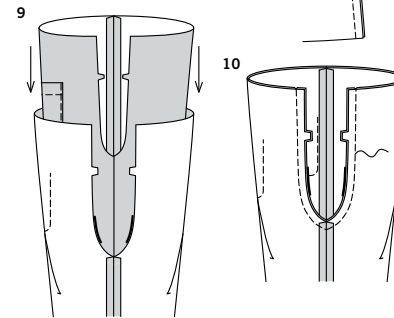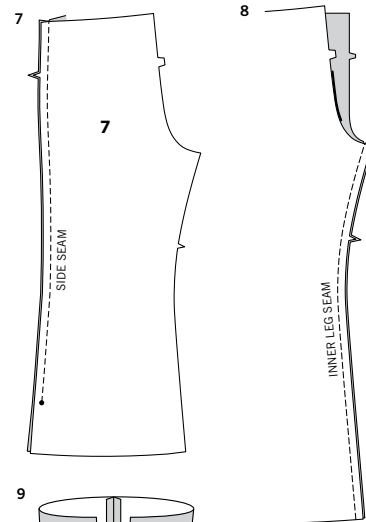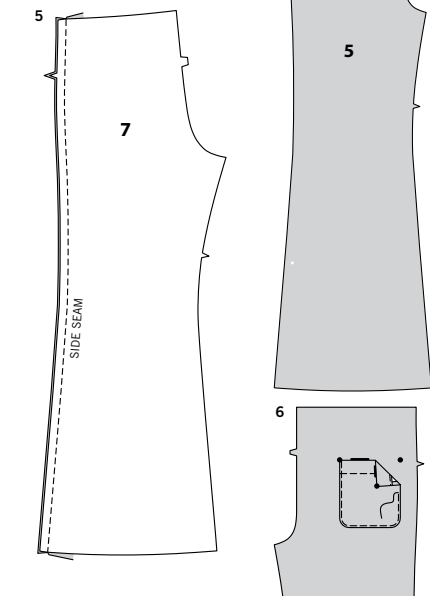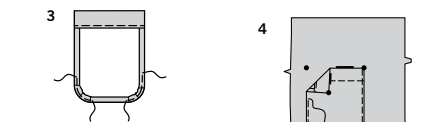

7. Stitch front to back at side seam, matching notches, leaving open below large dot.

CONTINUE AS FOLLOWS FOR VIEWS C, D

8. Stitch front to back at inner leg seams.

9. With **RIGHT** sides together, insert one leg **INSIDE** the other.

10. With **RIGHT** sides together, pin center seam, matching inner leg seams and notches. Stitch. To reinforce seam, stitch again over first stitching.

11. Cut a piece of elastic the length of guide for elastic. Transfer all markings with chalk or pencil. Stitch ends together at center back seam.

12. On **OUTSIDE**, pin elastic to pants having upper edges even, matching centers, placing small dots at side seams. Stitch, stretching elastic to fit.

13. Turn elastic to **INSIDE**; press. To keep the elastic from rolling to **OUTSIDE**, secure it at seams by stitching in the ditch or groove of each seam.

FOR VIEW C

14. Turn up 1 1/4" (3.2cm) hem on lower edge of pants. Turn 1/4" (6mm) on raw edge of hem to wrong side; press. Stitch close to inner edge of hem.

FOR VIEW D

15. Turn up 1 1/4" (3.2cm) hem on lower edge of pants. Turn 1/4" (6mm) on raw edge of hem to wrong side; press. Stitch close to inner edge of hem. Make **NARROW HEM** at side opening edges, tapering to nothing above large dot, squaring stitching at opening.



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.