

S9757

Simplicity®

easy-to-sew



Designed and printed in USA.



MISSES' KNIT TOP AND SKIRT IN TWO LENGTHS

Suggested Fabrics: Stretch Knits only such as Bamboo, ITY, Jersey, Rib Knit. See Pick-A-Knit® Rule.

Notions: A,B: One pkg. of $\frac{1}{4}$ " (1.3cm) single fold bias tape. Also for B: $\frac{3}{4}$ yd. (0.7m) of $\frac{1}{4}$ " (6mm) elastic. **C,D:** 1 $\frac{1}{4}$ yds. (1.1m) of 1" (2.5cm) elastic. **Also for D:** 1 $\frac{1}{4}$ yds. (1.2m) of $\frac{1}{4}$ " (6mm) elastic.

Sizes	S	M	L	XL	XXL
European	34-36	38-40	42-44	46-48	50-52

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	31 $\frac{1}{2}$ -32 $\frac{1}{2}$	34-36	38-40	42-44	46-48	Ins.
Waist	24-25	26 $\frac{1}{2}$ -28	30-32	34-37	39-41 $\frac{1}{2}$	"
Hip-9" below waist	33 $\frac{1}{2}$ -34 $\frac{1}{2}$	36-38	40-42	44-46	48-50	"
Back-neck to waist	15 $\frac{1}{4}$ -16	16 $\frac{1}{4}$ -16 $\frac{1}{2}$	16 $\frac{1}{4}$ -17	17 $\frac{1}{4}$ -17 $\frac{1}{2}$	17 $\frac{1}{4}$ -18	"

Top A	60**	$\frac{1}{8}$	$\frac{1}{8}$	$\frac{1}{8}$	$\frac{1}{8}$	1	Yd.
Top B	60**	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	Yd.
Skirt C	60**	1 $\frac{1}{4}$	Yds.				
Skirt D	60**	$\frac{1}{8}$	$\frac{1}{8}$	$\frac{1}{8}$	$\frac{1}{8}$	$\frac{1}{8}$	Yd.

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B Bust	34	37 $\frac{1}{2}$	41 $\frac{1}{2}$	45 $\frac{1}{2}$	49 $\frac{1}{2}$	Ins.
A Waist	29	32 $\frac{1}{2}$	36 $\frac{1}{2}$	40 $\frac{1}{2}$	44 $\frac{1}{2}$	"
C Hip	36	39 $\frac{1}{2}$	43 $\frac{1}{2}$	47 $\frac{1}{2}$	51 $\frac{1}{2}$	"
D Hip	33 $\frac{1}{2}$	37	41	45	49	"
Width, lower edge						
Top A	31 $\frac{1}{2}$	35	39	43	47	Ins.
Top B	26 $\frac{1}{2}$	30	34	38	42	"
Skirt C	36	39 $\frac{1}{2}$	43 $\frac{1}{2}$	47 $\frac{1}{2}$	51 $\frac{1}{2}$	"
Skirt D	32	35 $\frac{1}{2}$	39 $\frac{1}{2}$	43 $\frac{1}{2}$	47 $\frac{1}{2}$	"

Finished back length from base of neck

Top A	22	22 $\frac{1}{2}$	23	23 $\frac{1}{2}$	24	Ins.
Top B	16	16 $\frac{1}{2}$	17	17 $\frac{1}{2}$	18	"

Finished back length from waist

Skirt C	34	34	34	34	34	Ins.
Skirt D	18	18	18	18	18	"

*with nap **without nap

Easy

Facile

HAUT ET JUPE EN TRICOT EN DEUX LONGUEURS POUR JEUNES FEMMES

Tissus Conseillés: Seulement pour tricots extensibles tels que Tricot de bambou, Tricot, Tricot de Jersey, Tricot à côtes. Veuillez la Règle-Pour-Choisir-Un-Tricot®.

Mercerie: A,B: 1 paquet de ruban de biais simple de 1.3cm. Aussi pour B: 0.7m d'élastique de 6mm. C,D: 1.1m d'élastique de 2.5cm. Aussi pour D: 1.2m d'élastique de 6mm.

Tailles	P/S	M/M	G/L	TG/XL	TTG/XXL
Françaises	36-38	40-42	44-46	48-50	52-54
Européen	34-36	38-40	42-44	46-48	50-52

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	80-83	87-92	97-102	107-112	117-122	cm
Taille	61-64	67-71	76-81	87-94	99-105	"
Hanches (23cm au-dessous de la taille)	85-88	92-97	102-107	112-117	122-127	cm

Dos du cou à la taille	40-40.5	41.5-42	42.5-43	44-44.5	45-45.5
Haut A	150cm*	0.8	0.8	0.8	0.8
Haut B	150cm*	0.7	0.7	0.7	0.7
Jupe C	150cm*	1.2	1.2	1.2	1.2
Jupe D	150cm*	0.7	0.7	0.7	0.7

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B Poitrine	86	95	105	116	126	cm
A Taille	74	83	93	103	113	"
C Hanches	91	100	110	121	131	"
D Hanches	85	94	104	114	124	"

Largeur à l'ourlet

Haut A	80	89	99	109	119	cm
Haut B	67	76	86	97	107	"
Jupe C	91	100	110	121	131	"
Jupe D	81	90	100	110	121	"


Longueur fine – dos, votre nuque à l'ourlet

Haut A	56	57	58	60	61	cm
Haut B	41	42	43	44	46	"

Longueur fine – dos, taille à l'ourlet

Jupe C	86	86	86	86	86	cm
Jupe D	46	46	46	46	46	"

*avec sens **sans sens



Use the 1 inch (2.54cm) box to ensure you are using rule at 100%.

Utilizez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadro de 2.54 cm para asegurarse de estar usando la regla al 100%.


PICK-A-KNIT® RULE

FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE
POUR CE PATRON - LE JERSEY DOIT S'ÉTIRER DANS LA LÉGÜRE DE 4" (10 cm) DEPUIS ICY
PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO ANCHO POR 4" (10 cm) DESDE AQUÍ


→ **TO HERE 50% JUSQUE LA 50% HASTA ALLÍ 50%** →

Simplicity®

Thank you for purchasing this Simplicity pattern.
We made every effort to provide you with a high quality product.

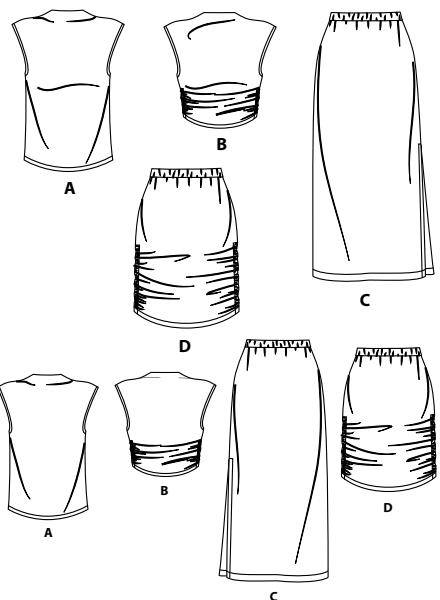

9 PIECES

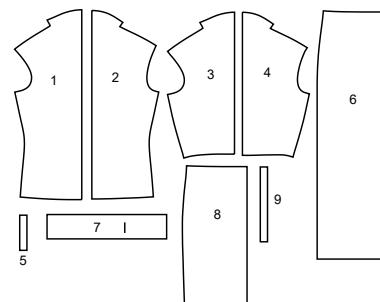

1 FRONT-A
2 BACK-A
3 FRONT-B
4 BACK-B
5 GUIDE FOR ELASTIC-B
6 FRONT AND BACK-C
7 CASING-C,D
8 FRONT AND BACK-D
9 GUIDE FOR ELASTIC-D

Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

SIZED FOR STRETCH KNITS ONLY

TOP A

USE PIECES 1 2


60" (150CM)
WITH NAP
ALL SIZES



TOP B

USE PIECES 3 4


60" (150CM)
WITH NAP
ALL SIZES



SKIRT C

USE PIECES 6 7


60" (150CM)
WITH NAP
ALL SIZES

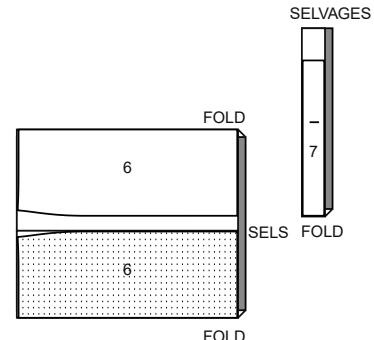

SKIRT D

USE PIECES 7 8

60" (150CM)
WITH NAP
ALL SIZES

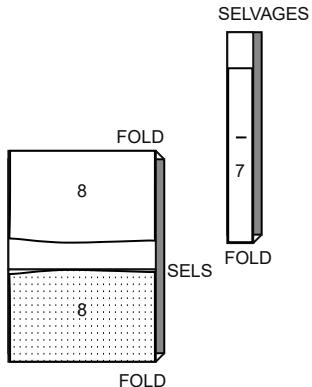

General Directions

Cutting/Marking

SYMBOLS
GRAIN LINE Place on straight grain of fabric parallel to selvage

PLACE SOLID LINE on fold of fabric.

CENTER FRONT OR BACK of garment.

NOTCHES

DOTS

CUTTING LINE

LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS.

Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
Make adjustments before placing pattern on fabric.

TO LENGTHEN: Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

TO SHORTEN: At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

BEFORE CUTTING:
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.

PIN pattern to fabric as shown in Cutting Layouts.

• FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.

• FOR SINGLE THICKNESS: Place fabric RIGHT side up.

• FOR PILE, SHAGGED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING:
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.




SPECIAL CUTTING NOTES

★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.



★ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).

Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).





Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials

Sewing Directions

FABRIC KEY

RIGHT SIDE	WRONG SIDE	INTERFACING	LINING
------------	------------	-------------	--------

Read **General Directions** on page 1 before you begin.

Sewing methods shown in **ITALICS** are defined below:

FINISH - Stitch 1/4" (6mm) from raw edge and finish with one of the following: (1) Pink OR (2) Overcast OR (3) Turn in along stitching and stitch close to fold OR (4) Overlock.

OPTIONAL FOR HEMS: Apply Seam Binding.

UNDERSTITCH - Press tape and seam away from garment. Stitch through tape and seam allowance close to seam.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.


STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

NOTE: Use a ball point or stretch needle. Narrow zig-zag stitch or a stretch stitch.


TOP A

FRONT AND BACK


1. To reinforce FRONT (1) at neck edge, stitch overarm curve along stitching line. Clip along solid line, being careful not to clip through stitching.

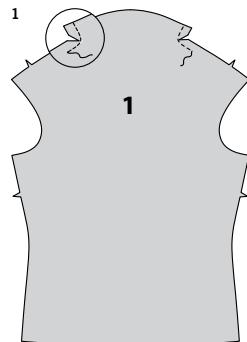





2. Turn self facing on front to INSIDE, having raw edges even. Press lightly; baste raw edges.



3. To reinforce BACK (2) at neck edge, stitch overarm curve along stitching line. Clip along solid line, being careful not to clip through stitching.

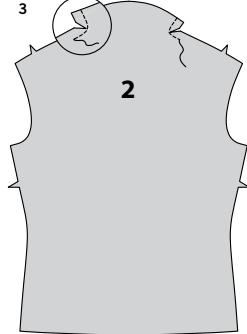





4. Pin back to front at overarm edges, matching notches.

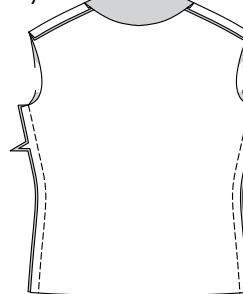

5. Turn back self facing to OUTSIDE along clip (over front). Stitch entire overarm seam; trim seams.

6. Turn back self facing to INSIDE, turning overarm seam allowances toward back; press.

7. Stitch back to front at sides.

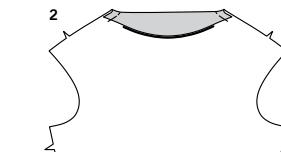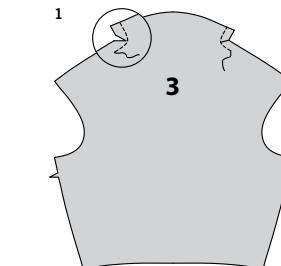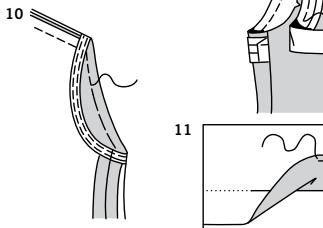

ARMHOLE FINISH

8. Open out one edge of single fold bias tape; press.

9. With **RIGHT** sides together, pin tape to armhole edge having raw edges even, turning under and lapping one end at side seam. Stitch in 3/8" (1cm) seam. Trim seam; clip curves.

10. **UNDERSTITCH** the tape. Turn tape to INSIDE; press. Baste close to inner edge of tape. On OUTSIDE, top-stitch as basted.



HEM

11. Press up 3/4" (2cm) hem on lower edge of top. Stitch OR zig-zag 1/4" (6mm) from raw edge.

TOP B

FRONT AND BACK


1. To reinforce FRONT (3) at neck edge, stitch overarm curve along stitching line. Clip along solid line, being careful not to clip through stitching.

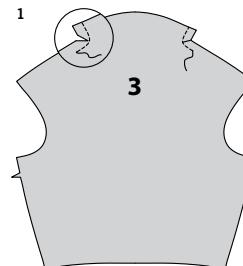

2. Turn self facing on front to INSIDE, having raw edges even. Press lightly; baste raw edges.

S9757

3 of 3

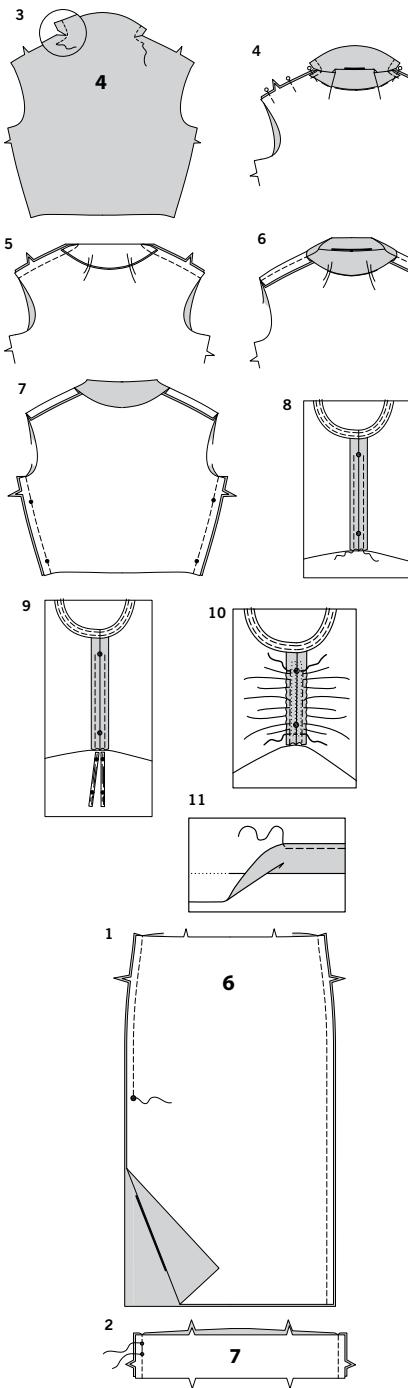

3. To reinforce BACK (4) at neck edge, stitch overarm curve along stitching line. Clip along solid line, being careful not to clip through stitching.

4. Pin back to front at overarm edges, matching notches.

5. Turn back self facing to OUTSIDE along clip (over front). Stitch entire overarm seam; trim seams.

6. Turn back self facing to INSIDE, turning overarm seam allowances toward back; press.

SIDE SEAMS

7. Pin back to front at sides, RIGHT sides together, matching dots. Stitch side seams; press seams open.

8. To make casings, stitch $3/8"$ (1cm) from each seam allowance, from lower edge to upper dot. Cut four pieces of $1/4"$ (6mm) wide elastic, each using GUIDE FOR ELASTIC (5) pattern piece. Transfer markings.

9. Insert one elastic piece through each casing, matching dots and having lower edges even. (Ends of elastic extend beyond dots). Pin.

10. Stitch across upper and lower ends of casing between dots, catching in elastics.

ARMHOLE FINISH

Prepare and apply bias tape to armhole edges in the same manner as described for TOP A, steps 8-10.

HEM

11. Press up $3/4"$ (2cm) hem on lower edge of top. Stitch OR zig-zag $1/4"$ (6mm) from raw edge.


SKIRT C

FRONT AND BACK

1. Pin FRONT AND BACK (6) sections, RIGHT sides together, matching dots. Stitch side seams, leaving left side free below dot.

CASING

2. With RIGHT sides together, stitch CASING (7) sections, RIGHT sides together. Stitch side seams, leaving an opening between small dots, as shown. Back-stitch at small dots to reinforce seam. Press seams open.

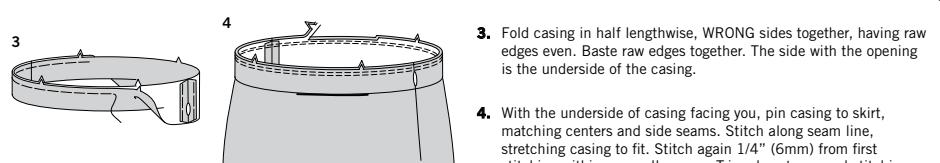

3. Fold casing in half lengthwise, WRONG sides together, having raw edges even. Baste raw edges together. The side with the opening is the underside of the casing.

4. With the underside of casing facing you, pin casing to skirt, matching centers and side seams. Stitch along seam line, stretching casing to fit. Stitch again $1/4"$ (6mm) from first stitching within seam allowance. Trim close to second stitching.

5. Press seam toward skirt, pressing casing out.

6. Cut a piece of elastic to fit waist, plus $1"$ (2.5cm). Insert elastic through opening in casing. Overlap ends and hold with safety pins.

7. Try on skirt and adjust to fit. Stitch ends of elastic together securely.

8. Slip-stitch opening edges of casing together.
TIP-To secure elastic so it won't twist in wearing, stitch through all thicknesses of casing in the groove of each seam.

HEM

9. Press up $1-1/4"$ (3.2cm) hem on lower edge of skirt. Stitch OR zig-zag $1/4"$ (6mm) from raw edge.

10. Press under $5/8"$ (1.5cm) on left side opening edges below dot. To form hem, tuck under raw edge to meet crease; press. Stitch hem close to inner pressed edge, squaring stitching even with dot.

SKIRT D

FRONT AND BACK

1. Pin FRONT AND BACK (8) sections, RIGHT sides together, matching dots. Stitch side seams; press seams open.

2. To make casings, stitch $3/8"$ (1cm) from each seam allowance, from lower edge to upper dot. Cut four pieces of $1/4"$ (6mm) wide elastic, each using GUIDE FOR ELASTIC (9) pattern piece. Transfer markings.

3. Insert one elastic piece through each casing, matching dots and having lower edges even. (Ends of elastic extend beyond dots). Pin. Stitch across upper and lower ends of casing between dots, catching in elastics.

WAIST CASING

Prepare and stitch/apply casing in the same manner as described for SKIRT C, steps 2-8.

HEM

4. Press up $3/4"$ (2cm) hem on lower edge of skirt. Stitch OR zig-zag $1/4"$ (6mm) from raw edge.



Congrats!

You've completed your sewing adventure

SHARE YOUR LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at **simplicity.com**

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.