



Average

Moins Facile

WOMEN'S KNIT TOPS, PANTS AND SKIRT

Suggested Fabrics: Stretch Knits only such as ITY, Jersey, Spandex Blends, Stretch Velvet. See Pick-A-Knit® Rule.

Notions: A,B: One pkg. of ½" (1.3cm) single fold bias tape, one 16" (41cm) invisible zipper (adjust to fit). C,D: 1½ yds. (1.4m) of ¼" (6mm) elastic.

Sizes	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
European	46	48	50	52	54	56	58	60	62	64

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	42	44	46	48	50	52	54	56	58	60	Ins.
Waist	35	37	39	41½	44	46½	49	51½	53	54½	"
Hip-9" below waist	44	46	48	50	52	54	56	58	60	62	"
Back-neck to waist	17¼	17½	17¾	17¾	17¾	17¾	18	18½	18¾	18¾	"

Top A	60**	2%	2%	2%	2¼	2¼	2%	2%	2%	3%	3¾	Yds.
Top B	60**	2%	2%	2%	2¼	2¼	2¼	2¼	2¼	4	4	Yds.
Pants C	60**	2½	2½	2½	2%	2%	2%	2%	2%	2%	3%	Yds.
Skirt D	60**	1%	1%	1%	1%	1%	1%	1½	2%	2¼	Yds.	

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B Bust	39½	41½	43½	45½	47½	49½	51½	53½	55½	57½	Ins.
A,B Waist	35	37	39	41	43	45	47	49	51	53	"
C,D Waist	33½	35½	37½	39½	41½	43½	45½	47½	49½	51½	"
C Hip	43	45	47	49	51	53	55	57	59	61	"
D Hip	42½	44½	46½	48½	50½	52½	54½	56½	58½	60½	"
Width, lower edge											
Skirt D	43¾	45¾	47¾	49¾	51¾	53¾	55¾	57¾	59¾	61¾	Ins.
Width, each leg											
Pants C	36¾	37¾	38¾	40	41¼	42¼	43¾	45	46¼	47¼	Ins.
Finished back length from waist											
Skirt D	27½	27½	27½	27½	27½	27½	27½	27½	27½	27½	Ins.
Finished side length from waist											
Pants C	41¾	42	42¼	42¼	42¾	43	43¼	43¾	43¾	44	Ins.

*with nap **without nap

HAUTS EN TRICOT, PANTALON ET JUPE POUR FEMMES

Tissus Conseillés: Seulement pour tricot extensibles tels que Tricot ITY, Jersey, Mélanges de spandex, Velours extensible. Voyez la Règle-Pour-Choisir-Un-Tricot®.

Mercerie: A,B: 1 paquet de ruban de biais simple de 1.3cm, 1 fermeture à glissière invisible de 41cm (adaptez pour ajuster). C,D: 1.4m d'élastique de 6mm.

Tailles	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
Françaises	48	50	52	54	56	58	60	62	64	66
Européen	46	48	50	52	54	56	58	60	62	64

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	107	112	117	122	127	132	137	142	147	152	cm
Taille	89	94	99	105	112	118	124	130	134	138	"
Hanches (23cm au-dessous de la taille)	112	117	122	127	132	137	142	147	152	157	cm
Dos du cou à la taille	44	44	44.5	45	45	45.5	46	46	46.5	47	"

Haut A	150cm*	1.9	1.9	1.9	2.1	2.5	2.5	2.6	2.6	3.3	3.4	m
Haut B	150cm*	1.9	1.9	1.9	2.1	2.1	2.1	2.1	2.1	3.7	3.7	m
Pantalon C	150cm*	2.3	2.3	2.3	2.3	2.4	2.5	2.5	2.6	2.6	2.9	m
Jupe D	150cm*	1.0	1.0	1.0	1.0	1.0	1.0	1.4	1.9	2.1	m	

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B Poitrine	100	105	110	116	121	126	131	136	141	146	cm
A,B Taille	89	94	99	104	109	114	119	124	130	135	"
C,D Taille	85	90	95	100	105	110	116	121	126	131	"
C Hanches	109	114	119	124	130	135	140	145	150	155	"
D Hanches	108	113	118	123	128	133	138	144	149	154	"
Largeur à l'ourlet											
Jupe D	111	116	121	126	131	137	142	147	152	157	cm
Largeur, chaque jambe											
Pantalon C	92	95	98	102	105	108	111	114	117	121	cm
Longueur finie – dos, taille à l'ourlet											
Jupe D	70	70	70	70	70	70	70	70	70	70	cm
Longueur finie – côté, taille à l'ourlet											
Pantalon C	106	107	107	108	109	109	110	110	111	112	cm

*avec sens **sans sens



Use the 1 inch (2.54cm) box to ensure you are using rule at 100%

Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.

PICK-A-KNIT® RULE

FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE
POUR CE PATRON - LE JERSEY DOIT S'ÉTIRER DANS LA LARGEUR DE 4" (10 cm) DEPUIS ICI
PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO ANCHO POR 4" (10 cm) DESDE AQUÍ





TO HERE 50%
JUSQUE LÀ 50%
HASTA ALLA 50%




When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.
Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

Simplicity

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

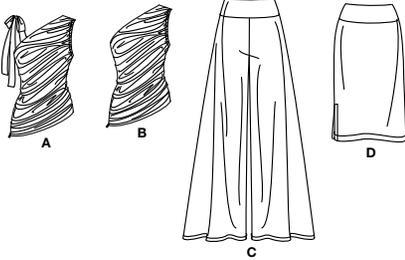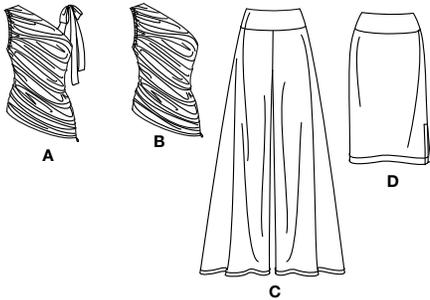

8 PIECES

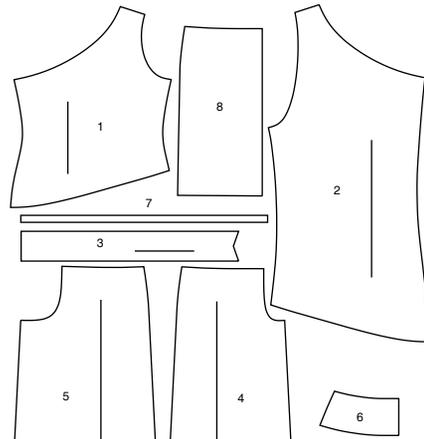

- 1 FRONT AND BACK - A,B
- 2 FRONT AND BACK OVERLAY - A,B
- 3 SHOULDER STRAP - A,B
- 4 FRONT - C
- 5 BACK - C
- 6 YOKE FRONT AND BACK - C,D
- 7 ELASTIC GUIDE FOR WAIST - C,D
- 8 FRONT AND BACK - D

General Directions

The Pattern

SYMBOLS

- GRAIN LINE: Place on straight grain of fabric parallel to selvage
- PLACE SOLID LINE on fold of fabric.
- CENTER FRONT OR BACK OF GARMENT.
- NOTCHES
- DOTS
- CUTTING LINE
- LENGTHEN OR SHORTEN LINES

ADJUST IF NEEDED

Make adjustments before placing pattern on fabric.

TO LENGTHEN: Spread pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

TO SHORTEN: At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING:

PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.

PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING:

Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.

To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

Sewing

- SEW garment following **Sewing Directions**.
 - PIN or machine-baste seams matching notches.
 - STITCH 5/8" (1.5 cm) seams unless otherwise stated.
 - PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
 - TRIM seams to reduce bulk, as shown below.
-

SPECIAL CUTTING NOTES

- If layout shows a piece extending past fold, cut out all pieces except piece that extends.
- Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).
- Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).

Cutting Layouts

WRONG SIDE OF FABRIC RIGHT SIDE OF FABRIC PATTERN PIECE WITH PRINTED SIDE UP PATTERN PIECE WITH PRINTED SIDE DOWN SEE SPECIAL CUTTING NOTES


POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

ALL VIEWS SIZED FOR STRETCH KNITS ONLY


TOP A

USE PIECES 1 2 3


60" (150CM) WITH NAP
SIZES 20W 22W 24W

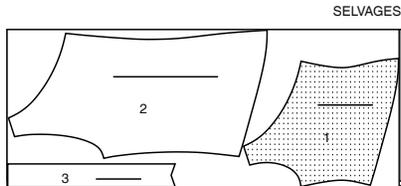

60" (150CM) WITH NAP
SIZES 26W 28W 30W 32W 34W

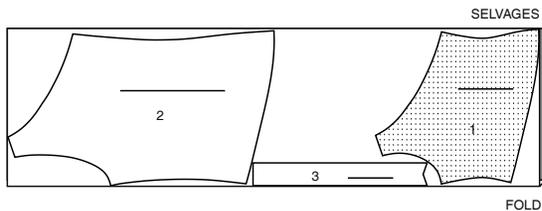


60" (150CM) WITH NAP
SIZES 36W 38W

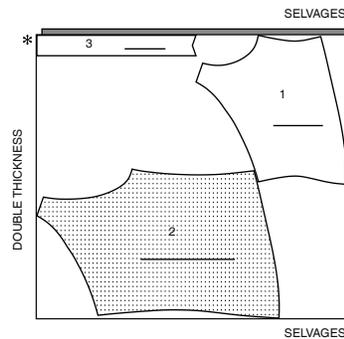


TOP B

USE PIECES 1 2

60" (150CM) WITH NAP
SIZES 20W 22W 24W 26W 28W 30W 32W 34W

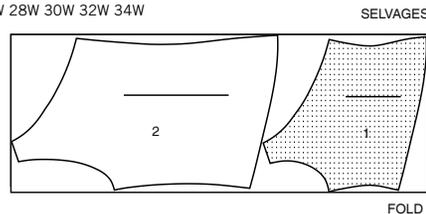


60" (150CM) WITH NAP
SIZES 36W 38W

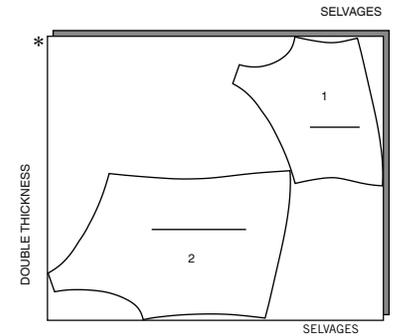

PANTS C


USE PIECES 4 5 6
PIECE 7 IS CUT OF ELASTIC

60" (150CM) WITH NAP
SIZES 20W 22W 24W 26W 28W

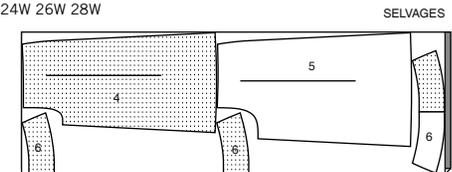

CUTTING LAYOUTS CONTINUED ON PAGE 2

60" (150CM)
WITH NAP
SIZES 30W 32W 34W 36W 38W

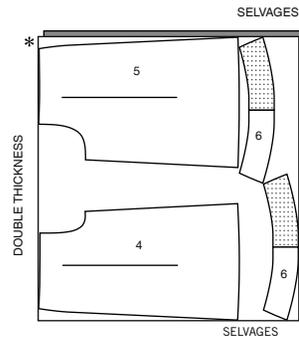


SKIRT D


USE PIECES 6 8

PIECE 7 IS CUT OF ELASTIC

60" (150CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W 30W 32W

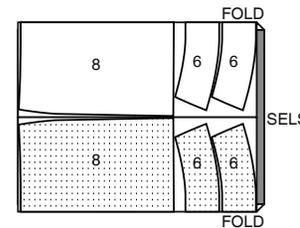



60" (150CM)
WITH NAP
SIZES 34W 36W 38W

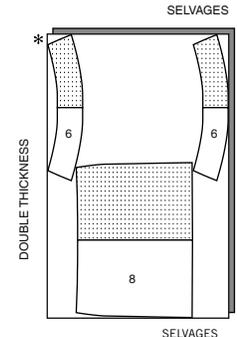

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials

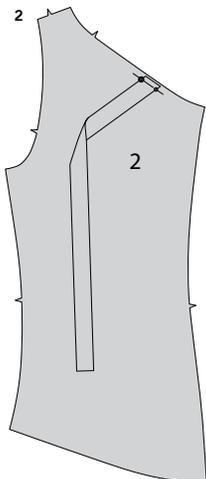

Sewing Directions



Read **General Directions** on page 1 before you begin.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

INVISIBLE ZIPPER – see Zippers: “sewing an invisible zipper” video.

NARROW HEM – see Hems: “sewing narrow hems” video.

TOPSTITCH – see Machine Stitches: “how to topstitch” video.

UNDERSTITCH – see Machine Stitches: “how to understitch” video.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH 5/8" (1.5CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.


TOP A, B

NOTE: For clarity, illustrations of front and back (1) will be shown as lining.

1. FOR VIEW A – Fold each shoulder strap (3) in half lengthwise with **RIGHT** sides together. Stitch, leaving end with small and large dots open. Trim seam; clip corner.


2. Turn straps. On **OUTSIDE**, pin one strap to each front and back overlay (2), matching small and large dots. Baste.

CONTINUE AS FOLLOWS FRO BOTH VIEWS

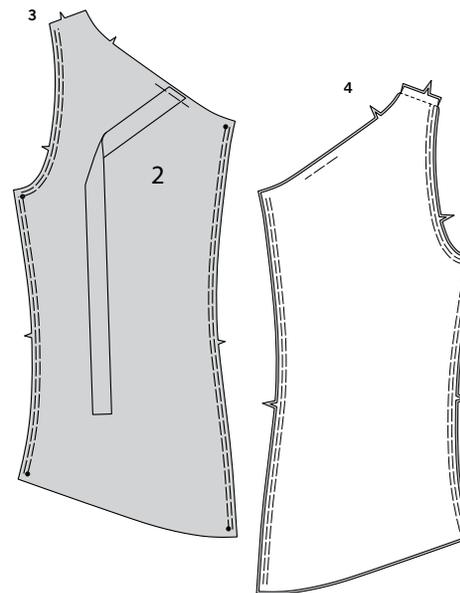


3. To gather armhole and side edges between the small dots of front and back overlay (2), stitch 1/2" (1.3cm) from raw edge and again 1/4" (6mm) from raw edge, using a long machine stitch.


4. Stitch shoulder edges of overlay.

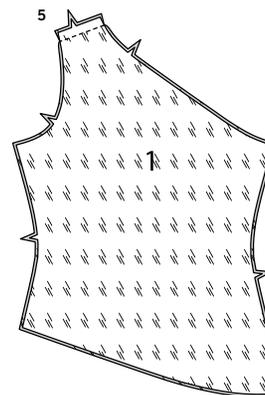


5. Stitch front and back (1) shoulder edges together.

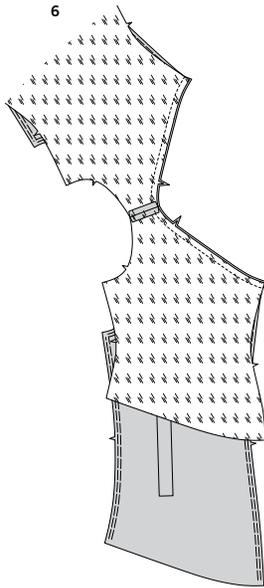


- 6.** With **RIGHT** sides together, pin overlay to top at neck edge, matching centers, seams, and notches. Stitch. **UNDERSTITCH** the top- see [how to understitch](#) video.

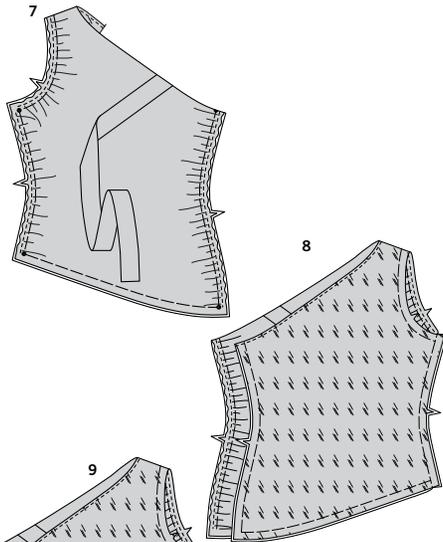

- 7.** Turn top to **INSIDE**; press. On **OUTSIDE**, pull up gathering stitches on side and armhole edges of overlay between the small dots to fit the top. Baste raw edges of overlay to top along all remaining seamlines.


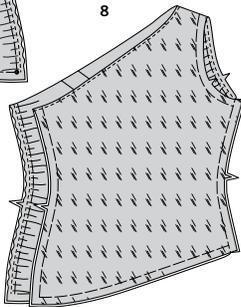


- 8.** Stitch **RIGHT** side seam of top.

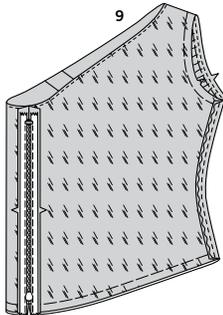


NOTE: *Zipper opens from the lower edge, up.*

- 9.** Insert **INVISIBLE ZIPPER** (dirty finish) with top stop 3/4" (2cm) from lower edge and bottom stop at the large dot. Stitch remainder of seam and shorten zipper- see [Zippers sewing an invisible zipper](#) video

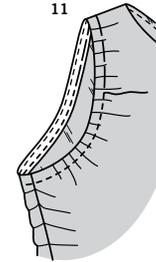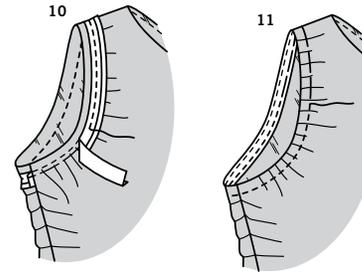


- 10.** Open out one edge of single fold bias tape. With **RIGHT** sides together, pin tape to armhole edge having crease 5/8" (1.5cm) from raw edge, turning under and lapping one end at side seam. Stitch. Trim seam.

- 11.** **UNDERSTITCH** the tape- see [how to understitch](#) video. Turn tape to **INSIDE**; press. Baste close to inner edge of tape. On **OUTSIDE**, **TOPSTITCH** edge as basted- see [how to topstitch](#) video.


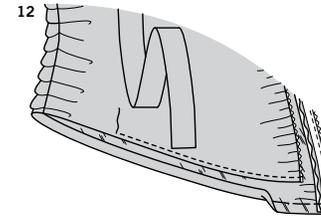


- 12.** Press up hem and upper edge of zipper tape along basting. **TOPSTITCH** edge. Remove basting.

PANTS C

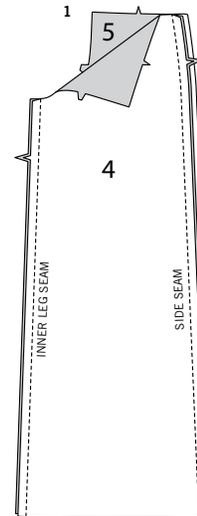

- 1.** Stitch front (4) to back (5) at inner leg and side seams.

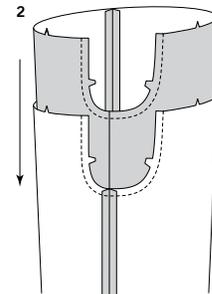


- 2.** With **RIGHT** sides together, insert one leg **INSIDE** the other.

- 3.** With **RIGHT** sides together, pin center seam, matching inner leg seams and notches. Stitch. To reinforce seam, stitch again over first stitching.


S9790

4 of 4

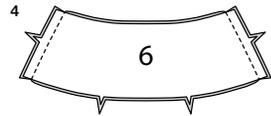


NOTE: You have cut four yoke front and back sections. Two will be the yoke front and back and two will be used as facings.


- 4.** Pin yoke front and back (6) sections together at side edges. Stitch. Stitch yoke front and back facing sections together in the same manner.




- 5.** With RIGHT sides together and raw edges even, pin yoke to yoke facing at upper edge, matching seams. Stitch.

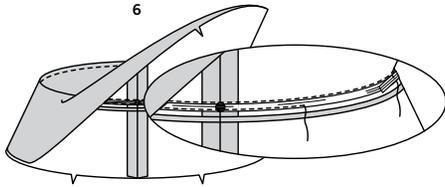

- 6.** Open out the yoke; press seam toward facing. Cut a piece of elastic the length of the elastic guide for waist (7). Stitch ends. On INSIDE, pin elastic to facing over seam allowance with upper edge along seam line, matching centers, and placing side seams at small dots. Stitch close to lower edge of elastic, stretching elastic to fit.

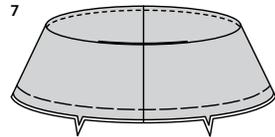


- 7.** Turn yoke; press. Baste raw edges together.

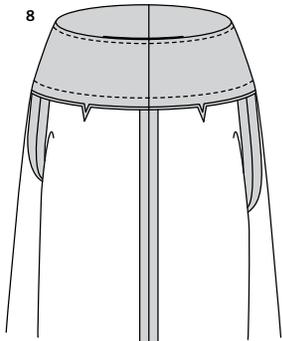


- 8.** Pin pants to yoke, matching centers, seams, and notches. Stitch. Press seam toward pants.
NARROW HEM pant legs- see [how to sew a narrow hem](#) video.

SKIRT D

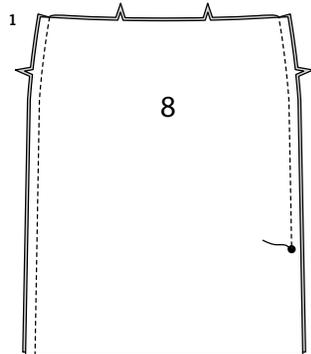


- 1.** Pin front and back (8) sections together at side edges. Stitch RIGHT side seam. Stitch left side seam from upper edge to large dot, back-stitching at dot to reinforce the seam.

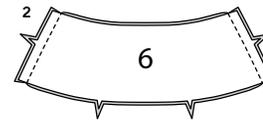


NOTE: You have cut four yoke front and back sections. Two will be the yoke front and back and two will be used as facings.


- 2.** Pin yoke front and back (6) sections together at side edges. Stitch. Stitch yoke front and back facing sections together in the same manner.

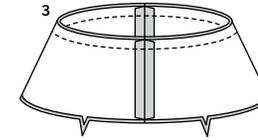


- 3.** With RIGHT sides together and raw edges even, pin yoke to yoke facing at upper edge, matching seams. Stitch.

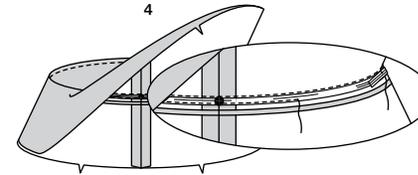


- 4.** Open out the yoke; press seam toward facing. Cut a piece of elastic the length of the elastic guide for waist (7). Stitch ends. On INSIDE, pin elastic to facing over seam allowance with upper edge along seam line, matching centers, and placing side seams at small dots. Stitch close to lower edge of elastic, stretching elastic to fit.

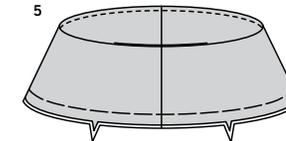

- 5.** Turn yoke; press. Baste raw edges together.

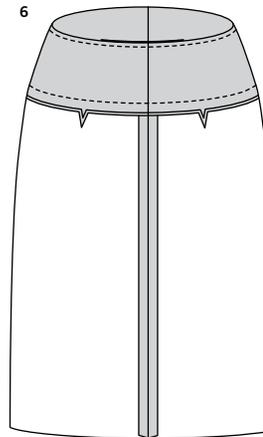

- 6.** Pin skirt to yoke, matching centers, seams, and notches. Stitch. Press seam toward skirt.



- 7.** Press up hem allowance on skirt. Stitch 1" (2.5cm) from pressed edge. **NARROW HEM** LEFT side opening edges, squaring stitching at opening end- see [how to sew a narrow hem](#) video.



Congrats!

You've completed your sewing adventure

SHARE YOUR LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at **simplicity.com**

Have a question or need help with your sewing project call us at
1-888-588-2700

Simplicity
by design

Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.