

S9820

Simplicity



easy-to-sew

Easy

Facile

MISSES' KNIT DRESSES AND SHRUG

Suggested Fabrics: Stretch Knits only such as Lightweight Ponte Knits, Jersey, Rib Knit, Stretch Velvet, Sweater Knits. See Pick-A-Knit® Rule.

Notions: A,B: 18" (46cm) invisible zipper, 1½ yd. (1.4m) of 1" (2.5cm) elastic.

Sizes	8	10	12	14	16	18	20	22	24	26
European	34	36	38	40	42	44	46	48	50	52

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	31½	32½	34	36	38	40	42	44	46	48	Ins.
Waist	24	25	26½	28	30	32	34	37	39	41½	"
Hip-9" below waist	33½	34½	36	38	40	42	44	46	48	50	"
Back-neck to waist	15¾	16	16¼	16½	16¾	17	17¼	17½	17¾	17¾	"

Dress A	60**	1¾	2	2	2¼	2½	2½	2½	2½	2½	2½	Yds.
----------------	------	----	---	---	----	----	----	----	----	----	----	------

Interfacing A,B
20" - ¾ yd.

Dress B	60**	1¾	1¾	2¾	2¾	3	3	3¼	3¼	3¼	3¼	Yds.
----------------	------	----	----	----	----	---	---	----	----	----	----	------

Shrug C	60**	1¾	1¾	1¾	1¾	1½	1½	1½	1½	1¾	1¾	Yds.
----------------	------	----	----	----	----	----	----	----	----	----	----	------

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B Bust	28	29	30½	32½	34½	36½	38½	40½	42½	44½	Ins.
A,B Waist	25½	26½	28	30	32	34	36	38	40	42	"
A,B Hip	34	35	36½	38½	40½	42½	44½	46½	48½	50½	"
Width, lower edge											
Dress A	46	47	48½	50½	52½	54½	56½	58½	60½	62½	Ins.
Dress B	55½	56½	58	60	62	64	66	68	70	72	"
Finished back length from base of neck											
Dress A	47¾	48	48¾	48¾	48¾	49	49¼	49½	49¾	50	Ins.
Dress B	57¾	58	58¾	58¾	58¾	59	59¼	59½	59¾	60	"

*with nap **without nap

ROBES EN TRICOT ET BOLÉRO POUR JEUNES FEMMES

Tissus Conseillés: Seulement pour tricotés extensibles tels que: Tricotés ponte légère, Jersey, Tricot à côtes, Velours extensible, Tricotés pour chandails. Voyez la Règle-Pour-Choisir-Un-Tricot®.

Mercerie: A,B: Fermeture à glissière invisible de 46cm (coupée pour ajuster), 1.4m d'élastique de 2.5cm.

Tailles	8	10	12	14	16	18	20	22	24	26
Françaises	36	38	40	42	44	46	48	50	52	54
Européen	34	36	38	40	42	44	46	48	50	52

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	80	83	87	92	97	102	107	112	117	122	cm
Taille	61	64	67	71	76	81	87	94	99	106	"

Hanches (23cm au-dessous de la taille)

	85	88	92	97	102	107	112	117	122	127	cm
--	----	----	----	----	-----	-----	-----	-----	-----	-----	----

Dos du cou à la taille	40	40.5	41.5	42	42.5	43	44	44	44.5	44.5	"
-------------------------------	----	------	------	----	------	----	----	----	------	------	---

Robe A	150cm*	1.7	1.8	1.8	1.8	1.9	1.9	1.9	2.3	2.3	2.4	m
---------------	--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

Entoilage A,B

51cm-0.8m

Robe B	150cm*	1.6	1.7	2.2	2.5	2.7	2.7	2.9	2.9	2.9	m
---------------	--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

Boléro C	150cm*	1.3	1.3	1.3	1.3	1.4	1.4	1.4	1.4	1.5	m
-----------------	--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B Poitrine	71	74	77	83	88	93	98	103	108	113	cm
---------------------	----	----	----	----	----	----	----	-----	-----	-----	----

A,B Taille	65	67	71	76	81	86	91	97	102	107	"
-------------------	----	----	----	----	----	----	----	----	-----	-----	---

A,B Hanches	86	89	93	98	103	108	113	118	123	128	"
--------------------	----	----	----	----	-----	-----	-----	-----	-----	-----	---

Largeur à l'ourlet

Robe A	117	119	123	128	133	138	144	149	154	159	cm
---------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----

Robe B	141	144	147	152	157	163	168	173	178	183	"
---------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

Longueur finie - dos, votre nuque à l'ourlet

Robe A	121	122	123	123	124	124	125	126	126	127	cm
---------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----

Robe B	147	147	148	149	149	150	150	151	152	152	"
---------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

*avec sens **sans sens



Use the 1 inch (2.54cm) box to ensure you are using rule at 100%

Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.

PICK-A-KNIT® RULE


FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE TO HERE 35% JUSQUE LA 35% HASTA ALLA 35%

POUR CE PATRON - LE JERSEY DOIT S'ÉTIRER DANS LA LARGUEUR DE 4" (10 cm) DEPUIS ICI PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO ANCHO POR 4" (10 cm) DESDE AQUI


When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
 Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.
 Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

Simplicity

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

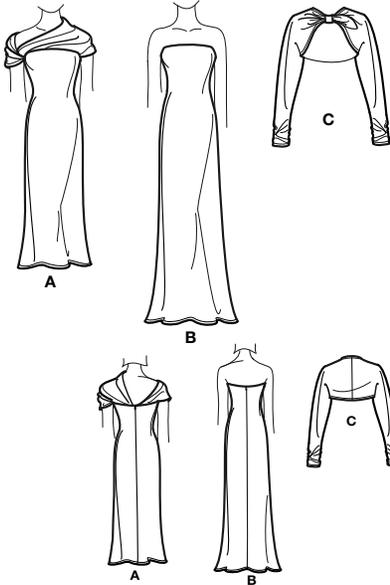

13 PIECES

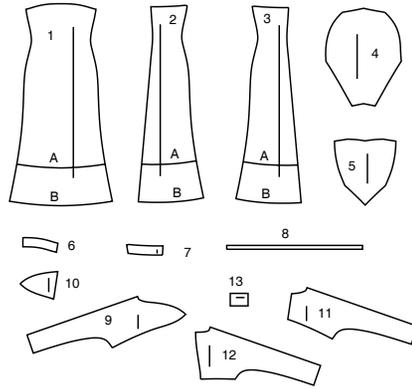



- 1 FRONT - A
- 2 RIGHT BACK - A,B
- 3 LEFT BACK - A,B
- 4 LEFT YOKE - A
- 5 RIGHT YOKE - A
- 6 FRONT FACING - A,B
- 7 BACK FACING - A,B
- 8 GUIDE FOR ELASTIC - A,B
- 9 RIGHT FRONT - C
- 10 RIGHT FRONT FACING - C
- 11 LEFT FRONT - C
- 12 BACK - C
- 13 KNOT - C

The Pattern

- SYMBOLS**
- GRAIN LINE Place on straight grain of fabric parallel to selvage
- PLACE SOLID LINE on fold of fabric.
- CENTER FRONT OR BACK of garment.
- NOTCHES
- DOTS
- CUTTING LINE
- LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
Make adjustments before placing pattern on fabric.



When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

General Directions

Cutting/Marking

BEFORE CUTTING:
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.


CIRCLE your cutting layout.
PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING:
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.



Sewing

- SEW garment following **Sewing Directions**.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.

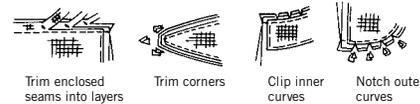


SPECIAL CUTTING NOTES


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.




✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).



Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE


ALL VIEWS SIZED FOR STRETCH KNITS ONLY

DRESS A


USE PIECES 1 2 3 4 5 6 7

PIECE 8 IS CUT OF ELASTIC

60" (150CM) WITH NAP
SIZES 8 10 12 14 16 18 20

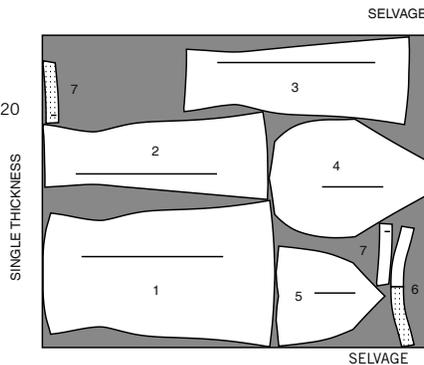


60" (150CM) WITH NAP
SIZES 22 24 26

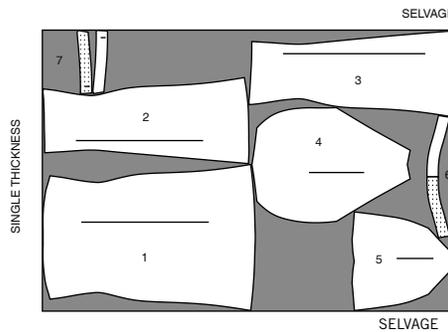

INTERFACING A,B

USE PIECES 6 7

20" (51CM) ALL SIZES




DRESS B

USE PIECES 1 2 3 6 7


PIECE 8 IS CUT OF ELASTIC

60" (150CM) WITH NAP
SIZES 8 10 12 14

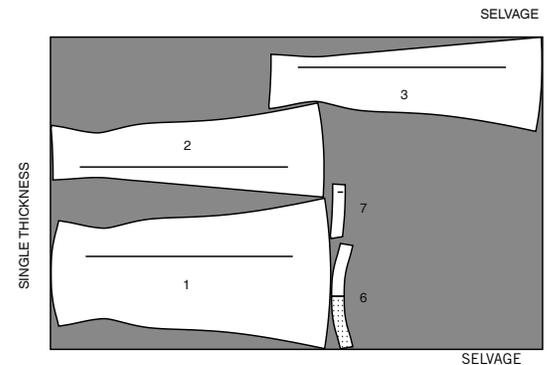


CUTTING LAYOUTS CONTINUED ON PAGE 2

60" (150CM)
WITH NAP
SIZES 16 18 20 22 24 26

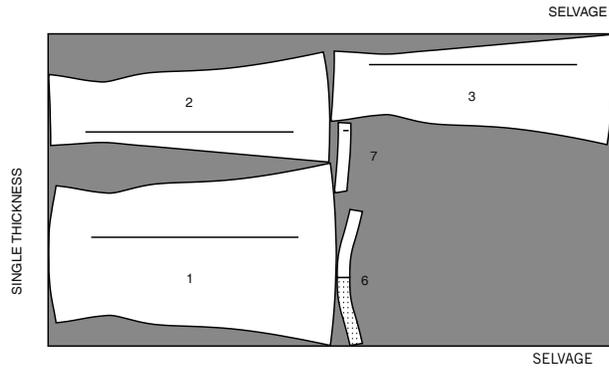**SHRUG C**

USE PIECES 9 10 11 12 13

60" (150CM)
WITH NAP
ALL SIZES

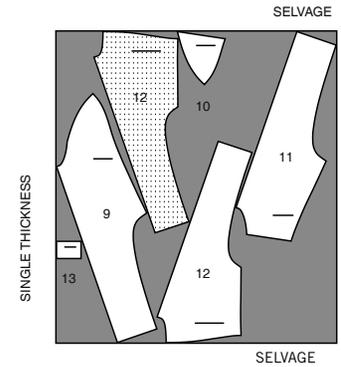**Sewing Directions**

FABRIC KEY

Read **General Directions** on page 1 before you begin.

SIMPLY THE BEST SEWING TECHNIQUES...**FOR KNITS**

- Use a ball point or stretch needle.
- Stretch knits need seams that are supple enough to "give" with the fabric. You can sew them with straight stitches (stretching the fabric slightly as you sew), narrow zig-zag stitches or one of the stretch stitches built into many conventional machines, or on your serger.
- Some knits require very little or no pressing while sewing. Use the appropriate temperature setting. Press lightly or use steam.
- To prevent shoulder seams from stretching, pin center of hem tape, clear elastic, or twill tape along seam line on front shoulder edges, then stitch the shoulder seams.
- Hems can be stitched in place 1/4" (6mm) from raw edge.
- Raw edges of hem and facings are left raw, unless using a serger.

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:




GATHER- see "sewing two rows gathers" video.

NARROW HEM- see "sewing narrow hems" video.

INVISIBLE ZIPPER- see "sewing an invisible zipper" video.

TRIM- see "how to trim, clip, and layer seams" video.

UNDERSTITCH- see "how to understitch" video.

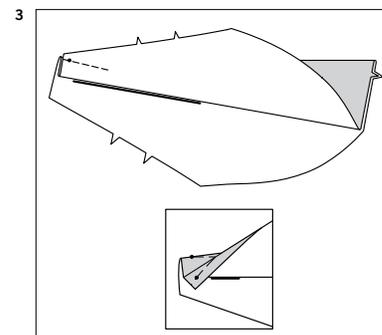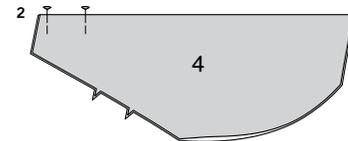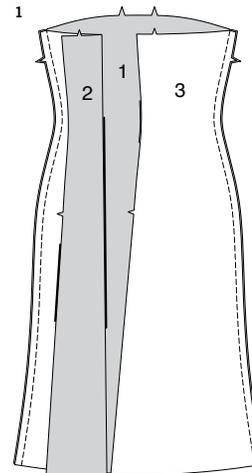

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

DRESS A, B


1. Stitch left back (2) and right back (3) to front (1) at side seams.

YOKES A


2. Fold left yoke (4) in half along foldline with **WRONG** sides together. Place a few pins perpendicular to fold at narrow end, as shown.
3. With **RIGHT** sides together, fold left yoke through center of pleat, bringing small dots and broken pleat lines together, as shown. Stitch along broken lines through all thicknesses.

S9820

3 of 4

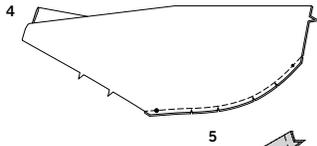


5

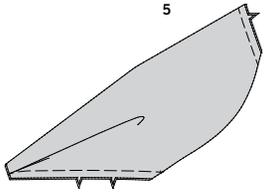


4. With RIGHT sides together and raw edges even, pin curved edges together, matching small dots and large dots. Stitch curved edges together.
TRIM seam.

5. Turn left yoke RIGHT side out.
With WRONG sides together and raw edges even, baste long raw edges together, matching centers front and notches; baste.
This side will now be referred to as the TOPSIDE.

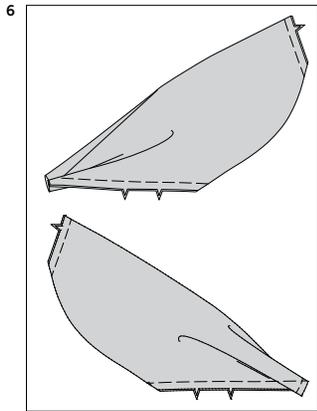


6. Have the left yoke TOPSIDE up, as shown.
Fold yoke along foldline; a new fold will form on the UNDERSIDE.
Trim end of new fold even with yoke so that raw edges are even.
Baste remaining raw edges together, as shown.

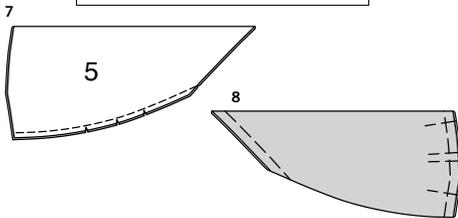


7. Fold right yoke (5) in half along foldline with RIGHT sides together, having raw edges even. Stitch curved edges together.
Trim seam; clip curves.


8. Turn yoke RIGHT side out. Baste raw edges together.
Hand-baste along solid and broken lines through both thicknesses.

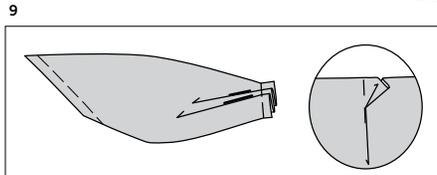


9. To make each pleat on right yoke, on OUTSIDE, fold along solid line. Bring fold to broken line. Baste across raw edges.

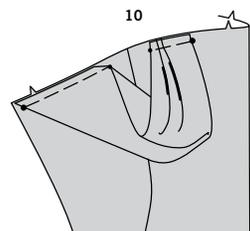

10. On OUTSIDE, pin raw edges of right yoke to RIGHT front and back, matching small and large dots; baste.

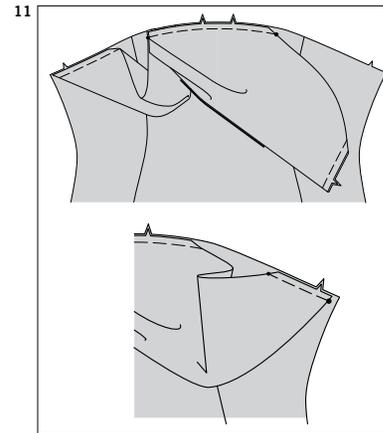

11. On OUTSIDE, pin front edge of left yoke to front (over ends of right yoke), matching centers front, notches, and small dots; baste.
Pin back edge of left yoke to LEFT back, matching small dots and large dots, being careful to clear center back seam allowance.
Baste.

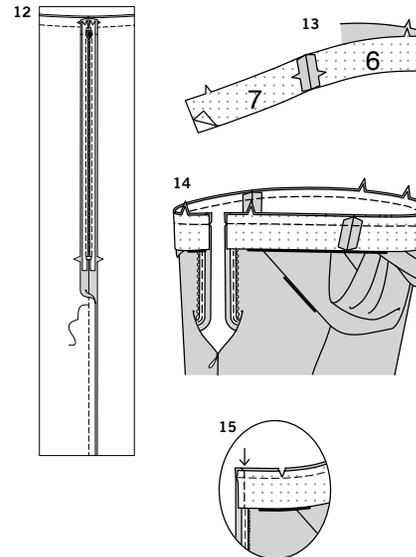

CONTINUE AS FOLLOWS FOR VIEWS A, B

12. Using an invisible zipper foot, insert **INVISIBLE ZIPPER** in back opening edges, having top stop 3/4" (2cm) below upper raw edge and sewing center back seam together below zipper when done.


13. Apply interfacing to WRONG side of front facing (6) and back facing (7) sections, following manufacturer's directions.
Stitch side seams of facing sections.

14. Open out center back opening edges of back, rolling zipper teeth away from the opening edge. With RIGHT sides together and raw edges even, pin facing to upper edge (over yokes for View A), matching centers and side seams. Stitch upper edge. **TRIM** seam.


15. Pin back opening edges together. Using an adjustable zipper foot, stitch 1/2" (1.3cm) from back edges, keeping zipper teeth free.



16. Cut one piece of elastic the length of guide for elastic (8).
Transfer markings to elastic using a washable fabric marking pen or pencil.
Make a mark 1" (1.5cm) away from each end of elastic.

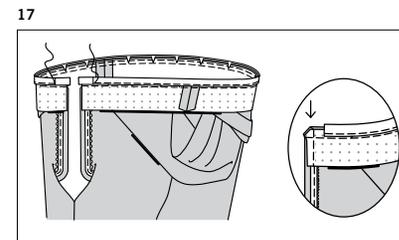


17. On WRONG side, pin elastic over seam allowance, having lower edge close to seam stitching, raw edges even, and small dots at side seams, matching centers.
Stitch elastic close to lower edge between 1" (2.5cm) marks, stretching elastic as you sew, being careful not to stitch into seam. Back-stitch at end markings to secure elastic in place.
TRIM free ends of elastic and back corners of dress and facing; do not trim center back edges.

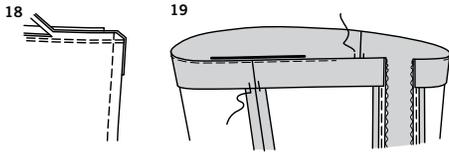


18. Trim seam allowance on **UNDERSIDE** of elastic to 1/4" (6mm) of elastic stitching, being careful not to cut into facing and dress.

19. Turn facing and back edges to **INSIDE**, turning out yokes for View A.
UNDERSTITCH facing as far as possible.
To keep the facing from rolling to **OUTSIDE**, secure it at the seam allowances by tacking it by hand.

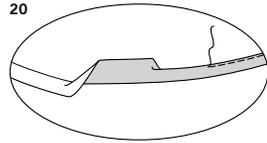


20. Mark length.
Press up hem along marking.
Mark depth of hem to 5/8" (1.5cm); trim evenly.
To make a 5/8" (1.5cm) **NARROW HEM**, tuck under raw edge to meet crease. Press and stitch in place.


JACKET C

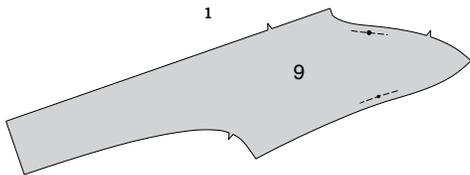

1. To reinforce right front (9), stitch along seam line for about 1" (2.5cm) on each side of large dot, stitching through large dot. Reinforce seam line on each side of small dot in same manner, stitching through small dot.

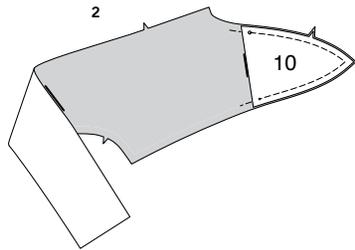


2. With **RIGHT** sides together, pin right front facing (10) to right front, matching small and large dots, having seam line along stitching line.
Stitch upper and lower edges together, pivoting with need in fabric at point.

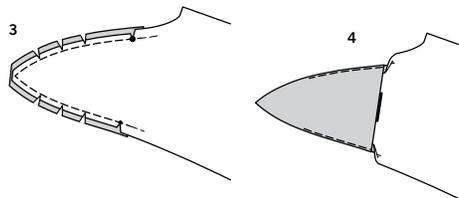


3. Clip seam allowance on right front to stitching at small and large dot, being careful not to clip through stitching.
TRIM seam allowance between clips, being careful not to clip through stitching.


4. **UNDERSTITCH** facing as far as possible.
Turn facing to **INSIDE**. Finger or lightly press.

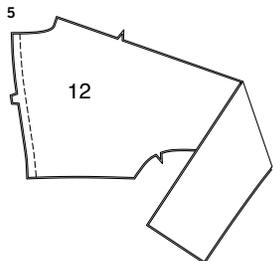

5. Stitch center back seam of back (12) sections.

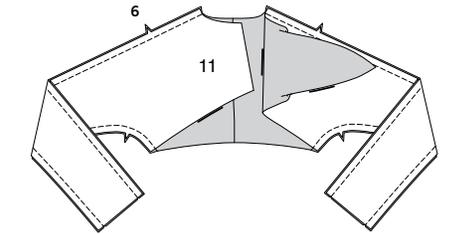


6. Pin right front to **RIGHT** back at shoulders and entire underarm seam. Stitch seam.
Pin left front (11) to **LEFT** back at shoulders and entire underarm seam.
Stitch seam.

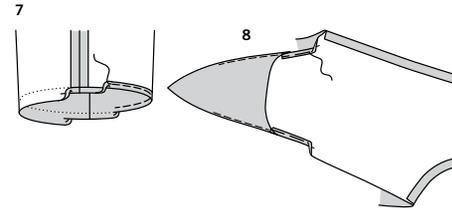


7. Press under 5/8" (1.5cm) hem allowance on lower edge of sleeve.
To form **NARROW HEM**, tuck under raw edge to meet crease.
Press and stitch in place.


8. Pin up **NARROW HEM** as far as clips for about 2" (5cm) inches; hand-baste in place along stitching line, keeping facing free.



9. Turn facing back in place, placing raw edge along solid line.
Hand-baste facing in place along stitching line.

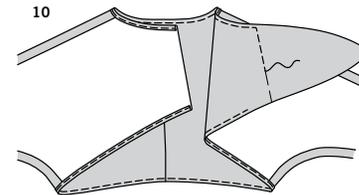


10. Stitch **NARROW HEM** on remaining raw edges, pivoting with needle in fabric at basting to stitch across facing, as shown.

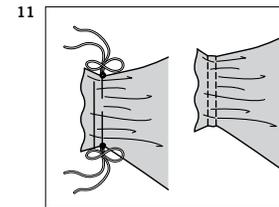


11. **GATHER** front edge of left front between small dots.
Pull up gathers to measure 1-3/4" (4.5cm) between small dots.
Tie thread ends in figure 8" s to secure.
Machine-stitch along both rows of gathering stitches.

12. Stitch long edge of knot (13) in a 3/8" (1cm) seam.
Turn knot **RIGHT** side out; finger or lightly press.
Bring seam to center, having small dots at side edges. Baste across each ends.

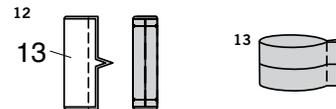

13. Stitch ends of knot together in a 3/8" (1cm) seam, forming a circle.
Press seam open or to one side.
If you prefer, turn under ends of seam allowance at an angle and hand-tack to knot.

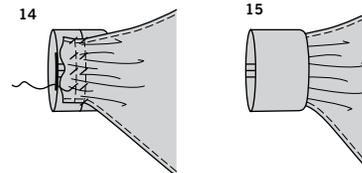

14. Pin **WRONG** side of gathered edge to **WRONG** side of knot, centering gathers over seam. Hand-sew in place neatly along gathering rows, keeping knot in a circle.

15. Turn knot over **RIGHT** side out, over gathered edge.

When wearing shrug, insert end of right front through knot, as shown on envelope.



Congrats!

You've completed your sewing adventure

SHARE YOUR LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at **simplicity.com**

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.