

S9827

**Simplicity**



Average

**WOMEN'S PANTS IN TWO LENGTHS, CAMISOLE AND CARDIGAN**

**Suggested Fabrics:** A,B: Cotton Blends, Gabardine, Linen Blends, Satin, Stretch Wovens, Twill, Wool Blends. C: Silky Types. D: Stretch Knits only such as Jersey, Ponte, Rib Knit, Sweater Knits. See Pick-A-Knit® Rule. **Interfacing:** Lightweight Fusible.

**Notions:** A,B: 9" (23cm) zipper (cut to fit), two hooks and bars. D: Three ¾" (2cm) buttons.

Sizes	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
European	46	48	50	52	54	56	58	60	62	64

**BODY MEASUREMENTS: Select pattern size based on body measurements**

<b>Bust</b>	42	44	46	48	50	52	54	56	58	60	Ins.
<b>Waist</b>	35	37	39	41½	44	46½	49	51½	53	54½	"
<b>Hip-9" below waist</b>	44	46	48	50	52	54	56	58	60	62	"
<b>Back-neck to waist</b>	17½	17%	17½	17%	17¾	17%	18	18%	18¼	18%	"

<b>Pants A</b>	45**	3%	3%	3%	3%	3½	3%	4¼	4½	4½	Yds.
	60**	2%	2%	2%	2%	2¾	2¾	2¾	2¾	2¾	"

**Lining A,B** - 45\*\* - ½ yd. **Interfacing A,B** - 20" - ¾ yd.

<b>Pants B</b>	45**	2¾	2¾	2¾	2¾	3	3¼	3¼	3¾	3¾	Yds.
	60**	2¼	2¼	2¼	2¼	2%	2%	2%	2%	2%	"

<b>Camisole C</b>	45**	1%	1%	1¼	1¼	1¼	1%	1%	2	2¼	Yds.
	60**	1%	1%	1¼	1¼	1%	1%	1%	2	2	"

**Interfacing** - 20" - 1 yd.

<b>Cardigan D</b>	60**	1¾	1¾	1¾	1¾	2%	2%	2%	2%	2%	Yds.
-------------------	------	----	----	----	----	----	----	----	----	----	------

**NOTE:** Please refer to the sewing instructions for **FINISHED GARMENT MEASUREMENTS**.

\*with nap \*\*without nap

Average

**PANTALON EN DEUX LONGUEURS, CAMISOLE ET CARDIGAN POUR FEMMES**

**Tissus Conseillés:** A,B: Cotonnades, Gabardine, Lin mélangés, Satin de coton, Tissus tissés extensibles, Twill, Mélanges de laine. C: Tissus soyeux. D: Seulement pour tricotés extensibles tels que Jersey, Ponte, Tricot à côtes, Tricotés pour chandails. Voyez la Règle-Pour-Choisir-Un-Tricot®. **Entoilage:** Thermocollant léger.

**Mercerie:** A,B: Fermeture à glissière de 18cm (coupée pour ajuster), 2 agrafes. D: 3 boutons de 2cm.

Tailles	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
Françaises	48	50	52	54	56	58	60	62	64	66
Européen	46	48	50	52	54	56	58	60	62	64

**MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps**

<b>Poitrine</b>	107	112	117	122	127	132	137	142	147	152	cm
<b>Taille</b>	89	94	99	105	112	118	124	130	134	138	"
<b>Hanches (23cm au-dessous de la taille)</b>	112	117	122	127	132	137	142	147	152	157	cm
<b>Dos du cou à la taille</b>	44	44	44.5	45	45	45.5	46	46	46.5	47	"

<b>Pantalon A</b>	115cm*	2.7	2.9	2.9	2.9	2.9	3.2	3.2	3.9	4.1	4.1	m
	150cm*	2.4	2.4	2.4	2.4	2.4	2.5	2.5	2.5	2.5	2.5	"

**Doublure A,B** - 115cm\*\* - 0.5m. **Entoilage A,B** - 51cm - 0.8m

<b>Pantalon B</b>	115cm*	2.5	2.5	2.5	2.6	2.7	2.9	3.0	3.4	3.4	3.5	m
	150cm*	2.1	2.1	2.1	2.2	2.2	2.2	2.2	2.2	2.2	2.2	"

<b>Camisole C</b>	115cm*	1.5	1.5	1.5	1.6	1.6	1.7	1.7	1.8	1.9	2.1	m
	150cm*	1.0	1.0	1.1	1.1	1.3	1.7	1.7	1.7	1.8	1.8	"

**Entoilage** - 51cm - 0.9m

<b>Cardigan D</b>	150cm*	1.6	1.6	1.6	1.6	1.8	1.9	1.9	1.9	2.2	2.2	m
-------------------	--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

**NOTE:** S'il vous plaît, reportez-vous aux instructions de couture pour les **MESURES DU VÊTEMENTS FINI**.

\*avec sens \*\*sans sens



Use the 1 inch (2.54cm) box to ensure you are using rule at 100%

Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.

**PICK-A-KNIT® RULE**


FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE  
POUR CE PATRON - LE JERSEY DOIT S'ETIRER DANS LA LARGEUR DE 4" (10 cm) DEPUIS ICI  
PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO ANCHO POR 4" (10 cm) DESDE AQUI

TO HERE 35%  
JUSQUE LA 35%  
HASTA ALLA 35%


When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.  
Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.  
Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

# Simplicity

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

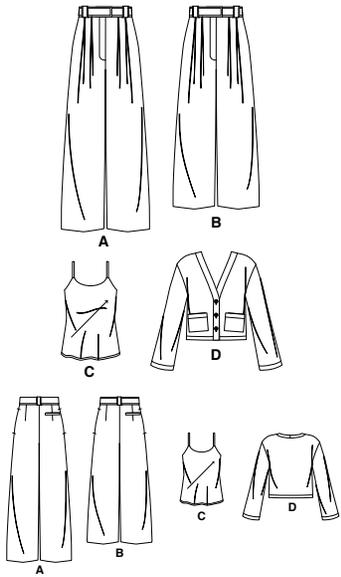

20 PIECES

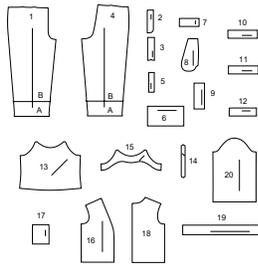

- 1 FRONT - A,B
- 2 RIGHT FLY FACING - A,B
- 3 LEFT FLY - A,B
- 4 BACK - A,B
- 5 WELT - A,B
- 6 BACK POCHE-A,B
- 7 WELT FACING - A,B
- 8 POCKET - A,B
- 9 CARRIERS - A,B
- 10 RIGHT FRONT WAISTBAND - A,B
- 11 LEFT FRONT WAISTBAND - A,B
- 12 BACK WAISTBAND - A,B
- 13 FRONT AND BACK - C
- 14 SHOULDER STRAP - C
- 15 FRONT AND BACK FACING - C
- 16 FRONT - D
- 17 POCKET - D
- 18 BACK - D
- 19 NECKBAND - D
- 20 SLEEVE - D

Sizes	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
European	46	48	50	52	54	56	58	60	62	64

**FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)**

C Bust	45	47	49	51	53	55	57	59	61	63	Ins.
D Bust	48½	50½	52½	54½	56½	58½	60½	62½	64½	66½	*
A,B Waist	37	39	41	43	45	47	49	51	53	55	*
C Waist	44	46	48	50	52	54	56	58	60	62	*
D Waist	48½	50½	52½	54½	56½	58½	60½	62½	64½	66½	*
A,B Hip	54	56	58	60	62	64	66	68	70	72	*
Width, each leg											
Pants A	25	25½	26	26½	27	27½	28	28½	29	29½	Ins.
Pants B	27	27½	28	28½	29	29½	30	30½	31	31½	*
Width, lower edge											
Camisole C	45	47	49	51	53	55	57	59	61	63	Ins.
Cardigan D	48½	50½	52½	54½	56½	58½	60½	62½	64½	66½	*
Finished back length from base of neck											
Camisole C	21¾	22	22½	22¾	23	23¼	23½	23¾	24	24	Ins.
Cardigan D	22¾	23	23¼	23¾	24	24¼	24½	24¾	25	25	*
Finished side length from waist											
Pants A	41¾	42	42¼	42¾	43	43¼	43½	43¾	44	44	Ins.
Pants B	35¾	36	36¼	36¾	37	37¼	37½	37¾	38	38	*

## The Pattern

- SYMBOLS**
- ↔ GRAIN LINE Place on straight grain of fabric parallel to selvage
  - ▬ PLACE SOLID LINE on fold of fabric.
  - - - CENTER FRONT OR BACK of garment.
  - ∇ NOTCHES
  - ° ○ DOTS
  - CUTTING LINE
  - ▬▬ LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

## ADJUST IF NEEDED

Make adjustments before placing pattern on fabric.

**TO LENGTHEN:** Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

**TO SHORTEN:** At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

## General Directions

## Cutting/Marking

**BEFORE CUTTING:** PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables. CIRCLE your cutting layout. PIN pattern to fabric as shown in Cutting Layouts.

**AFTER CUTTING:** Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


**To Quick Mark:**

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.



## Sewing

- SEW garment following Sewing Directions.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.




## SPECIAL CUTTING NOTES

★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.

✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).

Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).

## Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE


### PANTS A

USE PIECES 1 2 3 4 5 6 7 8 9 10 11 12


45" (115CM) WITH NAP SIZES 20W 22W 24W 26W 28W CUT ONE OF PIECES 3 7

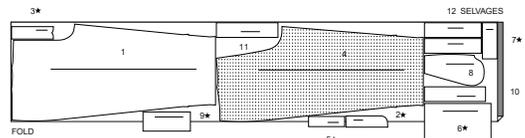

45" (115CM) WITH NAP SIZES 30W 32W 34W 36W 38W CUT ONE OF PIECES 2 3 5 6 7 9

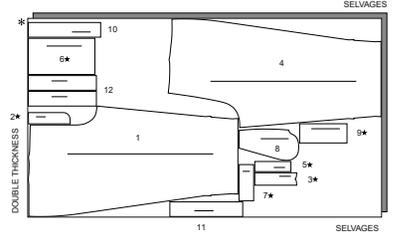


60" (150CM) WITH NAP ALL SIZES CUT ONE OF PIECES 2 3 5

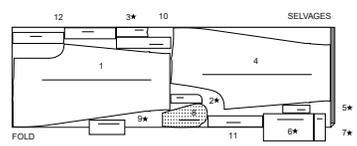

### LINING A,B

USE PIECE 8


45" (115CM) WITHOUT NAP ALL SIZES



### INTERFACING A,B

USE PIECES 2 3 5 9 10 11 12


20" (51CM) ALL SIZES

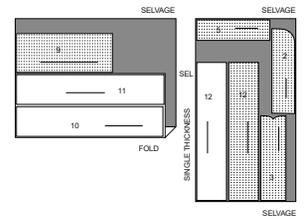


### PANTS B

USE PIECES 1 2 3 4 5 6 7 8 9 10 11 12


45" (115CM) WITH NAP SIZES 20W 22W 24W 26W 28W CUT ONE OF PIECES 2 7

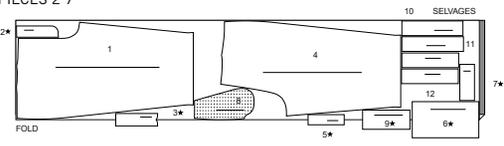

45" (115CM) WITH NAP SIZES 30W 32W 34W 36W 38W CUT ONE OF PIECES 2 3 5 6 7 9

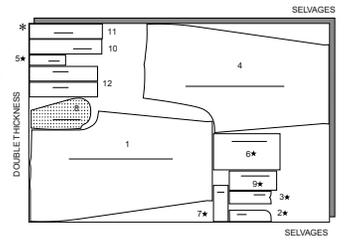


60" (150CM) WITH NAP ALL SIZES CUT ONE OF PIECES 2 3 5 9

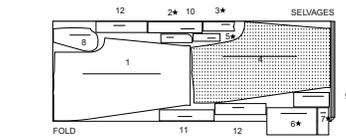

### CAMISOLE C

USE PIECES 13 14 15

45" (115CM) WITH NAP ALL SIZES

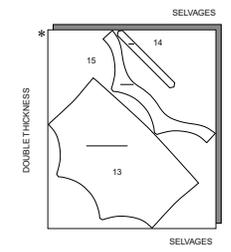


CUTTING LAYOUTS CONTINUED ON PAGE 2


**S9827**

2 of 4

60" (150CM)  
WITH NAP  
SIZES 20W 22W 24W 26W 28W




60" (150CM)  
WITH NAP  
SIZES 30W 32W  
34W 36W 38W

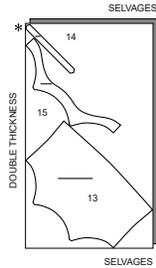

**INTERFACING C**

USE PIECE 15

20" (51CM)  
ALL SIZES

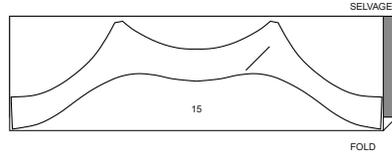


**CARDIGAN D- SIZED FOR STRETCH  
KNITS ONLY**


USE PIECES 16 17 18 19 20

TO REINFORCE BUTTONHOLES USE SMALL PIECE OF  
INTERFACING REMNANT

60" (150CM)  
WITH NAP  
SIZES 20W 22W  
24W 26W

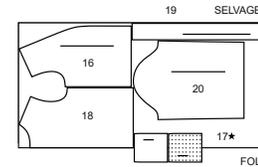

60" (150CM)  
WITH NAP  
SIZES 28W 30W 32W 34W 36W 38W

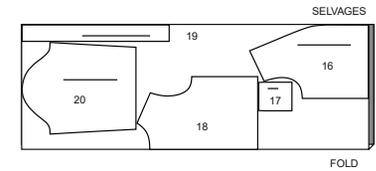

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at [simplicity.com/sewingtutorials](http://simplicity.com/sewingtutorials)

**Sewing Directions**



Read **General Directions** on page 1 before you begin.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR

- FRONT FLY ZIPPER** - see "Sewing a fly front zipper" video.
- STAYSTITCH** - see Machine Stitches: "how to stay-stitching" video.
- TOPSTITCH** - see Machine Stitches: "how to topstitch" video.
- DOUBLE-STITCH** - see Machine Stitches: "how to double-stitch" video.
- UNDERSTITCH** - see Machine Stitches: "how to understitch" video.
- FINISH** - see Seams: "how to finish seam allowances" video.
- SLIPSTITCH** - Slide needle through a folded edge, then pick up a thread of underneath fabric.





**PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.**

**STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.**

**PANTS A, B**


**FRONT AND BACK**

- 1.** Apply INTERFACING to right fly facing (2) and left fly (3), following manufacturer's directions. Apply **FLY FRONT ZIPPER** to front (1), using right fly facing and left fly.
- 2.** To make pleats in front, on **OUTSIDE**, fold along solid lines. Bring folds to broken line; pin. Baste upper edges and along pleat folds. Press. Remove pleat fold basting.
- 3.** With **RIGHT** sides together, pin pocket (lining) (8) section to each front section matching large dots, having raw edges even. Stitch in 3/8" (1cm) seam.
- 4.** Press seam toward pocket, pressing pocket out.

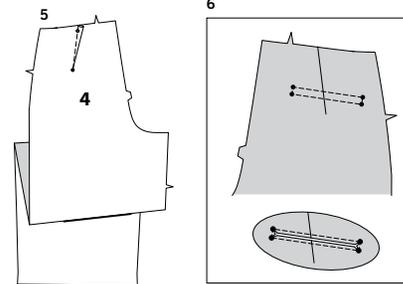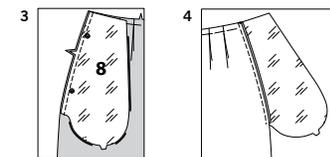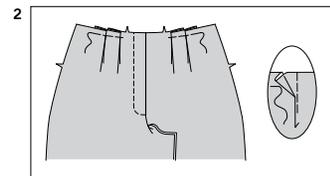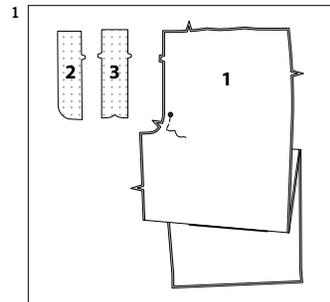


**5.** Stitch **DART** in back (4). Press dart toward center.

**6.** To reinforce stitching line for welt and pocket, stitch along stitching lines in right back, stitching through small dots. Slash between stitching lines to within 1/2" (1.3cm) of corners. Clip diagonally to small dots at inner corners, being careful not to clip through stitching.

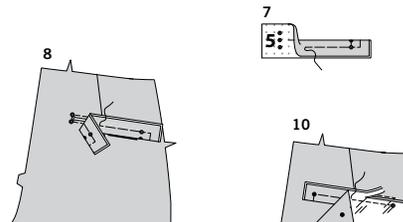


**7.** Apply INTERFACING to welt (5). Fold welt in half, lengthwise, with **WRONG** sides together; press. Machine-baste raw edges together 5/8" (1.5cm) from long edges and ends.

**8.** On **OUTSIDE**, pin welt to lower welt/pocket opening, matching small dots, placing basting along stitching lines. Baste along stitching line between small dots.

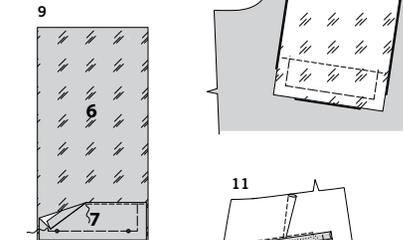


**9.** Press under seam allowance on lower edge of welt facing (7). With **RIGHT** sides up, pin welt facing to back pocket (6), matching small dots, having raw edges even. **EDGESTITCH** pressed edge. Baste raw edges.

**10.** With **RIGHT** sides together, pin lower edge of back pocket (6) to right back (over welt), matching small dots and stitching lines. Stitch along stitching line between small dots, through all thicknesses. Trim upper edges of welt and pocket even with lower pocket opening.

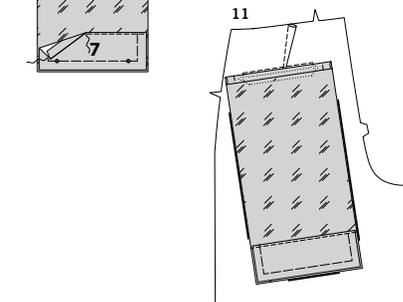

**11.** Turn pocket and clipped corners to **INSIDE** through slash; press.

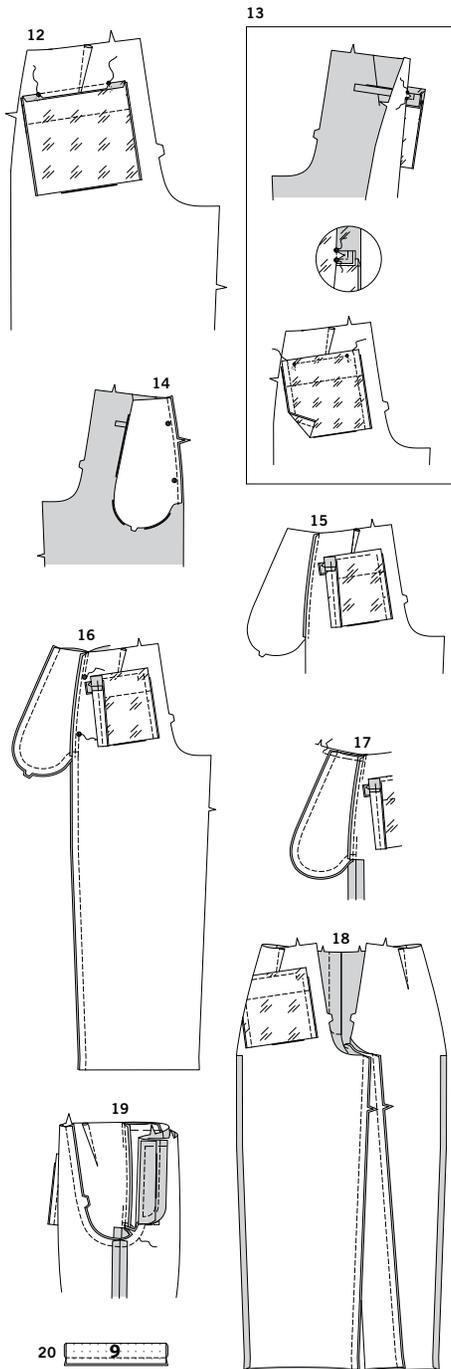

**12.** Fold pocket along fold line and pin upper edge to upper pocket opening, matching small dots and stitching lines. Stitch along stitching line, between small dots; back-stitch at small dots.

**13.** Pin side edges of pocket and welt together, matching small dots and placing seam lines along stitching lines on triangular ends. Stitch, catching ends of welt and triangular ends in stitching. Stitch pocket edges together, as shown.

**14.** With RIGHT sides together, pin pocket (fabric) (8) section to each back section matching large dots, having raw edges even. Stitch in 3/8" (1cm) seam, keeping back pocket free.

**15.** Press seam toward pocket, pressing pocket out.

**16.** With RIGHT sides together, pin front to back at side seams, matching large dots. Stitch side seams, leaving an opening between large dots. Stitch pocket edges together from side seam to upper edge. Clip pants back seam allowance below pocket.


**17.** Press seam open below clips. Press pocket toward front. Baste upper edge of pocket to front close to upper edge.

**18.** Stitch front to back at inner leg seams.

**19.** With RIGHT sides together, insert one leg INSIDE the other. With RIGHT sides together, pin center seam, matching inner leg seams and notches. Stitch, connecting with previous stitching. REINFORCE seam.

#### CARRIERS, WAISTBAND AND FINISHING

**20.** Apply INTERFACING to carrier (9). With RIGHT sides together, fold carriers in half, lengthwise, having raw edges even. Stitch, leaving ends open. Trim.

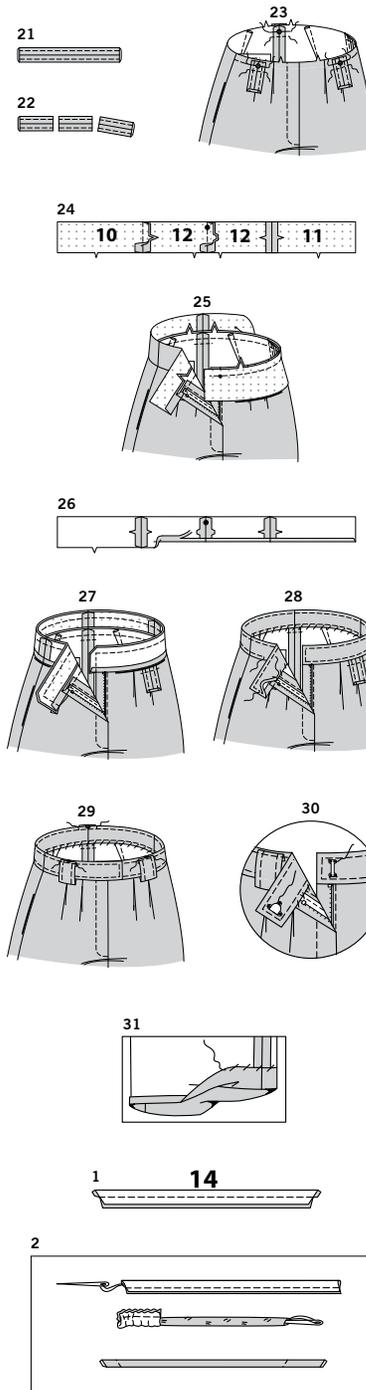

**21.** Turn RIGHT side out, bringing seam to center; press. TOPSTITCH side edges.

**22.** Cut carriers into three sections, each 3 1/2" (8.9 cm) long.

**23.** On OUTSIDE in carriers to upper edge of pants, centering one end over large dots, having raw edges even. Baste along waist seamline. Stitch carriers in place 1/2" (1.3cm) below basting. Turn in 1/4" (6mm) on remaining ends; press.

**24.** Apply INTERFACING to right front waistband (10), left front waistband (11) and back waistband (12) sections. Stitch interfaced back waistband sections together at center back seam, matching notches and large dots. NOTE: Uninterfaced waistband sections will be used as facing. Stitch right waistband and left waistband to back waistband at sides.

**25.** With RIGHT sides together, pin waistband to upper edge of pants, matching centers, notches and seams. Stitch. Trim seam. Press seam toward waistband, pressing in remainder of seam allowance on of right waistband extension, as shown.

**26.** Stitch back waistband facing sections together at center back seam, matching notches and large dots. Stitch right waistband facing and left waistband facing to back waistband facing at sides. Press under seam allowance on lower notched edge of waistband facing. Trim pressed seam allowance to 3/8" (1cm).

**27.** With RIGHT sides together, pin waistband facing to waistband, matching centers and seams. Stitch front and upper edges. Trim seam.

**28.** Turn facing to INSIDE. Press. SLIPSTITCH pressed edge over seam and extension edges together. TOPSTITCH waistband, as shown.

**29.** Turn up carriers over waistband. Pin pressed edges to waistband, centering over large dots. Stitch in place close to pressed edges, through all thicknesses.

**30.** Sew hook and bar to waistband, as shown.


**31.** Turn up 1 1/4" (3.2cm) hem on lower edge of pants. Turn 1/4" (6mm) on raw edge of hem to wrong side; press. Hand-sew in place.

#### CAMISOLE C

##### FRONT AND BACK


**1.** With RIGHT sides together, fold shoulder strap (14) in half lengthwise. Stitch in a 3/8" (1cm) seam, leaving ends open.

**2.** With a needle, attach a strong thread to stitched end of strap. Draw needle eye forward, through fold, turning strap RIGHT side out. Baste ends.

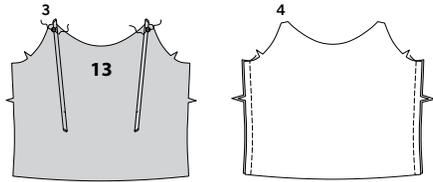


3. For back, on **OUTSIDE**, pin straps to one front and back (13) section, as shown, matching large dots. Baste.

4. Stitch front and back sections together at side seams.

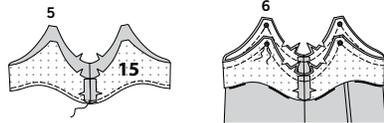


5. Apply **INTERFACING** to front and back facing (15). Stitch front and back facing sections together at sides. **FINISH** lower edge of facing.

6. With **RIGHT** sides together, pin facing to front and back, matching centers and large dots. Stitch upper edges, leaving front open from 1/4" (6mm) on each side of large dots, as shown. Trim seam.

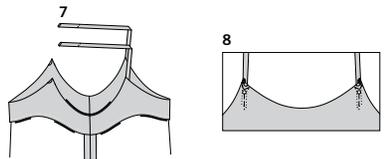


7. Turn facing to **INSIDE**. Press.




8. Insert remaining ends of straps through openings in front, matching large dots. Pin in place. Try on camisole and adjust straps to fit.

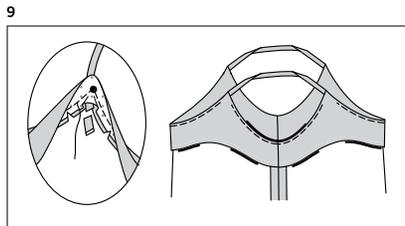

9. Open out facing. Stitch openings in front. Trim away excess strap. **UNDERSTITCH** facing as far as possible. Turn down facing.



10. Allow camisole to hang overnight. Mark length. Press up hem along marking. Mark depth of hem; trim evenly. To form narrow hem, tuck under raw edge to meet crease. Press. Stitch hem in place.



## CARDIGAN D


*NOTE: For knit fabrics stay-stitching is optional.*

### FRONT AND BACK

1. Press under 1/4" (6mm) on upper edge of pocket (17). Turn upper edge to **OUTSIDE** along fold line, forming facing. Stitch along seam line on raw edges. Trim seam allowance in the facing area to 1/4" (6mm).


2. Turn corners **RIGHT** side out, turning facing to the **WRONG** side; press, pressing under raw edges along stitching, diagonally folding corners. Stitch facing close to inner pressed edge.

3. On **OUTSIDE**, pin one pocket to each front (16) section, matching large dots. Stitch close to side and lower edges.




4. **STAYSTITCH** neck edge of back (18).

Stitch front sections to back at shoulders and sides in **DOUBLE-STITCHED** seams. Press seams toward back.



5. Turn up 1 1/4" (3.2cm) hem on lower edge of cardigan. Turn 1/4" (6mm) on raw edge of hem to wrong side; press. Stitch close to inner edge of hem.

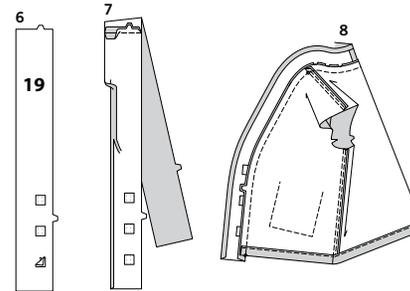


6. Cut three 1" (2.5cm) x 1" (2.5cm) remnants of fusible interfacing. To reinforce buttonholes, on **WRONG** side, center interfacing over buttonhole markings on right neck band (19) section. Fuse, following manufacturer's instructions.

7. Stitch neck band sections together at center back seam.


Press under seam allowance on long unnotched edge of neck band. Trim pressed seam allowance to 3/8" (1cm).

8. With **RIGHT** sides together, pin neck band to front and neck edges, matching centers and notches, placing small dots at shoulder seams, clipping to stay-stitching where necessary. Stitch, keeping pressed edge free, stretching neck band to fit. Trim seam. Press seam toward neck band.

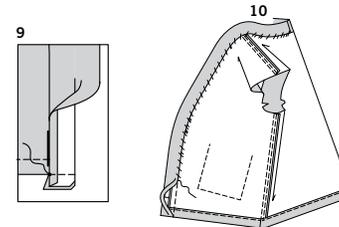

9. With **RIGHT** sides together, fold lower edges of neck band along foldline. Stitch ends. Trim seams.

10. Turn neck band to inside along foldline. Press. **SLIPSTITCH** pressed edge over seam.

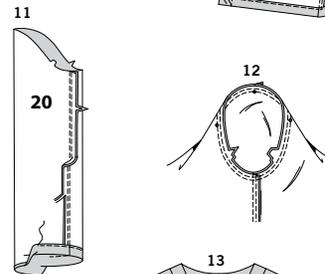


### SLEEVE AND FINISHING

11. Stitch sleeve (20) seam in a **DOUBLE-STITCHED** seam. Press seam toward back.

Turn up 1 1/4" (3.2cm) hem on lower edge sleeve. Turn 1/4" (6mm) on raw edge of hem to wrong side; press. Stitch close to inner edge of hem.

12. With **RIGHT** sides together, pin sleeve to armhole edge with center small dot at shoulder seam, matching notches and remaining small dots. Stitch. Stitch again 1/4" (6mm) away in seam allowance. Press seam toward sleeve.

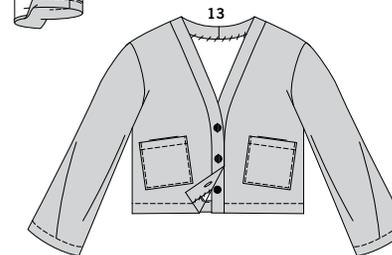

13. Make buttonholes in right front at markings. Lap opening edges, matching centers. Make button markings in left front. Sew buttons at markings.



# Congrats!

You've completed your sewing adventure

---

**SHARE  
YOUR** LOOK



Post your pattern and tag us  
**@simplicity\_creative\_group** and **#simplicitypatterns**  
for a chance to be featured on our social media.

Look for more PDF patterns at **simplicity.com**

Have a question or need help with your sewing project call us at  
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.