

S9833

Simplicity®

Madalynne



Scan QR code for a
Sew-Along tutorial
by Maddie Kulig



Use the 1 inch (2.54cm) box
to ensure you are using
rule at 100%

Utilisez la boîte de 2,54 cm
pour vous assurer d'utiliser
la règle à 100%.

Utilizar un cuadrado de 2,54 cm
para asegurarse de estar usando
la regla al 100%.

PICK-A-KNIT® RULE

FOR THIS PATTERN - 3" (7.5 cm) OF KNIT FABRIC MUST STRETCH LENGTHWISE FROM HERE
POUR CE PATRON - 3" (7.5 cm) DE JERSEY DOIVENT S'ETIRER DANS LA LONGUEUR D'ICI →
PARA ESTE PATRÓN - LAS MALLAS DEBEN ESTIRARSE A LO LARGO POR 3" (7.5 cm) DESDE AQUÍ

When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.
Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

Average Moins Facile

MISSES' AND WOMEN'S BRA, PANTY AND THONG

Suggested Fabrics: Stretch knits only such as Lightweight Lycra Knits, Stretch Lace, Stretch Mesh. See Pick-A-Knit® Rule. **Contrast** in Gauloon-edged lace (at least 9" wide). **Lining A:** Tricot. **Lining B,C:** Cotton Jersey Knit. **Padding A:** $\frac{1}{8}$ " (3mm) wide poly-laminate foam.

Notions: A: 1 $\frac{1}{2}$ yds. (1.5m) of $\frac{1}{4}$ " (1cm) foldover elastic, 2 $\frac{1}{2}$ yds. (2.4m) of $\frac{3}{4}$ " (2cm) foldover elastic, $\frac{1}{8}$ yd. (0.8m) of $\frac{1}{4}$ " (1cm) underwire bra channeling, pair of $\frac{1}{2}$ " - $\frac{3}{4}$ " (1.3cm - 2cm) shoulder strap elastic, pair of $\frac{1}{2}$ " - $\frac{3}{4}$ " (1.3cm - 2cm) bra rings and sliders, one 3 x 3 hook closure, one monowire. B,C: $\frac{1}{4}$ " (1cm) foldover elastic: 4% yds. (4.2m) for B; 4% yds. (4.4m) for C.

BRA AND PANTY SIZES - XS, S, M, L, XL, 2XL, 3XL, 4XL

Cup Sizes - A/B, C/D, E/F, G/H, I/J

Instructions for determining your perfect bra size can be found in the sewing
instructions.

Bra A: 60** - $\frac{3}{4}$ yd.

Contrast 1 (Cup Front, Cup Side Front): 9** - 1 $\frac{1}{2}$ yds.

Contrast 2 (Cup Front and Cup Side Front Underlays): 9** - 1 $\frac{1}{2}$ yds.

Lining A: 60** - $\frac{3}{4}$ yd.

Padding A: 29** - $\frac{1}{4}$ yd.

Panty B: 60** - $\frac{3}{4}$ yd.

Contrast 1 (Front): 60** - $\frac{3}{4}$ yd.

Contrast 2 (Upper Side Fronts): 9** - $\frac{3}{4}$ yd.

Lining B: 4" x 5" remnant

Thong C: 60** - $\frac{3}{4}$ yd.

Contrast 1 (Front): 60** - $\frac{3}{4}$ yd.

Contrast 2 (Upper Side Fronts): 9** - $\frac{3}{4}$ yd.

Contrast 3 (Upper Side Front Underlays): 9** - $\frac{3}{4}$ yd.

Lining C: 3" x 6" remnant

*with nap **without nap

SOUTIEN-GORGE, CULOTTE ET STRING POUR JEUNES FEMMES ET FEMMES

Tissus Conseillés: Seulement pour tricots extensibles tels que Tricots de lycra légers, Dentelle extensible, Tissus à mailles. Voir la Règle-Pour-Choisir-Un-Tricot®. **Contraste** en dentelle à bord de galon (au moins 23cm de large). **Doubleure A:** Tricot. **Doubleure B,C:** Tricot de jersey de coton. **Rembourrage A:** Mousse préformée en polyester de 3mm.

Mercerie: A: 1.5m d'élastique à replier de 1cm, 2.4m d'élastique à replier de 2cm, 0.8m de coulisse à armature pour soutien de 1cm, 1 paire de bretelles élastiques de 1.3cm - 2cm, 1 paire de régleurs soutien-gorge de 1.3cm - 2cm, 1 agrafe de 3 x 3, 1 mono armature. B,C: élastique à replier de 1cm: 4.2m pour B; 4.4m pour C.

TAILLES DE SOUTIEN-GORGE ET CULOTTE - TP/XS, P/S, M, G/L, TG/XL, 2TG/2XL,
3TG/3XL, 4TG/4XL

Tailles de bonnet - A/B, C/D, E/F, G/H, I/J

Vous pouvez trouver les instructions pour déterminer votre taille parfaite de bonnet
dans les instructions de couture.

Soutien-gorge A: 150cm* - 0.6m

Contraste 1 (Bonnet devant, Bonnet côté devant): 23cm* - 0.9m

Contraste 2 (Parties dessous Bonnet devant et bonnet côté devant): 23cm - 0.9m

Doubleure A: 150cm* - 0.6m

Rembourrage A: 74cm - 0.2m

Culotte B: 150cm* - 0.6m

Contraste 1 (Devant): 150cm* - 0.3m

Contraste 2 (Côtés devant supérieurs): 23cm* - 0.7m

Doubleure B: Coupon de 11cm x 13cm

String C: 150cm* - 0.7m

Contraste 1 (Devant): 150cm* - 0.3m

Contraste 2 (Côtés devant supérieurs): 23cm* - 0.7m

Contraste 3 (Parties dessous côté devant supérieur): 23cm - 0.7m

Doubleure C: Coupon de 8cm x 15cm



A




B



C

*avec sens **sans sens




1 of 4 **S9833**
Simplicity®

Thank you for purchasing this Simplicity pattern.
 We made every effort to provide you with a high quality product.



17 PIECES

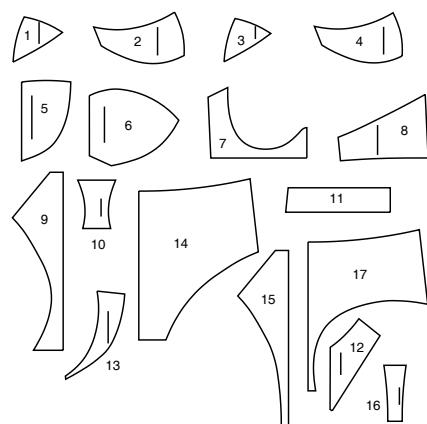

1 FRONT - A
 2 SIDE FRONT - A
 3 FRONT PADDING - A
 4 SIDE FRONT PADDING - A
 5 CUP FRONT - A
 6 CUP SIDE FRONT - A
 7 FRONT BAND - A
 8 BACK BAND - A
 9 FRONT - B
 10 CROTCH LINING - B
 11 UPPER FRONT - B,C
 12 UPPER SIDE FRONT - B,C
 13 LOWER SIDE FRONT - B,C
 14 BACK - B
 15 FRONT - C
 16 CROTCH LINING - C
 17 BACK - C

www.simplicity.com

info@simplicity.com

1-888-588-2700

General Directions

The Pattern

SYMBOLS

GRAIN LINE Place on straight grain of fabric parallel to selvege

PLACE SOLID LINE on fold of fabric.

CENTER FRONT OR BACK of garment.

NOTCHES

DOTS

CUTTING LINE

LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
 Make adjustments before placing pattern on fabric.

TO LENGTHEN: Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

TO SHORTEN: At lengthen or shorten lines, make an even peal taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

BEFORE CUTTING:

PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.

PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.

- FOR SINGLE THICKNESS: Place fabric RIGHT side up.

- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING:
 Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.




SPECIAL CUTTING NOTES


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.



Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.




Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



a. SELVAGE
 b. SELVAGES
 CROSSWISE FOLD

FIND YOUR PERFECT BRA SIZE

First, determine your bra size by measuring your chest at the fullest part of your breasts.




Full Bust Measurement
 (Around the Fullest Part of the Bust)

SIZE CHART - BAND SIZE - VIEW A		
Underbust Measurement (Ribcage)		
28" (71.12cm)	to	30" (76.2cm)
28" (71.12cm)	to	30" (76.2cm)
30" (76.2cm)	to	32" (81.3cm)
32" (81.3cm)	to	34" (86.4cm)
34" (86.4cm)	to	36" (91.4cm)
36" (91.4cm)	to	38" (96.5cm)
38" (96.5cm)	to	40" (101.6cm)
40" (101.6cm)	to	42" (106.6cm)
42" (106.6cm)	to	44" (111.7cm)
44" (111.7cm)	to	46" (116.8cm)

Then, measure your chest directly under your breasts, keeping the measuring tape snug and level. The difference between full bust measurement and underbust/rib cage measurement is your CUP size.

Follow the chart below:

To determine what size monowire to purchase, follow the chart below:



Underbust Measurement
 (Ribcage)

SIZE CHART - CUP SIZE - VIEW A		
Full Bust Measurement (Minus) and Underbust/Rib Cage		
1" (2.5cm)	to	2" (5cm)
3" (7.5cm)	to	4" (10cm)
5" (13cm)	to	6" (15.4cm)
7" (17.7cm)	to	8" (20.3cm)
9" (22.8cm)	to	10" (25.4cm)

SIZE CHART - MONOWIRE SIZE - VIEW A									
28	30	32	34	36	38	40	42	44	
A - B	80	80	85	90	95	100	105	110	110
C - D	85	85	90	95	100	105	110	115	115
E - F	90	90	95	100	105	110	115	120	125
G - H	95	95	100	105	110	115	120	125	125
I - J	100	100	105	110	115	120	125	130	130

NOTE: READ ALL CUTTING INFORMATION CAREFULLY BEFORE CUTTING FABRIC.

BRA PIECES 5,6, AND PANTY PIECE 12 ARE CUT FROM GALLOON EDGED LACE.

CUTTING GALLOON LACE PIECES

Study the pattern pieces 5, 6, and 12.

How do you want the scalloped edge to look at the front, and or front seam, when finished?


How closely can you match the scallop at a seam?

These questions can only be answered by you, as much depends on the length of the scallop of the galloon lace you chose and varies with the size of the garment you make.

Place pattern pieces on galloon lace with straight edge of pattern, aligned to inner edge of the scallops as shown in layout, or as you prefer.

TIP: If you prefer, cut pattern pieces out of a lightweight tag board or a cereal box. This will make it easy to trace, (or cut) around each, and to flip the pattern piece over to make the LEFT or RIGHT side of the garment.

Cut along remaining edges of pattern, using a rotary cutter if available.

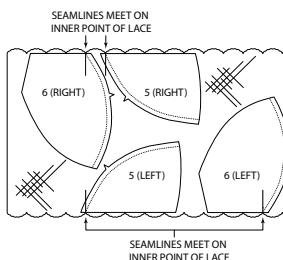

S9833

Cutting Layouts


2 of 4



PANTY B

USE PIECES 11 13 14


60" (150CM)
WITH NAP
ALL SIZES



B CONTRAST 1 (FRONT)

USE PIECE 9

60" (150CM)
WITH NAP
ALL SIZES




POSITION OF PATTERN PIECES MAY VARY
SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

ALL VIEWS ARE SIZED FOR STRETCH KNITS ONLY

BRA A

USE PIECES 1 2 7 8

60" (150CM)
WITH NAP
ALL SIZES




A CONTRAST 1 (CUP FRONT, CUP SIDE, FRONT)

FOR GALLOON EDGED TRIM - PLACE EDGE OF PATTERN PIECES 5 6
ALONG INNER CORNER
OF SCALLOPED EDGES,
AS SHOWN IN CUTTING LAYOUT.

USE PIECES 5 6

9" (23CM)
WITH NAP
ALL SIZES

FOR CONTRAST 2 FOLLOW
SAME LAYOUT

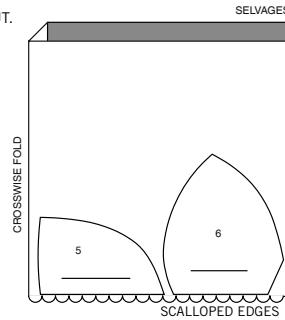


LINING A

USE PIECE 7 8

CUT TWO OF PIECE 8 ON RIGHT SIDE OF FABRIC
IN POSITION SHOWN


60" (150CM)
WITH NAP
ALL SIZES



PADDING A

USE PIECES 3 4


29" (74CM)
ALL SIZES



THONG C

USE PIECE 11 13 17


60" (150CM)
WITH NAP
ALL SIZES



C CONTRAST 1 (FRONT)

USE PIECE 15

60" (150CM)
WITH NAP
ALL SIZES



LINING C

CUT ONE OF PIECE 16 FROM TRICOT REMNANT

Sewing Directions

FABRIC KEY

RIGHT SIDE WRONG SIDE INTERFACING LINING LINING

Read **General Directions** on page 1 before you begin.

Bra Making with Madalynne

STITCHING

Stitch in 1/4" (6mm) seams unless otherwise noted and press all seams to side indicated.


Use a universal needle (size 14) when sewing channeling.

Use a ball point (size 12) or stretch needle for everything else.

DO NOT STRETCH THE FABRIC OR THE ELASTIC WHILE STITCHING UNLESS DIRECTED.

If using a serger, take into account that the seam allowances are only 1/4" (6mm).

FINGER PRESS all seams to side indicated. If using an iron, adjust temperature to a synthetic fabric setting, and test on a scrap of fabric first.

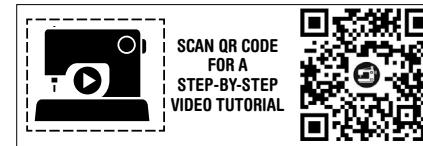


SCAN QR CODE
FOR A
STEP-BY-STEP
VIDEO TUTORIAL

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.


STITCH 1/4" (6MM) SEAMS WITH RIGHT SIDES TOGETHER
UNLESS OTHERWISE STATED.

BRA A


1. You have cut each cup front (5) and cup side front (6) in two types of galloon lace. Pin the WRONG side of your chosen OUTSIDE lace to the RIGHT side of your chosen inner lace. Baste a scant 1/4" (6mm) from straight edges, as shown. To keep galloon edges together until after the bra is complete, hand-baste across the upper edge between the seam allowances, as shown.

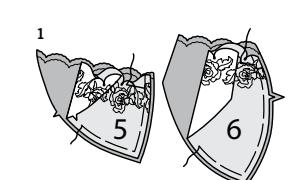


2. With RIGHT sides together and raw edges even, pin cup front to cup side front, matching small dots and notches. Stitch in a straight stitch, backstitching at beginning and end to reinforce the seam. Press seam toward cup side front. If you prefer, overlock (serge) seam allowances, OR stitch down with a zigzag stitch. This section will be referred to as cup.

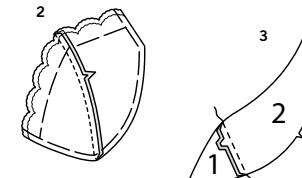

3. With RIGHT sides together and raw edges even, pin front (1) to side front (2) along double notched edge. Stitch in a straight stitch, backstitching at beginning and end to reinforce the seam. Press seam open. This section will be referred to as front.

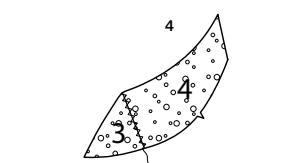


4. Butt inner edges of front padding (3) to side front padding (4). Stitch in a 1/8" (3mm) wide zigzag stitch, having stitches straddle the butt edges.

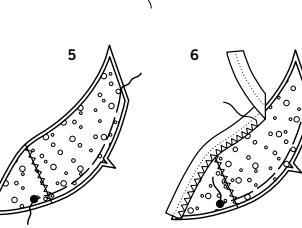


NOTE: Most Fold Over Elastic brands are reversible, having both a shiny side and a matte side. That gives you a chance to choose which looks better with your chosen fabric.

5. Pin the front to the padding with WRONG sides together, matching small dots and notches. Ease stitch notched edge to inner small dot, by stitching along the seamline, using long machine stitches.

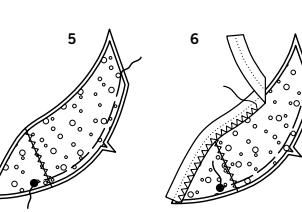


6. Cut a piece of 3/8" (1cm) wide fold over elastic the length of the upper edge of the front. On INSIDE, pin WRONG side of fold over elastic to upper edge of front (padding side), having inner edge of elastic 1/4" (6mm) from raw edge. Stitch close to inner edge of elastic in a generous 1/8" (3mm) zigzag stitch. Trim padding and front close to stitching.

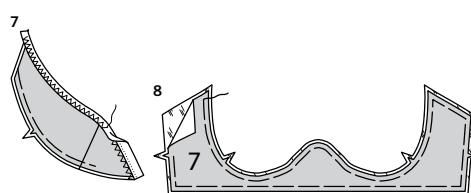


7. Turn fold over elastic to OUTSIDE along fold line. Stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch.


8. Pin front band (7) to front band lining with WRONG sides together. Baste a scant $1/4"$ (6mm) from raw edges.

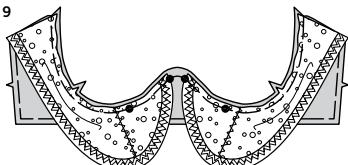


9. With RIGHT sides together and raw edges even, pin lower edge of front to front band, matching small dots and notches, pulling up ease stitches to fit. Baste.

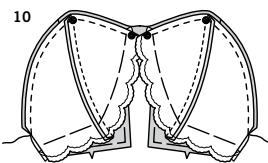


10. With RIGHT sides together and raw edges even, pin lower edge of cup to front band (over front), matching small dots and notches. Stitch with a straight stitch between upper edges and through small dots at center front, back stitching at beginning and end to reinforce the seam.

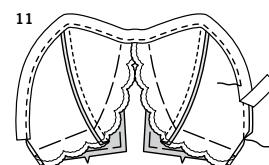

11. Cut a piece of $3/8"$ (1cm) wide underwire bra channeling, the length of the band seam allowance. On INSIDE (cup side), pin channeling (plush side up) to seam allowance, having inner edge of channeling just lapping the seamline $1/16"$ (1.5mm). Stitch close to inner edge of channeling over previous stitching.

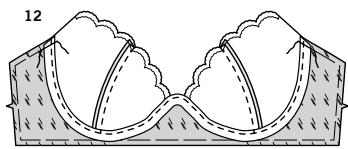


12. Press band and channeling down. Insert monowire into channeling. Baste across ends. Remove hand-basting from galloon lace panels.

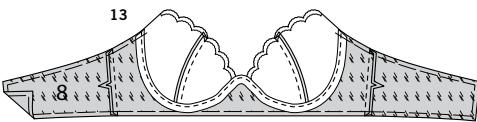


13. Pin back band (8) to corresponding lining section with WRONG sides together. Baste a scant $1/4"$ (6mm) from raw edges. Stitch front band to back band at side edges, using a straight stitch. Press seam toward back.


If you prefer, overlock (serge) seam allowances.

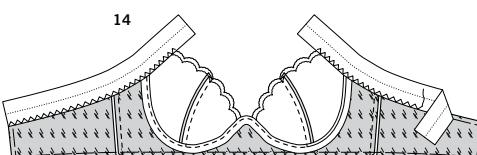


14. For each side, cut a piece of $3/4"$ (2cm) wide fold over elastic the length of the upper edge of back and underarm, plus $1-1/2"$ (3.8cm). On INSIDE, pin WRONG side of fold over elastic to upper edge of back and armhole, having inner edge of elastic $1/4"$ (6mm) from raw edge, and end extend above upper edge of cup. Stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch. Trim back and armhole to stitching.

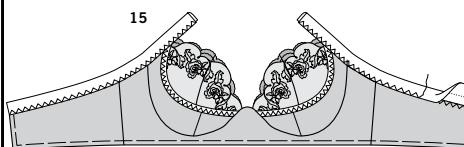

15. Turn fold over elastic to OUTSIDE along fold line. Stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch, continuing to stitch across extension. Cut a piece of $3/4"$ (2cm) wide fold over elastic the length of the lower edge of band, and stitch to lower edge of bra in the same manner.

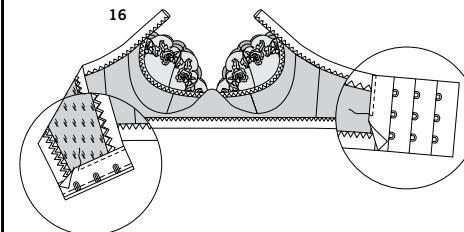


16. Open out the eye end of bra fastener. Slip $1/2"$ (1.3cm) of the LEFT band into the open end of the fastener with the eyes on the OUTSIDE. Stitch close to opening edge of fastener through all thicknesses. Open out the hook end of bra fastener. Slip $1/2"$ (1.3cm) of the RIGHT band into the open end of the fastener with the hooks on the INSIDE. Stitch close to opening edge of fastener through all thicknesses.

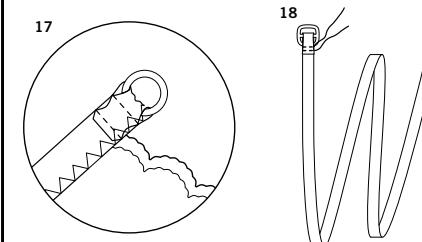


17. Fold under underarm extension of fold over elastic $7/8"$ (2.2cm). Thread end through bra ring to fold. Stitch $1/4"$ (6mm) from fold, using a straight stitch. Stitch again over previous stitching to secure. Stitch end to extension close to raw edge.

18. Cut two pieces of strap elastic $24"$ (61.5cm) long. Fold $5/8"$ (1.5cm) of one end of elastic over center bar of slider. Stitch, using two rows of straight stitches.

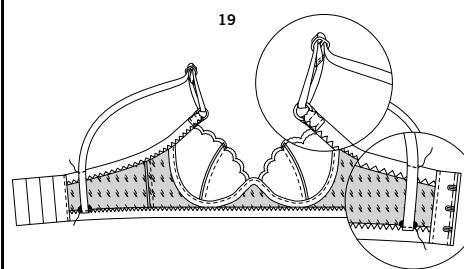

19. Thread end through ring, and weave through outer bars of slider. Pull elastic through slider leaving ample room for future adjustment, having both RIGHT and LEFT straps equal. Try on bra. Make additional adjustments to straps as necessary. On INSIDE, pin end of strap to back centered over large dot. Stitch across end, and across strap just below upper edge of fold over elastic through all thicknesses, using two rows of straight stitching.

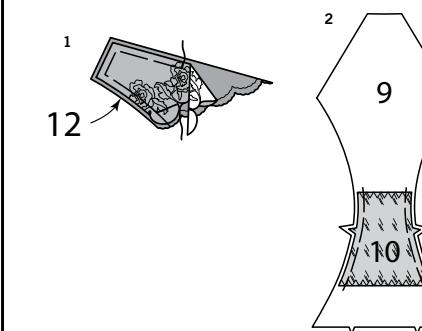


PANTY B, THONG C

NOTE: View B will be shown in illustrations unless noted.

1. You have cut the upper side front (12) in two types of galloon lace. Pin the WRONG side of your chosen OUTSIDE lace to the RIGHT side of your chosen inner lace. Baste a scant $1/4"$ (6mm) from upper, lower, and side edges, as shown. To keep galloon edges together until after the panty is complete, hand-baste across the front edge between the seam allowances, as shown.

2. FOR VIEW B – Finish front and back edges of crotch lining (10) with a straight stitch, zigzag, or overlock stitch. Pin WRONG side of lining to WRONG of front (9), matching notches. Baste a scant $1/4"$ (6mm) from side edges.

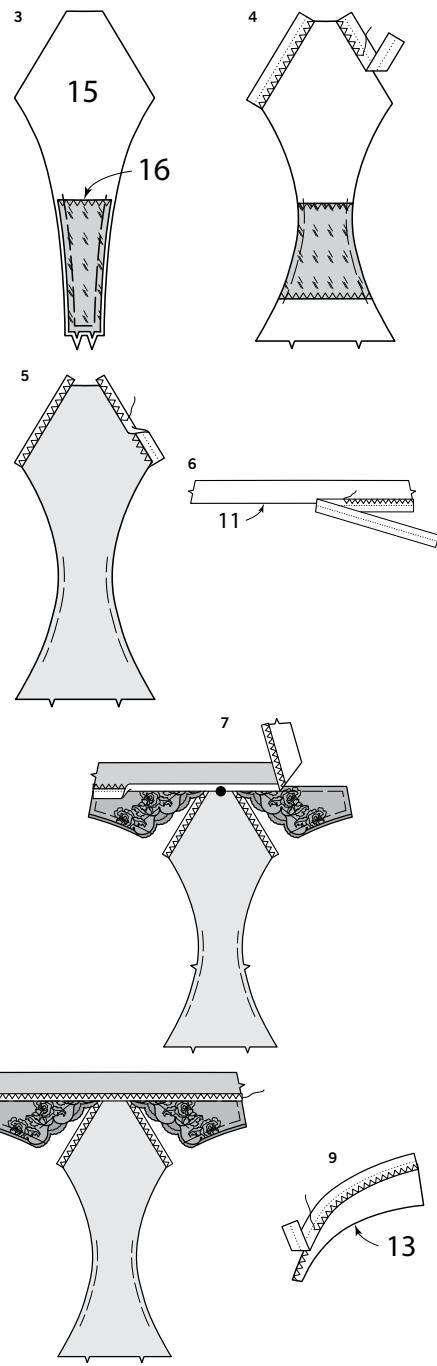

3. FOR VIEW C – Finish front edge of crotch lining (16) with a straight stitch, zigzag, or overlock stitch. Pin **WRONG** side of lining to **WRONG** of front (15), matching notches. Baste a scant $1/4"$ (6mm) from side and lower edges.

CONTINUE AS FOLLOWS FOR BOTH VIEWS

4. For each upper side edge of front, cut a piece of $3/8"$ (1cm) wide fold over elastic. On **INSIDE**, pin **WRONG** side of fold over elastic to upper edge of front having inner edge of elastic $1/4"$ (6mm) from raw edge. Stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch. Trim front close to stitching.


5. Turn fold over elastic to **OUTSIDE** along fold line. Stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch.

6. Cut a piece of $3/8"$ (1cm) wide fold over elastic the length of the lower edge of upper front (11). On **INSIDE**, pin **WRONG** side of fold over elastic to lower edge of upper front having inner edge of elastic $1/4"$ (6mm) from raw edge. Stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch. Trim upper front close to stitching.


7. Turn fold over elastic to **OUTSIDE** along fold line. Lap lower edge of upper front over upper edge of upper side front sections $1/4"$ (6mm) from raw edge; pin. Lap lower edge of upper front over front in the same manner, matching centers; pin.

8. On **OUTSIDE**, stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch, catching in upper edges of upper side front and front.


9. Cut a piece of $3/8"$ (1cm) wide fold over elastic the length of the upper edge of lower side front (13). On **INSIDE**, pin **WRONG** side of fold over elastic to upper edge of lower side front having inner edge of elastic $1/4"$ (6mm) from raw edge. Stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch. Trim lower side front close to stitching.

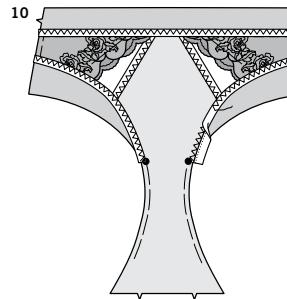


10. Turn fold over elastic to **OUTSIDE** along fold line. Lap upper edge of lower side front over lower edge of upper side front sections $1/4"$ (6mm) from raw edge; pin. Lap upper edge of lower side front over front in the same manner, placing inner edge of lower side front at small dot on front; pin. On **OUTSIDE**, stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch.

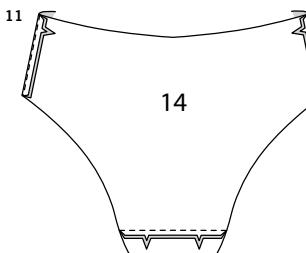


11. FOR VIEW B – Pin front to back (14) at side edges. Stitch, using a straight stitch. Press seam toward back. Pin front to back at lower edges. Stitch, in the same manner. Press seam toward front.

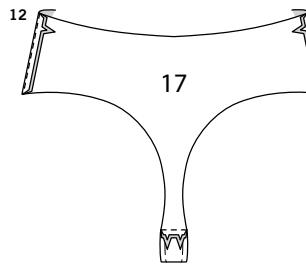

12. FOR VIEW C – Pin front to back (17) at side edges. Stitch, using a straight stitch. Press seam toward back. Pin front to back at lower edges. Stitch, in the same manner, catching in back edge of crotch lining. Press seam toward front.

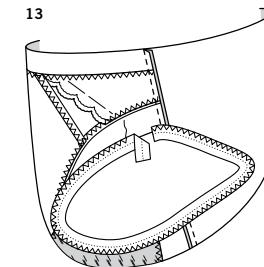

13. For each leg hole, cut a piece of $3/8"$ (1cm) wide fold over elastic the length of the leg edge, plus $1/2"$ (1cm). On **INSIDE**, pin **WRONG** side of fold over elastic to leg edge, having inner edge of elastic $1/4"$ (6mm) from raw edge, lapping $1/2"$ (1cm) at side seam. Stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch. Trim front and back close to stitching.

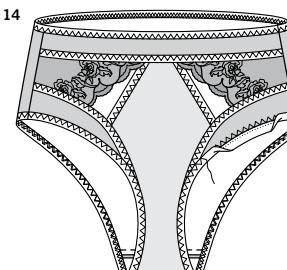

14. Turn fold over elastic to **OUTSIDE** along fold line. Stitch close to inner edge of elastic in a generous $1/8"$ (3mm) zigzag stitch. Apply $3/8"$ (1cm) wide fold over elastic to upper edge of panty in the same manner as leg edge. Remove hand-basting on upper side front.

CONTINUE AS FOLLOWS FOR BOTH VIEWS



Congrats!

You've completed your sewing adventure

SHARE YOUR LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at **simplicity.com**

Have a question or need help with your sewing project call us at
1-888-588-2700

Simplicity
by design group

Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.