

S9861

Simplicity®



Designed and printed in USA.

easy-to-sew

Use the 1 inch (2.54cm) box to ensure you are using rule at 100%

Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.

## PICK-A-KNIT® RULE

FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE  
POUR CE PATRON - LE JERSEY DOIT S'ÉTIRER DANS LA LAGEUR DE 4" (10 cm) DEPUIS ICI  
PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO ANCHO POR 4" (10 cm) DESDE AQUI

TO HERE 35%  
JUSQUE LA 35%  
HASTA ALLA 35%

When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.

Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.

Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

Very Easy

## CHILDREN'S, TEEN'S AND ADULT'S KNIT LOUNGEWEAR

**Suggested Fabrics:** Stretch Knits only such as Cotton Jersey Knit. See Pick-A-Knit® Rule.

**Notions:** B: 1" (2.5cm) elastic: 1 yd. (0.8m) for Children/Teens, 1¼ yds. (1.2m) for Adults.

Sizes	CHILDREN'S/ TEENS'			
	XS	S	M	L
	5-6	7-8	10-12	14-16

**BODY MEASUREMENTS:** Select pattern size based on body measurements

Chest/ Bust	24-25	26-27	28½-30	32-34	Ins.
Waist	21½-22	23-23½	24½-25½	26½-27½	"
Hip	25-26	27-28	30-32	34-36	"
Back-neck to waist	10-10½	11½-12	12¾-13½	14¼-15	"
Top A	60**	¾	¾	1¾	Yds.
Bottoms B	60**	1	1¾	1¾	Yds.

Sizes	TEENS'/ ADULT'S				
	XS	S	M	L	XL
	30-32	34-36	38-40	42-44	46-48
European	40-42	44-46	48-50	52-54	56-58

**BODY MEASUREMENTS:** Select pattern size based on body measurements

Chest/ Bust	30-32	34-36	38-40	42-44	46-48	Ins.
Waist	24-26	28-30	32-34	36-39	42-44	"
Hip	31-33	35-37	39-41	43-45	47-49	"
Back-neck to waist	17¼-17½	17¾-18	18¼-18½	18¾-19	19¼-19½	"
Top A	60**	1¾	1¾	1¾	1¾	Yds.
Bottoms B	60**	1¾	1¾	2	2¾	Yds.

**NOTE:** Please refer to the sewing instructions for FINISHED GARMENT MEASUREMENTS.

\*with nap \*\*without nap

Très Facile

## VÊTEMENTS DE DÉTENTE EN TRICOT POUR ENFANTS, ADOLESCENTS ET ADULTES

**Tissus Conseillés:** Seulement pour tricot extensibles tels que Tricot jersey de coton. Reportez-vous à la règle Pick-A-Knit®.

**Mercerie:** B: élastique de 2.5cm: 0.8m pour enfants/adolescents, 1.2m pour adultes.

Tailles	ENFANTS/ ADOLESCENTS			
	TP/XS	P/S	M	G/L
	5-6	7-8	10-12	14-16

**MESURES DU CORPS:** Choisissez la taille du patron basée sur les mesures du corps

Poitrine	61-64	66-69	71-76	81-86	cm
Taille	52-54	59-60	64-66	67-70	"
Hanches	59-61	69-71	76-79	88-93	"
Dos du cou à la taille	26-27	29-31	32-33	36-41	"
Haut A	150cm*	0.7	0.7	1.0	1.3 m
Parties Inférieures B	150cm*	0.9	1.0	1.1	1.3 m

Tailles	ADOLESCENTS/ ADULTES				
	TP/XS	P/S	M	G/L	TG/XL
	30-32	34-36	38-40	42-44	46-48
Françaises/ Eur	40-42	44-46	48-50	52-54	56-58

**MESURES DU CORPS:** Choisissez la taille du patron basée sur les mesures du corps

Poitrine	76-81	87-92	97-102	107-112	117-122	cm
Taille	61-66	71-76	82-87	92-99	107-112	"
Hanches	79-84	89-94	99-104	109-115	120-125	"
Dos du cou à la taille	44	45-46	47-48	48-49	49-50	"
Haut A	150cm*	1.5	1.5	1.5	1.6	m
Parties Inférieures B	150cm*	1.5	1.5	1.5	1.7	1.9 m


**NOTE:** S'il vous plaît, reportez-vous aux instructions de couture pour les MESURES DU VÊTEMENTS FINI.

\*avec sens \*\*sans sens




# Simplicity®

Thank you for purchasing this Simplicity pattern.  
We made every effort to provide you with a high quality product.

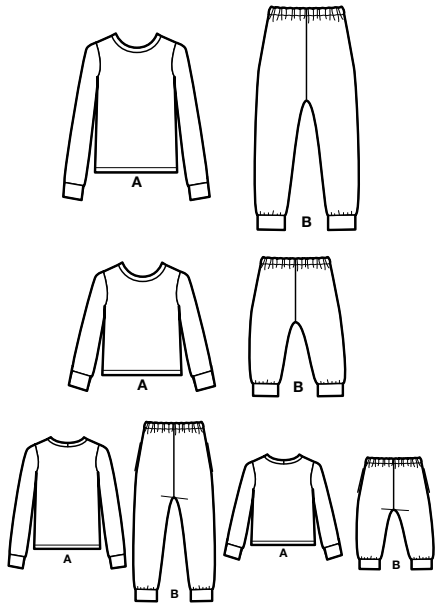


10 PIECES

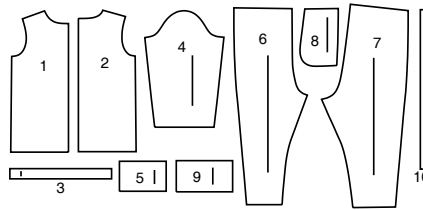

- 1 Front-A
- 2 Back-A
- 3 Neckband-A
- 4 Sleeve-A
- 5 Sleeve Band-A
- 6 Front-B
- 7 Back-B
- 8 Pocket-B
- 9 Leg Band-B
- 10 Guide for Elastic-B

## Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY  
SLIGHTLY ACCORDING TO YOUR PATTERN SIZE


Sizes	CHILDREN'S/ TEENS'				
	XS 5-6	S 7-8	M 10-12	L 14-16	
<b>FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)</b>					
A Chest	26½	28	30½	34	Ins.
A,B Waist	28	29½	32	35½	*
B Hip	31	32½	35	38½	*
<b>Width, lower edge</b>					
Top A	30	31½	34	37½	Ins.
<b>Finished back length from base of neck</b>					
Top A	18½	18½	20	21½	Ins.
<b>Finished side length from waist</b>					
Bottoms B	29½	31½	34½	37½	Ins.

Sizes	TEENS'/ADULTS'				
	XS 30-32	S 34-36	M 38-40	L 42-44	XL 46-48
<b>FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)</b>					
A Chest	37	41	45	49	53
A Waist	37½	41½	45½	49½	53½
B Waist	34½	38½	42½	46½	50½
B Hip	37	41	45	49	53
<b>Width, lower edge</b>					
Top A	37½	41½	45½	49½	53½
<b>Finished back length from base of neck</b>					
Top A	25½	26	26½	27	27½
<b>Finished side length from waist</b>					
Bottoms B	40½	41	41½	42	42½

## CHILDREN'S, TEENS'


### TOP A

USE PIECES 1 2 3 4 5  
60" (150CM)  
WITH NAP  
SIZES XS S M L

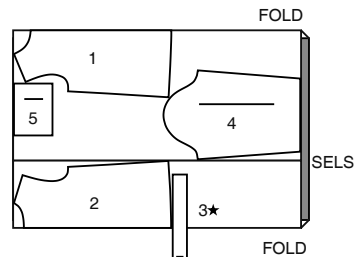


### PANTS B

USE PIECES 6 7 8 9  
60" (150CM)  
WITH NAP  
SIZES XS S M L




## General Directions

### The Pattern



SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

**ADJUST IF NEEDED**  
Make adjustments before placing pattern on fabric.





**TO LENGTHEN:**  
Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

**TO SHORTEN:**  
At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

### Sewing

- SEW garment following **Sewing Directions**.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.



### Cutting/Marking

**BEFORE CUTTING:**  
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.


PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

**AFTER CUTTING:**  
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


### To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.




### SPECIAL CUTTING NOTES


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.



✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).




Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).



## ADULTS'


### TOP A

USE PIECES 1 2 3 4 5  
60" (150CM)  
WITH NAP  
SIZES XS S M L XL

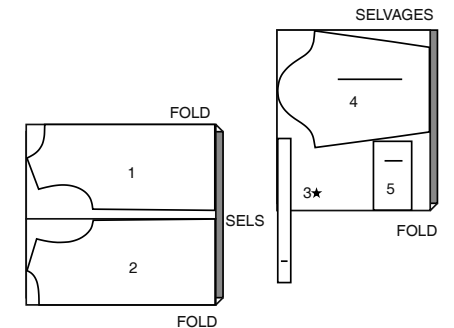

### PANTS B

USE PIECES 6 7 8 9  
60" (150CM)  
WITH NAP  
SIZES XS S M L XL

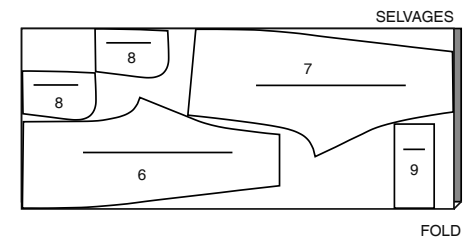

## Sewing Directions

**FABRIC KEY** RIGHT SIDE WRONG SIDE INTERFACING LINING LINING

Read **General Directions** on page 1 before you begin.

### SIMPLY THE BEST SEWING TECHNIQUES...




#### FOR KNITS

- Use a ball point or stretch needle.
- Decrease pressure on presser foot for heavy sweater knits; increase pressure for lingerie knits.

#### SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at [simplicity.com/sewingtutorials](https://www.simplicity.com/sewingtutorials)

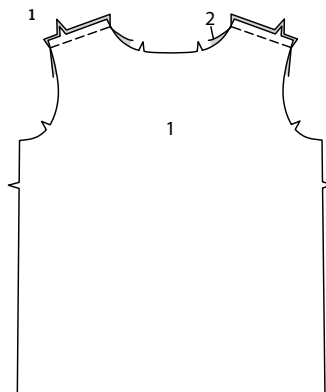

- Stretch knits need seams that are supple enough to “give” with the fabric. You can sew them with straight stitches (stretching the fabric slightly as you sew), narrow zig-zag stitches or one of the stretch stitches built into many conventional machines, or on your serger.

- Some knits require very little or no pressing while sewing. Use the appropriate temperature setting. Press lightly or use steam.
- To prevent shoulder seams from stretching, pin center of hem tape, clear elastic, or twill tape along seam line on front shoulder edges, then stitch the shoulder seams.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

**EDGESTITCH** - see **Machine Stitches: “how to edgestitch”** video.

**REINFORCE**- see **Machine Stitches: “how to reinforce”** video.

**SLEEVE**- see **Armholes/Sleeves: “sewing a set-in sleeve”** video.

**UNDERSTITCH**- see **Machine Stitches: “how to understitch”** video.

**PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.**







**STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.**

## TOP

- 1.** Stitch Front (1) to Back (2) at shoulders.

- 2.** With **RIGHT** sides together, stitch center back seam of Neck Band (3). Fold band in half, lengthwise, with **WRONG** sides together; press. Pin.

- 3.** On **OUTSIDE**, pin neck band to neck edge of top, matching centers, placing small dots at shoulder seams, and having raw edges even.

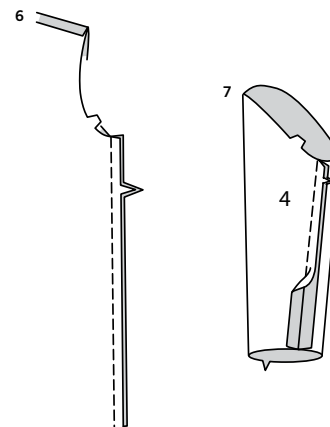

- 4.** Stitch in a 3/8” (1cm) seam, stretching band to fit. Stitch again 1/4” (6mm) from first stitching within seam allowance. Press seam toward top, pressing band out.

- 5. EDGESTITCH** neck edge of top, using a straight or zig-zag stitch.

- 6.** Stitch back to front at side seams.

- 7.** Stitch underarm seam of Sleeve (4).


- 8.** With **RIGHT** sides together, stitch short ends of Sleeve Band (5). Fold band in half, lengthwise, with **WRONG** sides together; press. Pin.

- 9.** On **OUTSIDE**, pin band to lower edge of sleeve, matching seams, and notches. Stitch, stretching band to fit. Stitch again 1/4” (6mm) from first stitching within the seam allowance. Trim close to second stitching. Press seam toward sleeve, pressing band out.


- 10.** Turn sleeve **RIGHT** side out. Hold top **WRONG** side out with armhole toward you. With **RIGHT** sides together, pin **SLEEVE** to armhole edge with center small dot at shoulder seam, matching underarm seams, notches and remaining small dots. Baste. Stitch. Stitch again 1/8” (3mm) from first stitching. Trim seam below notches close to stitching.

- 11.** Press up 1-1/4” (3.2cm) hem on lower edge of top. Stitch **OR** zigzag 1/4” (6mm) from raw edge.


## PANTS B

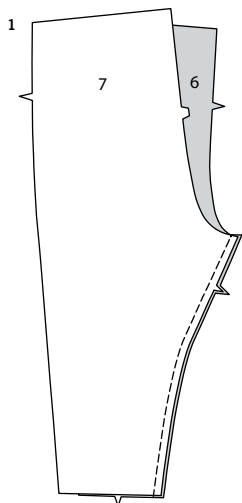


1. Stitch Front (6) to Back (7) at inner leg seams.




2. Pin center seam, matching inner leg seams and notches. Stitch. Stitch again to **REINFORCE** seam.




3. Apply pockets to side edges of front and back as follows:  
With **RIGHT** sides together, pin pocket (8) to pants, matching large dots, having raw edges even.  
Stitch in a 3/8" (1cm) seam.

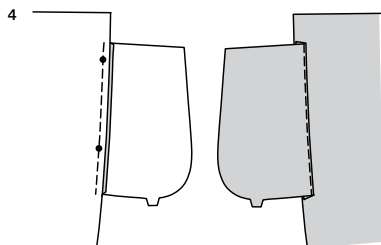


4. Press seam toward pocket, pressing pocket out.  
**UNDERSTITCH** front pocket by stitching through pocket and seam allowance close to seam.

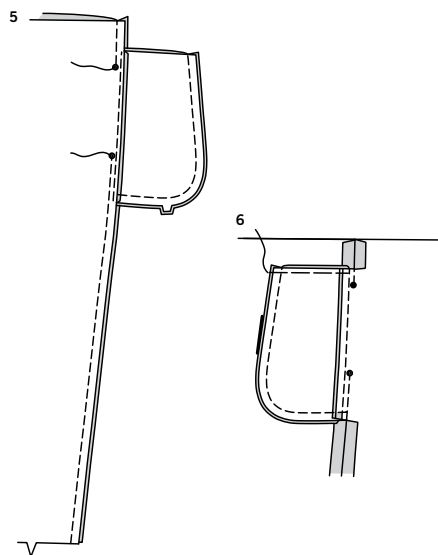


5. Pin front to back at side seams, matching large dots.  
Stitch side seams, leaving an opening between large dots;  
back-stitch at large dot to reinforce seam.  
Stitch pocket edges together from side seam to upper edge.




6. Clip pants back seam allowance at ends of pocket. Press seam open above and below clip. Press pocket toward front.  
Baste 1/4" (6mm) from upper edge of pocket.




7. Press 1-1/2" (3.8cm) on upper edge to **INSIDE**, forming a casing.  
Stitch a scant 3/8" (1cm) from raw edge, leaving an opening to insert elastic.




8. Cut a piece of elastic the measurement of Guide for Elastic (10).  
Insert elastic through casing.  
Overlap ends and stitch securely together.



9. Stitch opening closed.  
Distribute fullness evenly.  
**TIP-** To secure elastic so it won't twist in wearing, stitch through all thicknesses of casing in the groove of each seam.

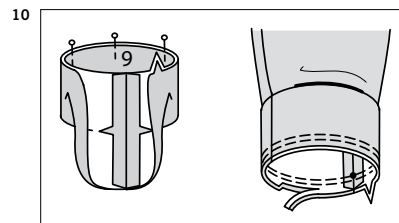

10. With **RIGHT** sides together, stitch notched ends of Leg Band (9) sections. Fold band in half lengthwise, with **WRONG** sides together, having raw edges even. Pin.



11. On **OUTSIDE**, pin leg band to lower edge of pants, matching inner leg seams and placing small dot at side seam.  
Stitch, stretching band to fit.  
Stitch again 1/4" (6mm) from first stitching within seam allowance and trim close to second stitching.  
Press seam toward pants, pressing band out.



# Congrats!

You've completed your sewing adventure

---

## SHARE YOUR LOOK



Post your pattern and tag us  
**@simplicity\_creative\_group** and **#simplicitypatterns**  
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at  
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA [www.thedesigngroup.com](https://www.thedesigngroup.com) • All Rights Reserved. [www.simplicity.com](https://www.simplicity.com) • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.