

S9876

**Simplicity**<sup>®</sup>



Designed and printed in USA.



Shop all the pattern brands you love @

**Simplicity**<sup>®</sup>.com

Average

**22½" (57CM) PLUSH DINOSAURS AND DRAGONS**

**Suggested Fabrics:** A,B,C,D,E,F **Contrasts A,B,C,D,E,F:** Fleece Types/Polar Fleece.  
**Contrasts A,B,C,D,E,F also in:** Lame. **Nails C,E, Nostril C,D,E, Spikes and Nails D, Tongue D:** Felt. **Interfacing A:** Headliner. **Interfacing C,D:** Fleece. **Interfacing E,F:** Craft weight.

**Notions:** A,B,C,D,E,F: Polyester Fiberfill, pair of 15mm safety lock eyes.

**All Views:** 22½" L x 14½" W x 7" H (57cm x 37cm x 18cm)

<p><b>Dinosaur A</b>            60"* - ¾ yd. (150cm* - 0.8m)  <b>Contrast A (Fin):</b>            8" x 10" (21cm x 26cm) fabric remnant  <b>Interfacing A (Fin):</b>            6" x 8" (15cm x 21cm) headliner remnant</p>	<p><b>Dinosaur B</b>            60"* - ¾ yd. (150cm* - 0.8m)  <b>Contrast B (Plates and Spikes):</b>            Two 9" x 12" (23cm x 31cm) felt sheets  <b>Paper-backed Fusible Web B:</b>            7" x 11" (18cm x 28cm) remnant</p>
<p><b>Dragon C</b>            60"* - ¾ yd. (150cm* - 0.8m)  <b>Contrast C (Wings, Crest, Spikes, Wattle)</b>            60"* - ¾ yd. (150cm* - 0.3m)  <b>Nails C:</b>            One 9" x 12" (23cm x 31cm) felt sheet  <b>Nostrils Appliqué C:</b>            3" (8cm) square felt remnant  <b>Interfacing C (Wings):</b>            5" x 13" (13cm x 33cm) fleece remnant  <b>Paper-backed Fusible Web C:</b>            17" - ¾ yd. (43cm - 0.8m)</p>	<p><b>Dragon D</b>            60"* - ¾ yd. (150cm* - 0.8m)  <b>Contrast D (Wings, Horns, Ears):</b>            60"* - ¾ yd. (150cm* - 0.2m)  <b>Spikes and Nails D:</b>            Two 9" x 12" (23cm x 31cm) felt sheets  <b>Tongue D:</b>            3" x 6" (8cm x 15cm) felt remnant  <b>Nostrils Appliqué D:</b>            3" (8cm) square felt remnant  <b>Interfacing D (Wings):</b>            5" x 13" (13cm x 33cm) fleece remnant  <b>Paper-backed Fusible Web D:</b>            12" (30cm) square remnant</p>
<p><b>Dragon E</b>            60"* - ¾ yd. (150cm* - 0.8m)  <b>Contrast E (Wings, Horns, Nose, Crest, Spears, Wattle):</b>            60"* - ¼ yd. (150cm* - 0.2m)  <b>Nails E:</b>            One 9" x 12" (23cm x 31cm) felt sheet  <b>Nostrils Appliqué E:</b>            3" (8cm) square felt remnant  <b>Interfacing E (Wings):</b>            5" x 12" (13cm x 31cm) remnant  <b>Paper-backed Fusible Web E:</b>            11" (28cm) square remnant</p>	<p><b>Dinosaur F</b>            60"* - ¾ yd. (150cm* - 0.8m)  <b>Contrast F (Crest, Nose, Horns):</b>            60"* - ¼ yd. (150cm* - 0.2m)  <b>Interfacing F:</b>            5" x 8" (13cm x 21cm) remnant</p>

\*with nap \*\*without nap



A



B



C



D





E




F

# Simplicity® S9876

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

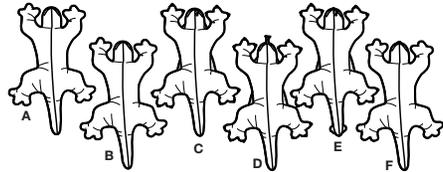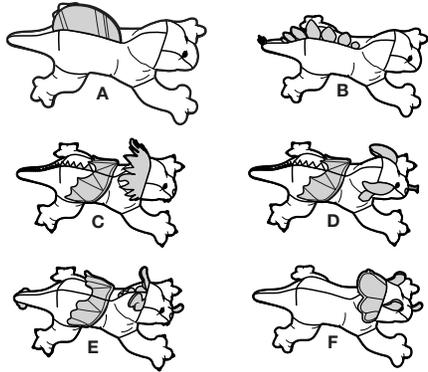


20 PIECES

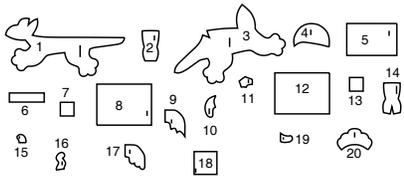

- |                                |                                    |
|--------------------------------|------------------------------------|
| 1 FRONT - A,B,C,D,E,F          | 11 EAR - D                         |
| 2 HEAD FRONT - A,B,C,D         | 12 SPIKES AND NAILS - D            |
| 3 BACK - A,B,C,D,E,F           | 13 TONGUE - D                      |
| 4 FIN - A                      | 14 HEAD FRONT - E,F                |
| 5 PLATES AND SPIKES - B        | 15 NOSE - E,F                      |
| 6 NAILS - C,E                  | 16 HORN - E                        |
| 7 NOSTRIL APPLIQUE - C,D,E     | 17 WING - E                        |
| 8 CREST, SPIKES AND WATTLE - C | 18 CREST AND SPEARS AND WATTLE - E |
| 9 WINGS - C,D                  | 19 HORN - F                        |
| 10 HORN - D                    | 20 CREST - F                       |

## Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

### General Directions For Cutting

**PRE-SHRINK** and iron all fabric.

**FOR DOUBLE THICKNESS** -Fold fabric with **RIGHT** sides together. Pin pattern to **WRONG** side of fabric.

**FOR SINGLE THICKNESS** -Pin pattern to **RIGHT** side of fabric.


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends. Open out fabric to single thickness. Cut extending piece on **RIGHT** side of fabric in position shown.

✱ Mark small arrows along both selvages in dictating direction of nap or design. Fold fabric crosswise with **RIGHT** sides together, and cut along fold. Turn one fabric layer around so arrows on both layers go in the same direction. Place **RIGHT** sides together.

### DINOSAUR A,B and DRAGON C,D

USE PIECES 1 2 3

60" (150CM) WITH NAP



### CONTRAST A (FIN)

CUT TWO OF PIECE 4 FROM FABRIC REMNANT

### INTERFACING A (FIN)

CUT ONE OF PIECE 4 FROM HEADLINER REMNANT

### CONTRAST B (PLATES AND SPIKES)

CUT TWO OF PIECE 5 FROM TWO FELT SHEETS

### PAPER BACK FUSIBLE WEB B

CUT ONE OF PIECE 5 FROM REMNANT


### NOSTRIL APPLIQUE C,D,E

CUT ONE OF PIECE 7 FROM FELT REMNANT

### CONTRAST C (WINGS, CREST, SPEARS, WATTLE)

USE PIECES 8 9

60" (150CM) WITH NAP




### NAILS C

CUT TWO OF PIECE 6 FROM ONE FELT SHEET

### PAPER BACK FUSIBLE WEB C

USE PIECES 6 7 8

17" (43CM)



### INTERFACING C,D (WINGS)


**VIEW C** - CUT TWO OF PIECE 9 FROM FLEECE REMNANT.

**VIEW D** - CUT TWO OF PIECES 9, 10, 11 FROM FLEECE REMNANT.

### CONTRAST D (WINGS, HORNS, EARS)

USE PIECES 9 10 11

60" (150CM) WITH NAP



### SPIKES AND NAILS D

CUT TWO OF PIECE 12 FROM TWO FELT SHEETS

### TONGUE D

CUT TWO OF PIECE 13 FROM FELT REMNANT


### PAPER BACK FUSIBLE WEB D

CUT ONE EACH PIECES 7 12 13 FROM REMNANT

### DRAGON E AND DINOSAUR F

USE PIECES 1 3 14


60" (150CM) WITH NAP



### CONTRAST E (WINGS, HORNS, NOSE, CREST, SPEARS, WATTLE)

USE PIECES 15 16 17 18

60" (150CM) WITH NAP



### NAILS E

CUT TWO OF PIECE 6 FROM ONE FELT SHEET

### INTERFACING E (WINGS)

CUT TWO OF PIECE PIECE 17 FROM CRAFT WEIGHT INTERFACING REMNANT


### PAPER BACK FUSIBLE WEB E

CUT ONE EACH OF PIECES 6 7 18 FROM REMNANT

### CONTRAST F (CREST, NOSE, HORNS)

USE PIECES 15 19 20

60" (150CM) WITH NAP



### INTERFACING F (CREST)

CUT ONE OF PIECE 20 FROM CRAFT WEIGHT INTERFACING REMNANT


## SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at [simplicity.com/sewingtutorials](http://simplicity.com/sewingtutorials)

## SIMPLY THE BEST TECHNIQUES FOR SEWING FLEECE

- Fleece fabric is strong, hard to puncture or tear and doesn't ravel. Since cut edges of fleece fabrics do not ravel, inner edges of seams and hems can be left raw.
- When pinning pieces together, use long pins...the kind with bead heads are best because short pins tend to get lost in the fleece.
- Use a ball point needle.
- When stitching, try using a narrow zig-zag stitches, adjusting the width and length for the type of fleece you are using. Always test first on some scraps and keep for reference.

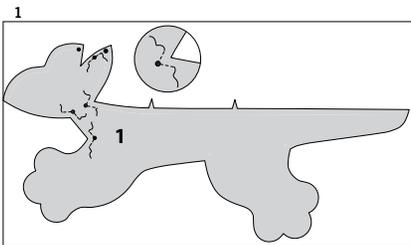

## Sewing Directions

FABRIC KEY RIGHT SIDE WRONG SIDE INTERFACING LINING LINING

Read **General Directions** on page 1 before you begin.

Sewing procedures **ITALICIZED** in Sewing Directions are defined below.

**INTERFACING** – Apply fusible interfacing (craft weight or fleece) to **WRONG** side of section. Fuse in place, following manufacturer's directions.

**STUFF** - Pull fiberfill apart and fluff it before you use it. Break apart lumps and thick spots. Use pieces about the size of a tennis ball for large areas. For small area, use pieces the size of a ping pong ball or smaller. Pack into place using the end of a long handled wooden spoon or chopstick. Pack firmly in place each time stuffing is added, unless otherwise directed in Sewing Instructions. Use both hands to mold and shape, being careful not to over stuff or make lopsided. When stuffing sections that will be inserted into seams, place less stuffing at opening seam line so that you will be able to stitch through it.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

**DART**- see **Darts: "sewing flat dart"** video.

**DOUBLE-POINTED DARTS**-See **"sewing double pointed dart"** video

**REINFORCE**- see **Machine Stitches: "how to reinforce"** video.

**SLIPSTITCH**-see **"how to slipstitch"** video.

**TOPSTITCH**-see **Machine Stitches: "how to topstitch"** video.

**TRIM**- see **"how to trim, clip, and layer seams"** video.

## GENERAL DIRECTIONS FOR SANDWICHING PAPER- BACKED FUSIBLE WEB

- A.** Cut tissue block along outer solid line. Pin and fuse paper backed fusible web between **WRONG** sides of fabric sections, following manufacturer's directions. Pin pattern to **RIGHT** side of prepared fabric. Cut out sections. Transfer markings to **RIGHT** side of applique using a washable fabric marking pen or pencil.


- Sew slowly and carefully the first time you stitch a seam as stitches are hard to remove.
- When sewing around shaped areas sew slowly being careful not to stretch the fleece as you feed fabric through your machine.
- Finger press or steam press on a low temperature setting using a press cloth.

**PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.**


**STITCH IN 3/8" (1CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.**

## DINOSAUR OR DRAGON A, B, C, D, E, F


- 1.** Using fine stitches, **REINFORCE** front (1) sections along seamline on each side of neck for about 1" (2.5cm) on each side of each small dot, as shown, stitching through small dot. **REINFORCE** outer small dot on extended dart edge and on inner corner of arm in same manner.

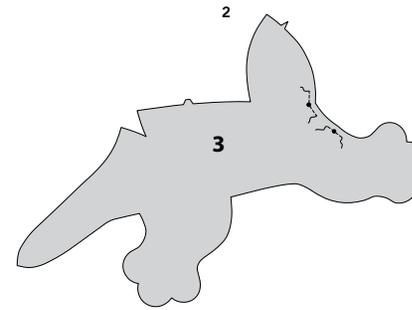

- 2. REINFORCE** back (3) at small dot on inner edge of arm and at small dot on outer neck, as shown.

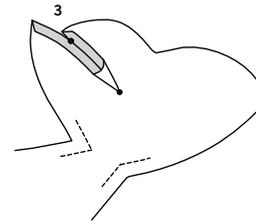


- 3.** To make **DART** seam on head of front, bring broken lines carefully together matching small dots and having raw edges even; stitch dart seam from outer small dot to point, back-stitching at outer small dot to reinforce seam. Lightly press dart seam open as far as possible.

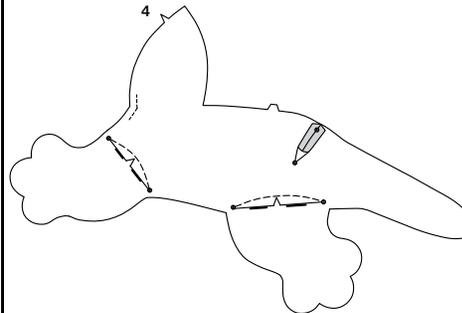


- 4. MAKE DART** seam in back same as for dart seam in front. **TO MAKE DOUBLE-POINTED DARTS**, fold fabric through center of dart, bringing broken lines and small dots together; pin. Stitch middle to one point. Then, overlapping several stitches, work from middle to opposite point. Finger or lightly press dart toward leg, clipping center of dart so that it lays flat.


## FIN A




- 5.** Pin headliner to **WRONG** side of one fin (4) section. Baste a scant 3/8" (1cm) from raw edge. Trim close to basting.




- 6.** Pin fin sections together along outer edges, having raw edges even. Stitch, leaving double notched edges open. **TRIM** seam; clip curves.



- 7.** Turn fin; lightly press.  
Stitch 3/8" (1cm) from double notched edge.  
Stitch along stitching lines.

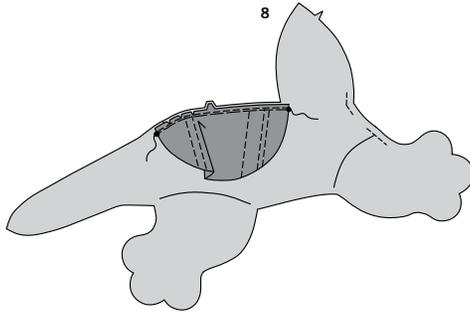


- 8.** On **OUTSIDE**, pin fin to one back section, matching double notches, small and large dot, clipping raw edges to stitching along curves where necessary. Baste.

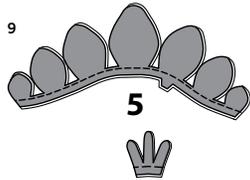


- 9.** Prepare plates and spikes (5). See **GENERAL DIRECTIONS FOR SANDWICHING PAPER-BACKED FUSIBLE WEB**.  
Stitch each section 3/8" (1cm) from double notched edge.

#### PLATES AND SPIKES B

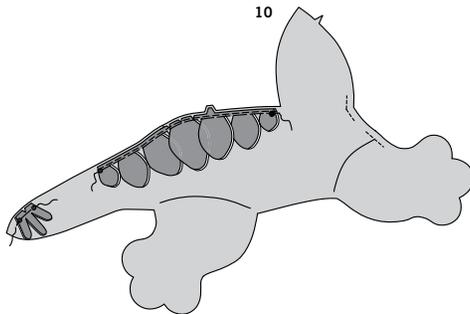


- 10.** On **OUTSIDE**, pin spikes and plates to one back section, matching notches, small and large dots, clipping raw edges to stitching along curves where necessary. Baste.

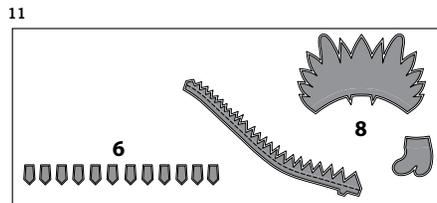


#### NAILS, SPIKES, AND WINGS C, D


- 11.** FOR **VIEW C- PREPARE** nails (6) and crest, spikes, and wattle (8). See **GENERAL DIRECTIONS FOR SANDWICHING PAPER-BACKED FUSIBLE WEB**.  
Stitch spikes 3/8" (1cm) from notched edges.  
Set aside crest and wattle for later.

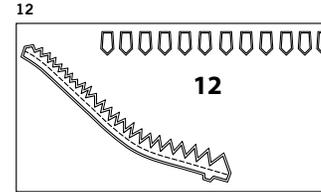


- 12.** FOR **VIEW D- PREPARE** spikes and nails (12). See **GENERAL DIRECTIONS FOR SANDWICHING PAPER-BACKED FUSIBLE WEB**.  
Stitch spikes 3/8" (1cm) from double notched edges.

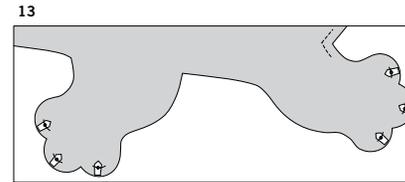


- 13.** FOR **VIEWS C, D-** On outside, baste nails to front arms and legs, matching small dots and having raw edges even.

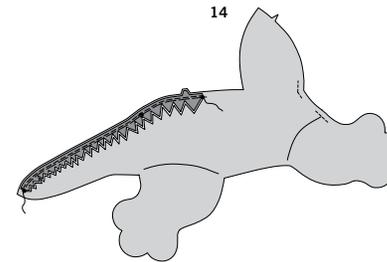


- 14.** On **OUTSIDE**, pin spikes to one back section, placing ends at small dots, matching double notches and inner small dots, clipping seam allowance to stitching where necessary. Baste.




- 15.** Apply fusible fleece **INTERFACING** to wings (9) sections.  
Pin non-interfaced wing to interfaced wing along outer edges, having raw edges even.  
Stitch in a 1/4" (6mm) seam, pivoting with needle in fabric at corners, leaving short straight edges open.  
**REINFORCE** corners and curves.  
**TRIM** corners; clip curves.



- 16.** Turn wing **RIGHT** side out; lightly press.  
Baste raw edges together.  
Stitch along curved stitching lines. Stitch along straight stitching lines as far as curved line.



- 17.** On **OUTSIDE**, baste one wing to each back section, matching small and large dots.





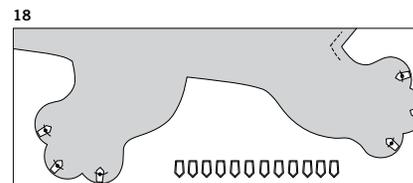


#### BODY E

- 18.** Prepare nails (6). See **GENERAL DIRECTIONS FOR SANDWICHING PAPER-BACKED FUSIBLE WEB**.  
On outside, baste nails to front arms and legs, matching small dots.

S9876

4 of 6

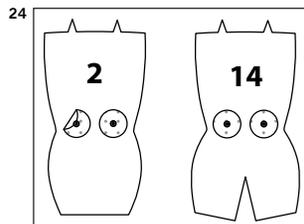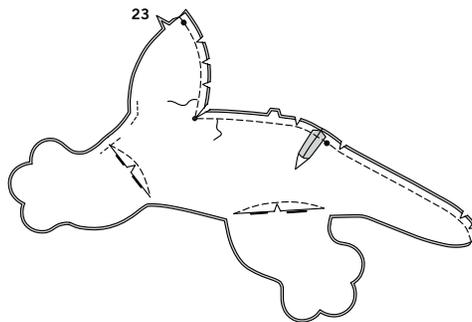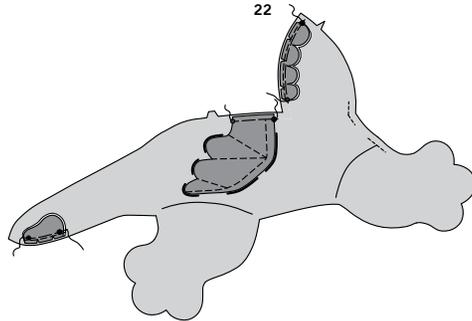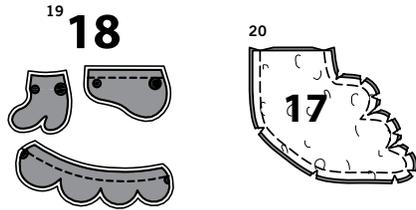

**19.** Prepare crest and spears and wattle (18). See **GENERAL DIRECTIONS FOR SANDWICHING PAPER-BACKED FUSIBLE WEB.**

Stitch 3/8" (1cm) from straight edge on wattle and smooth edge on crest. Set aside crest later.

**20.** Apply craft weight **INTERFACING** to wings (17) sections.

Pin non-interfaced wing to interfaced wing along outer edges, having raw edges even.

Stitch in a 1/4" (6mm) seam, pivoting with needle in fabric at inner corners, leaving short straight edges open.

**REINFORCE** inner corners.

Clip curves and to stitching at inner corners, being careful not to clip through stitching.

**21.** Turn wing **RIGHT** side out; lightly press.

Baste raw edges together.

Stitch along curved broken lines and along stitching lines as far as curved line.

**22.** On **OUTSIDE**, baste one wing to each back section, matching small and large dots.

Baste crest to back of head on one back section, matching small and large dots, clipping crest to stitching along curves to fit.

Baste spear to same back section, matching small and large dots on end of tail.

#### CONTINUE AS FOLLOWS FOR ALL VIEWS










**23.** Pin back sections together at center back, matching double notches, dart seam, small and large dots. Stitch from end of tail to end of back head, as shown, pivoting with needle in fabric at small dot on inner corner.

**REINFORCE** seam at inner corner, pivoting at small dot.

Clip seam allowance to stitching at inner corner, being careful not to clip through stitching. Clip curves.

Lightly press seam open.

**24.** To support head front (2 or 14) for safety eyes, cut two 1" (2.5cm) circles from a remnant of fusible **INTERFACING**. Fuse to **WRONG** side of head underneath small dots for eyes.

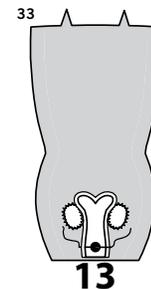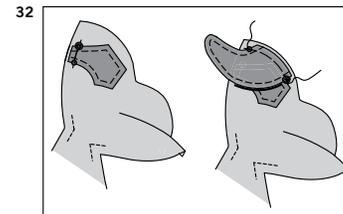

#### HEAD A, B, C, D

**25.** **NOSTRILS C, D-** Apply paper backed fusible web to **WRONG** side of applique fabric, following manufacturer's directions. Cut nostril applique (7) tissue block along outer solid line. Pin pattern to **RIGHT** side of prepared fabric. Cut out each applique.

**26.** Pin nostrils to head front, having outer edges along broken lines. Fuse in place, following manufacturer's directions. Zigzag along raw edges using a narrow stitch.

**27.** **WATTLE C** - On **OUTSIDE**, baste wattle to chin area of one front section, matching small and large dots, having raw edges even.

**28.** **EARS, HORNS, AND TONGUE D-** Apply **INTERFACING** to two mirror ear (11) sections

Pin non-interfaced ear to interfaced ear along outer edges, having raw edges even.

Stitch in a 1/4" (6mm) seam pivoting with needle in fabric at corners, leaving short straight edges open.

**REINFORCE** curves; clip curves where necessary.

**29.** Turn ear; finger press.

Baste raw edges together.

**TOPSTITCH** finished edge, pivoting at corners.

**30.** Apply **INTERFACING** to two mirror horn (10) sections.

Stitch non-interfaced horn to interfaced horn together along outer edges.

Stitch in a 1/4" (6mm) seam, leaving short inner curved edges open.

**REINFORCE** curves; clip.





**31.** Turn horn; lightly press.

**STUFF.**

Baste raw edges together 3/8" (1cm) from raw edge.

**32.** On **OUTSIDE**, baste each ear (interfaced side) to head area of front, matching small and large dots. Baste horn (interfaced side) to edge opposite ear, matching small and large dots.

**33.** **PREPARE** tongue (13), sandwich Baste tongue to chin edge of head front.

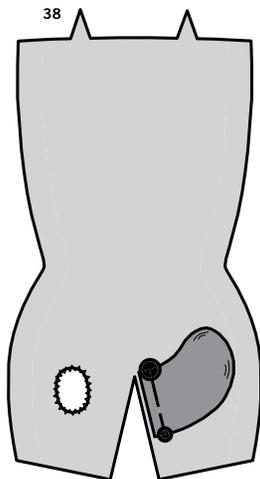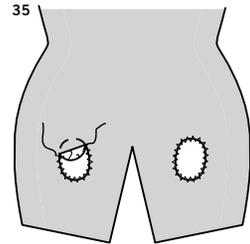

## HEAD E, F

**34. VIEW E-** Apply paper backed fusible web to WRONG side of applique fabric, following manufacturer's directions. Cut nostril applique (7) tissue block along outer solid line. Pin pattern to RIGHT side of prepared fabric. Cut out each applique.




**35.** Pin nostrils to head front, having outer edges along broken lines. Fuse in place, following manufacturer's directions. Zigzag along raw edges using a narrow stitch.

## VIEW E,F

**36.** Pin nose sections together along outer edges, having raw edges even. Stitch in a 1/4" (6mm) seam, leaving short straight edges open. **REINFORCE** curves; clip curves.

**37.** Turn nose; finger press. Lightly **STUFF**. Baste raw edges together 3/8" (1cm) from raw edge.

**38.** On OUTSIDE, baste nose to one edge of dart, matching small and large dots.

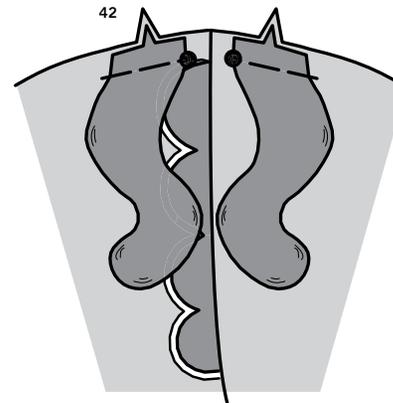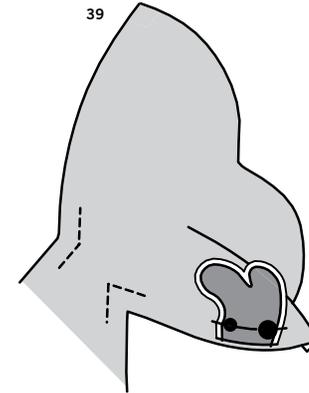

**39. WATTLE AND HORN E-** On OUTSIDE, baste wattle to front chin, matching small and large dots, as shown.



**40.** Stitch two horn (16) sections together along curved edges in a 1/4" (6mm) seam, leaving notched edges open. **REINFORCE** and clip curves.

**41.** Turn horn; finger or lightly press. **LIGHTLY** stuff. Stitch 3/8" (1cm) from raw edges.

**42.** On OUTSIDE, baste horns to upper edge of head front, matching notches, and small dots.


**43. HORN F -** Pin two horn (19) sections together along outer edges, having raw edges even. Stitch in a 1/4" (6mm) seam, leaving short straight edges open. **REINFORCE** and clip curves where necessary.

**44.** Turn horn; finger or lightly press. Lightly **STUFF**. Stitch 3/8" (1cm) from raw edges.

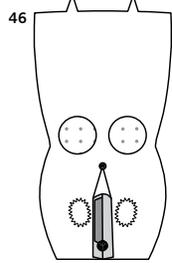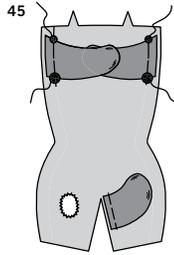


**45.** On **OUTSIDE**, baste horn to side edges of head front, matching small and large dots, being careful to clear the seam allowance on upper edge.

**46.** Make **DART** seam. Finger press seam open as far as possible.

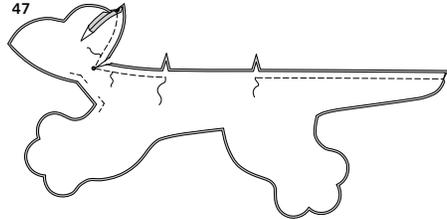


#### CONTINUE AS FOLLOWS FOR ALL VIEWS


**47.** With **RIGHT** sides together and raw edges even, pin center front seam of front sections, matching small dots at neck. Stitch, leaving seam open between notches and pivoting with needle in fabric at small dot on inner corner.  
**REINFORCE** seam on inner corner of neck; clip to stitching, being careful not to clip through stitching.

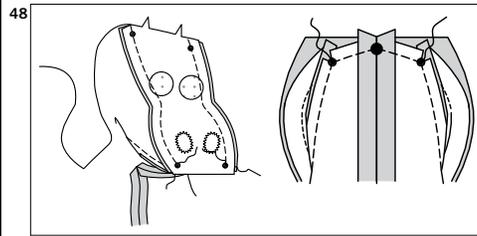


**48.** Pin side edges of head front to front area of head, matching small dots. Stitch from outer edge at top of head to small dot at chin, being careful not to catch in dart seam allowance. Pin front chin to lower edge of head front, matching small and large dots, clipping seam allowance on inner edge of dart seam. Stitch between small dots, keeping dart seam allowances free.

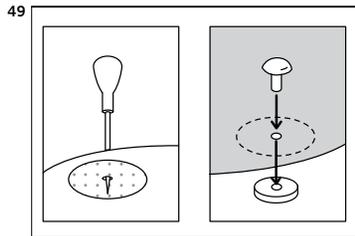


**49.** To attach each eye, using a sharp pointed object or an awl, poke a hole at each small dot. Insert the eye through the opening from **OUTSIDE** and on **INSIDE** secure in place with washer making sure it is on securely.




**50.** **CREST C** - Stitch crest a 3/8" (1cm) from notched edges.

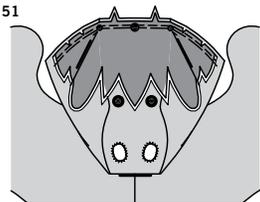


**51.** On **OUTSIDE**, pin crest to front head, matching notches, small and large dots, clipping seam allowance to stitching where necessary. Make sure to clear seam allowance on side edges. Baste.




**52.** **CREST F** - Apply craft weight **INTERFACING** to crest (20). Pin non-interfaced crest to interfaced crest along outer edges, having raw edges even. Stitch in a 1/4" (6mm) seam, leaving notched edges open. **REINFORCE** inner corners. Clip curves and to stitching at inner corners, being careful not to clip through stitching.



**53.** Turn crest; lightly press. Stitch 3/8" (1cm) from raw edges. Stitch along stitching lines.




**54.** On **OUTSIDE**, pin crest to front head, matching notches, small and large dots, clipping seam allowance to stitching where necessary. Make sure to clear seam allowance on side edges. Baste.

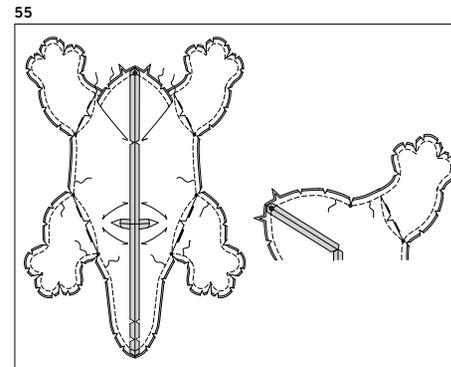

#### CONTINUE AS FOLLOWS FOR ALL VIEWS

**55.** With **RIGHT** sides together and raw edges even, pin front to back along outer edges, matching small and large dots, clipping seam allowance at underarms to fit. Stitch, pivoting at small dots on inner corners. **REINFORCE** seams on inner of arms and legs and wherever else necessary. Clip curves and to reinforcement stitching at inner corners, being careful not to clip through stitching. **TRIM** seam.

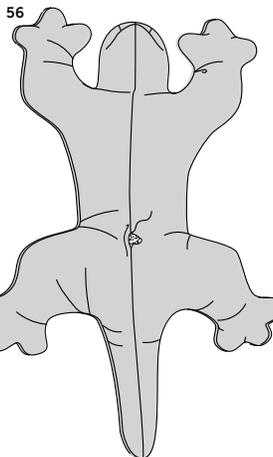

**56.** Turn dinosaur/dragon **RIGHT** side out. Finger or lightly press seams, being careful not to flatten outer edges. Firmly **STUFF** dinosaur/dragon. **SLIPSTITCH** opening closed.



# Congrats!

You've completed your sewing adventure

---

**SHARE  
YOUR** LOOK



Post your pattern and tag us  
**@simplicity\_creative\_group** and **#simplicitypatterns**  
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at  
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA [www.thedesigngroup.com](http://www.thedesigngroup.com) • All Rights Reserved. [www.simplicity.com](http://www.simplicity.com) • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.