

S9890

**Simplicity**



A



B



C



C



Designed and printed in USA.

Average

**WOMEN'S TOPS**

**Suggested Fabrics:** Chambray, Linens, Rayons, Silky Types, Soft Cottons, Tencel.

**Interfacing:** Lightweight Fusible.

**Notions:** A,B: Three ½" (1.3cm) buttons. C: Nine ½" (1.3cm) buttons.

Sizes	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
European	46	48	50	52	54	56	58	60	62	64

**BODY MEASUREMENTS:** Select pattern size based on body measurements

<b>Bust</b>	42	44	46	48	50	52	54	56	58	60	Ins.
<b>Waist</b>	35	37	39	41½	44	46½	49	51½	53	54½	"
<b>Hip-9" below waist</b>	44	46	48	50	52	54	56	58	60	62	"
<b>Back-neck to waist</b>	17¼	17%	17½	17%	17¾	17%	18	18%	18¼	18%	"

**Interfacing A,B,C - 20" - 1½ yd.**

Top	A	B	C	20"	22"	24"	26"	28"	30"	32"	34"	36"	38"	Yds.
<b>Top A</b>	45**	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%	"
<b>Top B</b>	45**	3%	3%	3%	3%	3%	3%	3%	3%	3%	3%	3%	3%	"
<b>Top C</b>	45**	3%	3%	3%	3%	3%	3%	3%	3%	3%	3%	4	4	"
	60**	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%	"

**FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)**

<b>A,B,C Bust</b>	45½	47½	49½	51½	53½	55½	57½	59½	61½	63½	Ins.
<b>A,B,C Waist</b>	46	48	50	52	54	56	58	60	62	64	"
<b>B,C Hip</b>	55	57	59	61	63	65	67	69	71	73	"
<b>Finished back length from base of neck</b>											
<b>Top A</b>	25¼	25½	25¾	26	26¼	26½	26¾	27	27¼	27½	Ins.
<b>Top B,C</b>	30%	30%	30%	31	31%	31%	31¾	32	32¼	32½	"

\*with nap \*\*without nap

Moins Facile

**HAUTS POUR FEMMES**

**Tissu Conseillé:** Chambray, Toiles de lin, Rayonnes, Sortes de soie, Coton souple, Tissu tencel. **Entoilage :** thermocollant léger.

**Mercerie:** A, B : 3 boutons de 1.3cm. C : 9 boutons de 1.3cm.

Tailles	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
Françaises	48	50	52	54	56	58	60	62	64	66
Europèen	46	48	50	52	54	56	58	60	62	64

**MESURES DU CORPS:** Choisissez la taille du patron basée sur les mesures du corps

<b>Poitrine</b>	107	112	117	122	127	132	137	142	147	152	cm
<b>Taille</b>	89	94	99	105	112	118	124	130	134	138	"
<b>Hanches (23cm au-dessous de la taille)</b>											
	112	117	122	127	132	137	142	147	152	157	cm
<b>Dos du cou à la taille</b>	44	44	44.5	45	45	45.5	46	46	46.5	47	"

**Entoilage A,B,C - 51cm - 1.0m**

Haut	A	B	C	115cm*	120cm*	125cm*	130cm*	135cm*	140cm*	145cm*	150cm*	155cm*	160cm*	165cm*	170cm*	175cm*	180cm*	185cm*	190cm*	195cm*	200cm*
<b>Haut A</b>	115cm*	2.2	2.3	2.3	2.3	2.4	2.4	2.7	2.9	2.9	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	150cm*	1.7	1.7	1.8	1.8	1.9	1.7	1.9	1.9	1.9	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	
<b>Haut B</b>	115cm*	3.0	3.0	3.0	3.0	3.1	3.1	3.2	3.2	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	
	150cm*	2.2	2.2	2.2	2.3	2.3	2.3	2.3	2.4	2.4	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	
<b>Haut C</b>	115cm*	3.1	3.1	3.1	3.2	3.2	3.2	3.4	3.4	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	
	150cm*	2.3	2.4	2.4	2.4	2.4	2.5	2.5	2.5	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	


**MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)**

<b>A,B,C Poitrine</b>	116	121	126	131	136	141	146	151	156	161	cm
<b>A,B,C Taille</b>	117	122	127	132	137	142	147	152	157	163	"
<b>B,C Hanches</b>	140	145	150	155	160	165	170	175	180	185	"
<b>Longueur finie – dos, votre nuque à l'ourlet</b>											
<b>Haut A</b>	64	65	65	66	67	67	68	69	69	70	cm
<b>Haut B,C</b>	77	77	78	79	79	80	81	81	82	83	"

\*avec sens \*\*sans sens



A




B


C

# Simplicity®

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

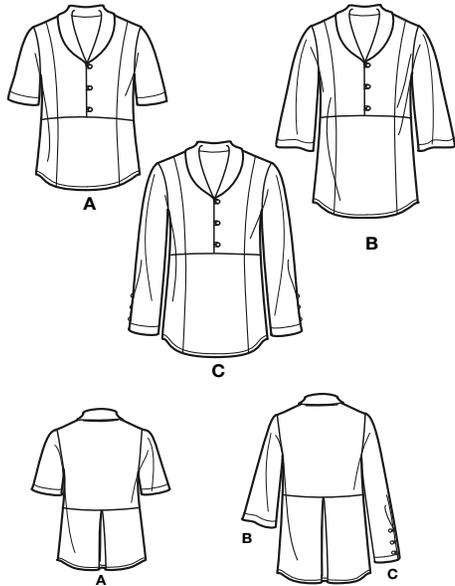

12 PIECES

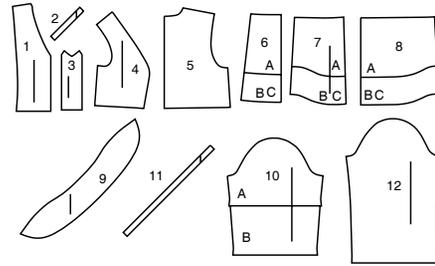

- 1 Upper Front-A,B,C
- 2 Loops-A,B
- 3 Underlap-A,B,C
- 4 Upper Side Front-A,B,C
- 5 Upper Back-A,B,C
- 6 Lower Front-A,B,C
- 7 Lower Side Front-A,B,C
- 8 Lower Back-A,B,C
- 9 Collar-A,B,C
- 10 Sleeve-A,B
- 11 Loops-C
- 12 Sleeve-C

## General Directions

### The Pattern

- SYMBOLS**
- GRAIN LINE Place on straight grain of fabric parallel to selvage
  - PLACE SOLID LINE on fold of fabric.
  - CENTER FRONT OR BACK of garment.
  - NOTCHES
  - DOTS
  - CUTTING LINE
  - LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

**ADJUST IF NEEDED**  
Make adjustments before placing pattern on fabric.

**TO LENGTHEN:**  
Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

**TO SHORTEN:**  
At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

### Cutting/Marking

**BEFORE CUTTING:**  
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.


CIRCLE your cutting layout.  
PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

**AFTER CUTTING:**  
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


#### To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.



### Sewing

- SEW garment following Sewing Directions.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.

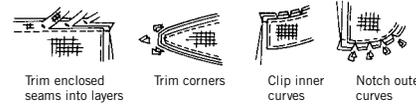


### SPECIAL CUTTING NOTES

★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.




✳ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).




## Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

### INTERFACING A,B,C



USE PIECES 9  
20" (51CM)  
ALL SIZES

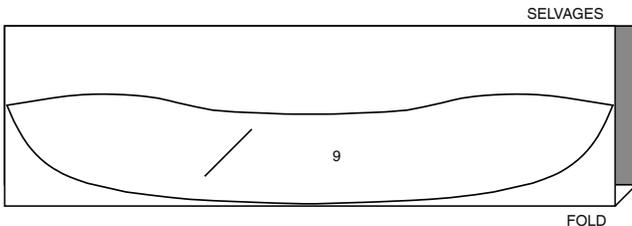



### TOP A

PIECES 1 2 3 4 5 6 7 8 9 10


45" (115CM)  
WITH NAP  
SIZES 20W-22W-24W-26W-28W-30W

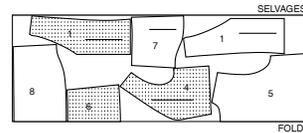

45" (115CM)  
WITH NAP  
SIZES 32W-34W-36W-38W

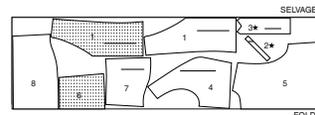



60" (150CM)  
WITH NAP  
ALL SIZES

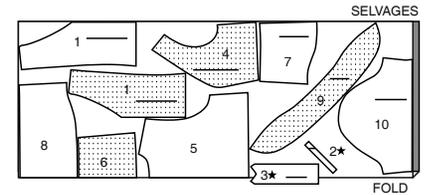

### TOP B


PIECES 1 2 3 4 5 6 7 8 9 10

45" (115CM)  
WITH NAP  
ALL SIZES

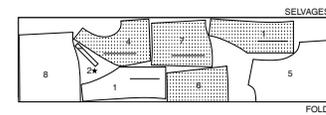



CUTTING LAYOUTS CONTINUED ON PAGE 2

60" (150CM)  
WITH NAP  
ALL SIZES

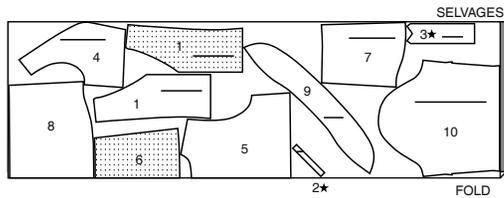


**TOP C**  
PIECES 1 3 4 5 6 7 8 9 11 12

45" (115CM)  
WITH NAP  
ALL SIZES

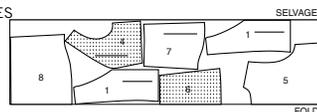

60" (150CM)  
WITH NAP  
ALL SIZES

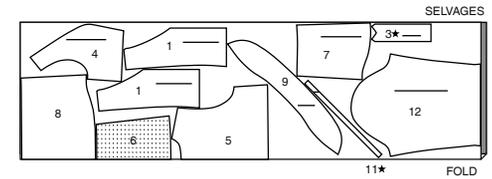

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at [simplicity.com/sewingtutorials](http://simplicity.com/sewingtutorials)

**Sewing Directions**


**FABRIC KEY** RIGHT SIDE WRONG SIDE INTERFACING LINING LINING

Read **General Directions** on page 1 before you begin.  
Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available.  
Scan QR CODE to watch videos:

- NARROW HEM** - see Hems: "sewing narrow hems" video.
- EDGESTITCH** - see Machine Stitches: "how to edgestitch" video.
- REINFORCE** - see Machine Stitches: "how to reinforce" video.
- STAYSTITCH** - see Machine Stitches: "how to do stay-stitching" video.
- UNDERSTITCH** - see Machine Stitches: "how to understitch" video.
- FINISH** - see Seams: "how to finish seam allowances" video.
- SLIPSTITCH** - Slide needle through a folded edge, then pick up a thread of underneath fabric.
- INTERFACING** - Pin interfacing to WRONG side of fabric. Fuse interfacing in place following manufacturer's directions.

**TOP A, B, C**

**UPPER FRONT AND BACK**

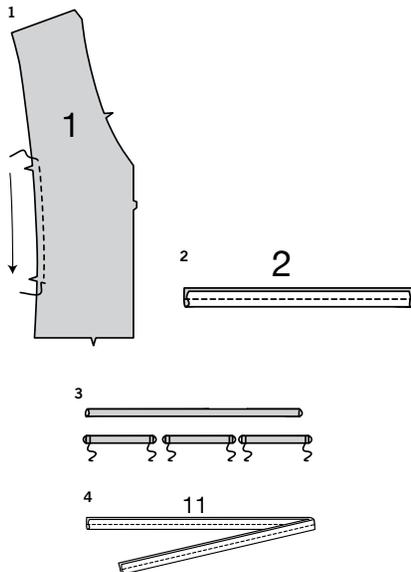

- 1. STAYSTITCH** side edge of upper front (1) between notches in direction of arrow.  
**NOTE:** Remaining upper front sections will be used as facing.




**FOR VIEWS A, B-**

- 2.** With **RIGHT** sides together, fold loops (2) in half lengthwise. Stitch in a 1/4" (6mm) seam, leaving ends open. Trim seam.

- 3.** Turn **RIGHT** side out. Press. Cut loops into three sections, each 1 1/4" (3.2cm) long. Baste ends.

**FOR VIEW C**

- 4.** With **RIGHT** sides together, fold loops (11) in half lengthwise. Stitch in a 1/4" (6mm) seam, leaving ends open. Trim seam.

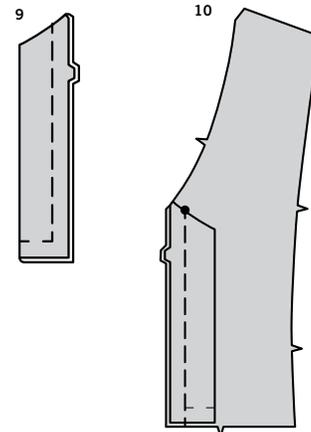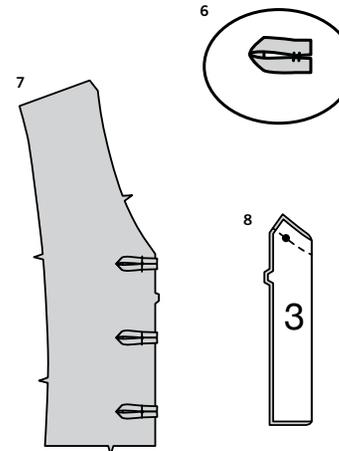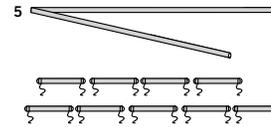


- 5.** Turn **RIGHT** side out. Press. Cut loops into nine sections, each 1 1/4" (3.2cm) long. Baste ends.

**CONTINUE AS FOLLOWS FOR ALL VIEWS**


- 6.** Bring ends together, having raw edges even. Tack, as shown.
- 7.** On **OUTSIDE**, pin loops to **RIGHT** upper front, centering over small dots, having raw edges even. Baste.  
**NOTE:** For View C, remaining loops will be used for sleeve.
- 8.** With **RIGHT** sides together, fold underlap (3) in half lengthwise, matching notches and large dots. Stitch upper edge. Trim seam.
- 9.** Turn **RIGHT** side out. Press. Baste raw edges.
- 10.** On **OUTSIDE**, pin underlap to **LEFT** upper front edge, matching notches and large dots. Baste.

S9890


3 of 4

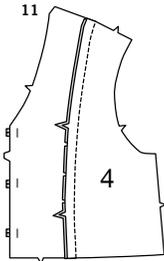

**11.** With RIGHT sides together, pin one upper side front (4) section to each upper front, matching notches, clipping upper front where necessary. Baste. Stitch.

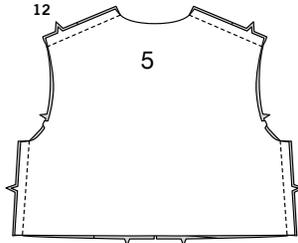


**12.** Stitch upper back (5) to upper fronts at shoulders and sides.

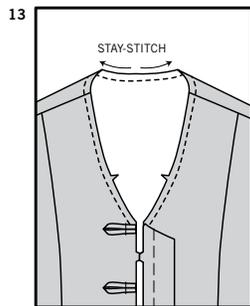

#### COLLAR AND FACING


**13.** STAYSTITCH neck edge in direction of arrow.

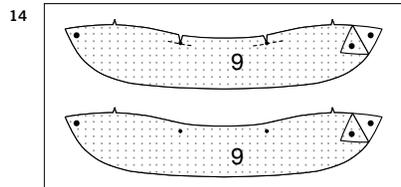


**14.** Apply INTERFACING to collar (9). For facing, REINFORCE one collar section through small dots, as shown. Clip to small dots.




**15.** Press under seam allowance between clips. Trim pressed seam allowance to 3/8" (1cm).

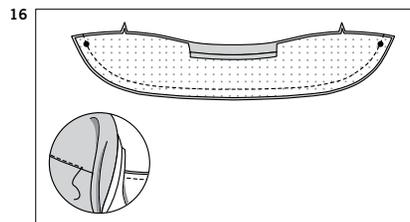

**16.** With RIGHT sides together, pin collar to collar facing, matching centers. Stitch long unnotched edge. Trim seam. UNDERSTITCH collar.




**17.** Turn RIGHT side out. Press. Baste raw edges.

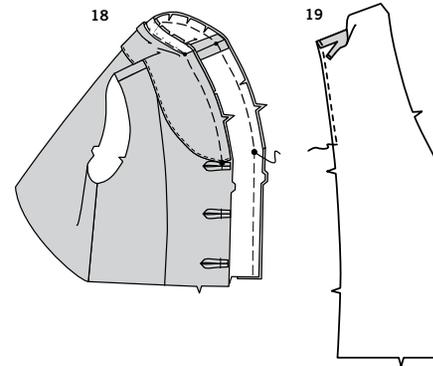


**18.** On OUTSIDE, pin collar to neck edge, facing side up, matching centers and large dots, placing small dots at shoulder seams, clipping neck edge where necessary. Baste.


**19.** FINISH inner edge of upper front facing. Press under seam allowances on shoulder edges. Trim pressed seam allowances to 3/8" (1cm).

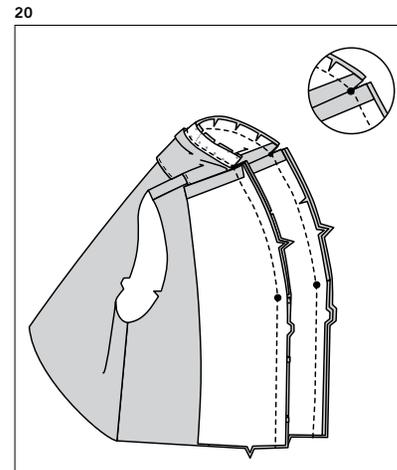


**20.** With RIGHT sides together, pin facing to upper front, over collar, matching dots and notches. Stitch front opening and neck edges, keeping pressed edge of collar free. Trim seam. Clip seam allowances at shoulders. UNDERSTITCH facing.

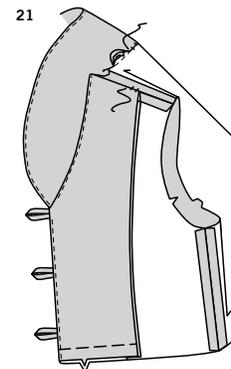

**21.** Turn facing to INSIDE, turning collar out. Press seam toward collar between clips. SLIPSTITCH pressed edge over seam. Tack front facing shoulder edges to seam allowances. Baste lower edges.




22. EDGESTITCH seam between clips.

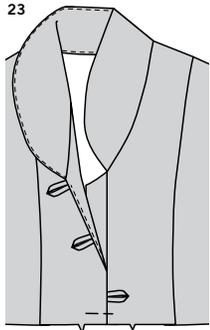


23. Lap RIGHT front over LEFT, matching centers. Baste across lower edges.


### LOWER FRONT, SLEEVE AND FINISHING



24. With RIGHT sides together, pin lower side front (7) sections to lower front (6) at sides, matching notches. Stitch.

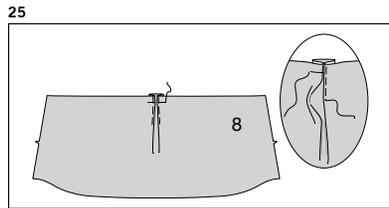


25. To make pleat in lower back (8), fold along solid lines. Bring folds to center. Baste. Baste across upper edge.

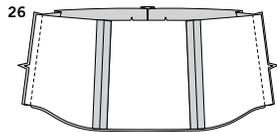


26. Stitch lower front to lower back at sides.



27. Make **NARROW HEM** at lower edge.

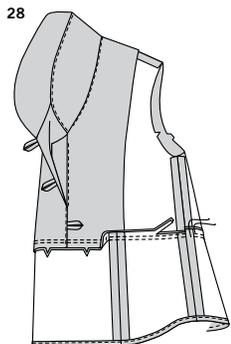


28. With RIGHT sides together, pin lower front and back to upper front and back matching centers and seams. Stitch. Stitch again 1/4" (6mm) away in seam allowances. Trim close to second stitching. Press seam down.

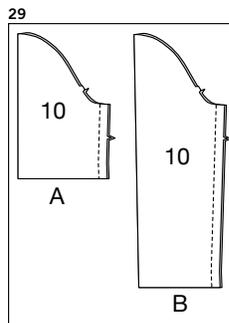


FOR VIEWS A, B

29. Stitch sleeve (10) seam.




30. Turn up 1 1/4" (3.2cm) hem on lower edge of sleeve. Turn 1/4" (6mm) on raw edge of hem to wrong side; press. Baste close to inner edge of hem. On OUTSIDE, stitch as basted.

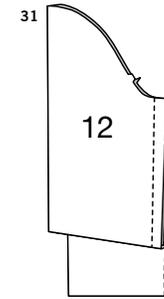


FOR VIEW C


31. Stitch sleeve (12) seam.




32. Turn up 1 1/4" (3.2cm) hem on lower edge of sleeve. Turn 1/4" (6mm) on raw edge of hem to wrong side; press. Baste.



33. Pin remaining loops to sleeve front, centering over small dots, as shown, having raw edges toward sleeve back. Baste.

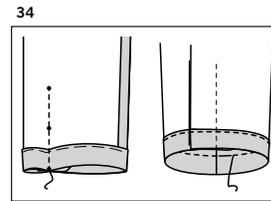


34. To form pleat in sleeve, on INSIDE, bring broken lines together, matching small dots. Baste. Stitch along broken line to upper small dot. Press pleat toward sleeve front. Stitch close to inner edge of hem, as shown, continuing along pleat.




35. Using loops as guides, make button markings in sleeve. Sew buttons to sleeve at markings, as shown.

### CONTINUE AS FOLLOWS FOR ALL VIEWS



36. With RIGHT sides together, pin sleeve to armhole edge with center small dot at shoulder seam, matching notches and remaining small dots. Stitch. Stitch again 1/4" (6mm) away in seam allowances. Trim close to second stitching. Press seam toward sleeve.

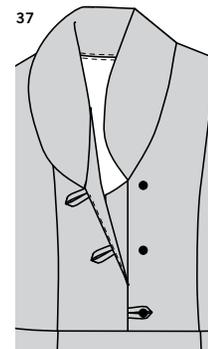

37. Using loops as guides, make button markings in LEFT upper front. Sew buttons to LEFT upper front at markings, as shown.



# Congrats!

You've completed your sewing adventure

---

**SHARE  
YOUR** LOOK



Post your pattern and tag us  
**@simplicity\_creative\_group** and **#simplicitypatterns**  
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at  
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA [www.thedesigngroup.com](https://www.thedesigngroup.com) • All Rights Reserved. [www.simplicity.com](https://www.simplicity.com) • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.