

S9894

miG A DIY & LIFESTYLE BRAND



Simplicity
by design

Designed and printed in USA.

Average

MISSES' AND WOMEN'S TOP (WITH B,C,D CUP SIZES FOR MISSES' AND C,D,DD CUP SIZES FOR WOMEN'S) AND SKIRT IN TWO LENGTHS

Suggested Fabrics: Boucle, Cotons, Denim, Linens, Rayon, Sateen. A also in Brocades, Damask, Taffeta. **Lining:** Lining Fabrics. **Interfacing:** Lightweight Fusible.

Notions: A: One 7" (18cm) separating zipper, pair of bra underwires (for B,C,D or DD Cup). B: One 7" (18cm) invisible zipper.

Sizes	10	12	14	16	18	20W	22W	24W	26W	28W
European	36	38	40	42	44	46	48	50	52	54

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	32½	34	36	38	40	42	44	46	48	50	Ins.
Waist	25	26½	28	30	32	35	37	39	41½	44	"
Hip-9" below waist	34½	36	38	40	42	44	46	48	50	52	"
Back-neck to waist	16	16¼	16½	16¾	17	17¼	17½	17¾	17¾	17¾	"

Top A	45**	¾	¾	¾	¾	¾	¾	¾	¾	¾	1	Yd.
	60**	¾	¾	¾	¾	¾	¾	¾	¾	¾	¾	"
Lining	45**	¾	¾	¾	¾	¾	¾	¾	¾	¾	¾	"
Interfacing	20" - 1¼ yds.											

Skirt B	45**	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	2	Yds.
	60**	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	"

Interfacing B,C - 20" - ¼ yd.												
Skirt C	45**	3¾	3¾	3¾	3¾	4	4¼	4¼	4¼	4¼	4¼	Yds.
	60**	2¾	2¾	2¾	2¾	2¾	2¾	2¾	2¾	2¾	2¾	"

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

B Bust Cup	35½	37	39	41	43	-	-	-	-	-	-	Ins.
C Bust Cup	36½	38	40	42	44	43	45	47	49	51	53	"
D Bust Cup	37½	39	41	43	45	44	46	48	50	52	54	"
DD Bust Cup	-	-	-	-	-	45	47	49	51	53	55	"
B,C Waist	26	27½	29½	31½	33½	35	37	39½	42	44½	47	"
B Hip	44	45½	47½	49½	51½	53¾	55¾	57¾	59¾	61¾	64	"
Width, lower edge												
Skirt B	63	64½	66½	68½	70½	75	77	79	81	83	85	Ins.
Finished back length from waist												
Skirt B	18	18	18	18	18	19	19	19	19	19	19	Ins.
Skirt C	36	36	36	36	36	37	37	37	37	37	37	"

*with nap **without nap

Moins Facile

HAUT (AVEC TAILLES DE BONNET B, C, D POUR JEUNES FEMMES ET C, D, DD POUR FEMMES) ET JUPE EN DEUX LONGUEURS POUR JEUNES FEMMES ET FEMMES

Tissus Conseillés: Bouclé, Cotons, Denim, Toiles de lin, Rayonne, Satin. A aussi en Brocat, Damas, Taffetas. **Doubleure:** Tissus à doubleure. **Entoilage:** thermocollant léger.

Mercerie: A : 1 fermeture à glissière séparable de 18cm, 1 paire d'armatures pour soutien-gorge (pour bonnet B, C, D ou DD). B : 1 fermeture à glissière invisible de 18cm.

Tailles	10	12	14	16	18	20W	22W	24W	26W	28W
Françaises	38	40	42	44	46	48	50	52	54	56
Européen	36	38	40	42	44	46	48	50	52	54

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	83	87	92	97	102	107	112	117	122	127	cm
Taille	64	67	71	76	81	89	94	99	105	112	"
Hanches (23cm au-dessous de la taille)	88	92	97	102	107	112	117	122	127	132	cm
Dos du cou à la taille	40.5	41.5	42	42.5	43	44	44	44.5	45	45	"

Haut A	115cm*	0.6	0.7	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.9	m
	150cm*	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7	0.7	0.7	"
Doubleure	115cm**	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	m
Entoilage	51cm - 1.6m											

Jupe B	115cm*	1.3	1.3	1.3	1.3	1.3	1.4	1.4	1.6	1.7	1.8	m
	150cm*	1.0	1.0	1.0	1.0	1.0	1.0	1.4	1.4	1.4	1.4	"

Entoilage B,C - 51cm - 0.8m												
Jupe C	115cm*	3.2	3.3	3.4	3.5	3.5	3.9	4.0	4.2	4.3	4.3	m
	150cm*	2.2	2.2	2.2	2.2	2.2	2.4	2.4	2.5	2.5	2.5	"

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)




B Poitrine- Bonnet	90	94	99	104	109	-	-	-	-	-	-	cm
C Poitrine- Bonnet	93	97	102	107	109	109	114	119	124	130	130	"
D Poitrine- Bonnet	95	99	104	109	114	112	117	122	127	132	132	"
DD Poitrine- Bonnet	-	-	-	-	-	114	119	124	130	135	135	"
B,C Taille	66	70	75	80	85	89	94	100	107	113	113	"
B Hanches	112	116	121	126	131	137	142	147	152	157	157	"
Largeur à l'ourlet												
Jupe B	160	164	169	174	179	191	196	201	206	211	211	cm
Largeur finie - dos, taille à l'ourlet												
Jupe B	46	46	46	46	46	48	48	48	48	48	48	cm
Jupe C	91	91	91	91	91	94	94	94	94	94	94	"

*avec sens **sans sens




Simplicity

Thank you for purchasing this Simplicity pattern.
We made every effort to provide you with a high quality product.

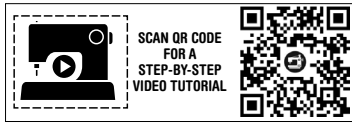

miG A DIY & LIFESTYLE BRAND

14 PIECES

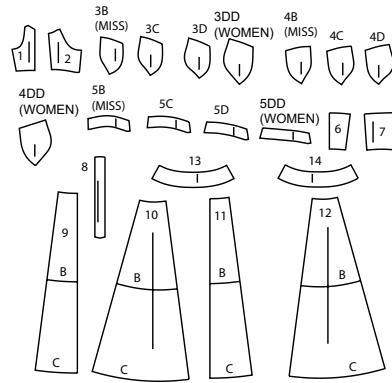

- | | |
|-------------------------------------|-----------------------------------|
| 1 FRONT-A | 5D BRA BAND - A (D CUP) |
| 2 SIDE FRONT-A | 5DD BRA BAND - A (DD CUP - WOMEN) |
| 3B BRA - A (B CUP - MISS) | 6 BACK-A |
| 3C BRA - A (C CUP) | 7 SIDE BACK-A |
| 3D BRA - A (D CUP) | 8 SHOULDER STRAP - A |
| 3DD BRA - A (DD CUP - WOMEN) | 9 FRONT-B,C |
| 4B BRA (SIDE) - A (B CUP - MISS) | 10 SIDE FRONT-B,C |
| 4C BRA (SIDE) - A (C CUP) | 11 BACK-B,C |
| 4D BRA (SIDE) - A (D CUP) | 12 SIDE BACK-B,C |
| 4DD BRA (SIDE) - A (DD CUP - WOMEN) | 13 FRONT WAISTBAND-B,C |
| 5B BRA BAND - A (B CUP - MISS) | 14 BACK WAISTBAND-B,C |
| 5C BRA BAND - A (C CUP) | |


General Directions

The Pattern

- SYMBOLS**
- GRAIN LINE: Place on straight grain of fabric parallel to selvage
 - PLACE SOLID LINE on fold of fabric.
 - CENTER FRONT OR BACK OF GARMENT.
 - NOTCHES
 - DOTS
 - CUTTING LINE
 - LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
Make adjustments before placing pattern on fabric.



TO LENGTHEN: Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

TO SHORTEN: At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking


BEFORE CUTTING:
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.
PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts


AFTER CUTTING:
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.

- To Quick Mark:**
- Snip edge of fabric to mark notches, ends of fold lines and center lines.
 - Pin mark dots.




Sewing

- SEW garment following Sewing Directions.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.




SPECIAL CUTTING NOTES

★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.

✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).



THE FIT THAT MAKES THE FASHION....HOW TO DETERMINE YOUR BUST CUP SIZE

No two people have exactly the same shape even though they may take the same size. If you are a B, C, D or DD cup, you can now customize the fit of your garment without having to make time consuming adjustments. Simplicity has done this for you by including separate front pattern pieces. Choose the front pattern for your particular cup size.

To check your cup size, take your bust (A) and high bust (B) measurements and record them.

FOR MISSES' SIZE PATTERNS:

If your bust is 1" to 2" (2.5cm-5cm) larger than your high bust measurement, you are a **B cup**.

If your bust is 2" to 3" (5cm-7.5cm) larger than your high bust measurement, you are a **C cup**.

If your bust is 3" to 4" (7.5cm-10cm) larger than your high bust measurement, you are a **D cup**.

FOR WOMEN'S SIZE PATTERNS:

If your bust is 2" to 3" (5cm-7.5cm) larger than your high bust measurement, you are a **C cup**.

If your bust is 3" to 4" (7.5cm-10cm) larger than your high bust measurement, you are a **D cup**.

If your bust is 4" to 5" (10cm-12.5cm) larger than your high bust measurement, you are a **DD cup**.

FOR MISSES' BUST B CUP:

Use bra pattern 3B, bra side pattern 4B, and bra band pattern 5B.

FOR MISSES' AND WOMEN'S BUST CUP C:

Use bra pattern 3C, bra side pattern 4C, and bra band pattern 5C.

FOR MISSES' AND WOMEN'S BUST CUP D:

Use bra pattern 3D, bra side pattern 4D, and bra band pattern 5D.


FOR WOMEN'S BUST CUP DD:

Use bra pattern 3DD, bra side pattern 4DD, and bra band pattern 5DD.

FOR ALL VIEWS:

Use front pattern 1, side front pattern 2, back pattern 6, side back pattern 7, and shoulder strap pattern 8.

Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE


TOP A

USE PIECES 1 2 3 4 5 6 7 8

45" (115CM)
WITH NAP
SIZES 10 12 14 16 18



45" (115CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W




CUTTING LAYOUTS CONTINUED ON PAGE 2

S9894


2 of 4

60" (150CM)
WITH NAP
SIZES 10 12 14 16 18



FOLD

60" (150CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W




5 FOLD

LINING


USE PIECES 1 2 3 4 6 7

45" (115CM)
WITHOUT NAP
SIZES 10 12 14 16 18



FOLD

45" (115CM)
WITHOUT NAP
SIZES 20W 22W 24W
26W 28W




FOLD


INTERFACING

USE PIECES 1 2 3 4 5 6 7 8

20" (51CM)
ALL SIZES

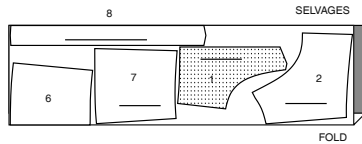

FOLD




FOLD

SKIRT B


USE PIECES 9 10 11 12 13 14

45" (115CM)
WITH NAP
SIZES 10 12 14 16 18

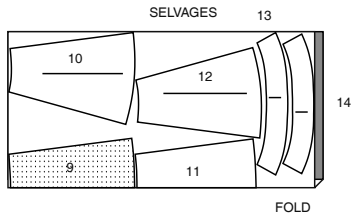

FOLD


45" (115CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W

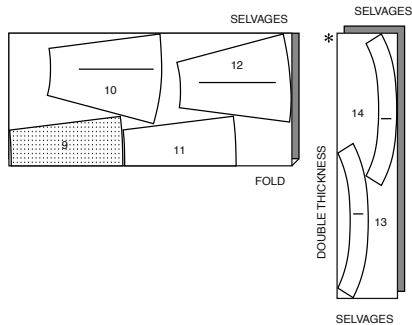

DOUBLE THICKNESS


SELVAGES

60" (150CM)
WITH NAP
SIZES 10 12 14 16 18



FOLD

60" (150CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W




FOLD

INTERFACING B,C

USE PIECES 13 14

20" (51CM)
ALL SIZES

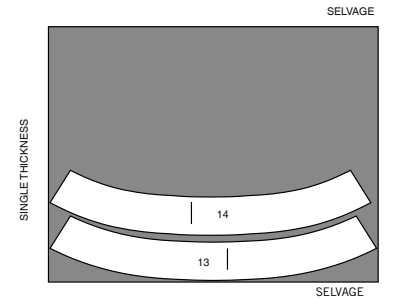


SINGLE THICKNESS

SELVAGE

SKIRT C


USE PIECES 9 10 11 12 13 14

45" (115CM)
WITH NAP
SIZES 10 12 14 16 18

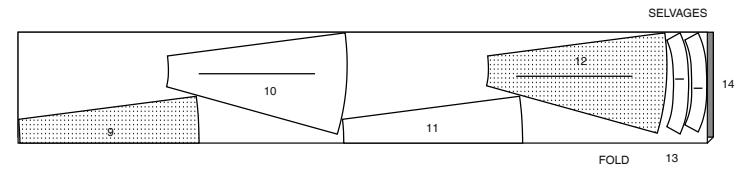

FOLD

45" (115CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W

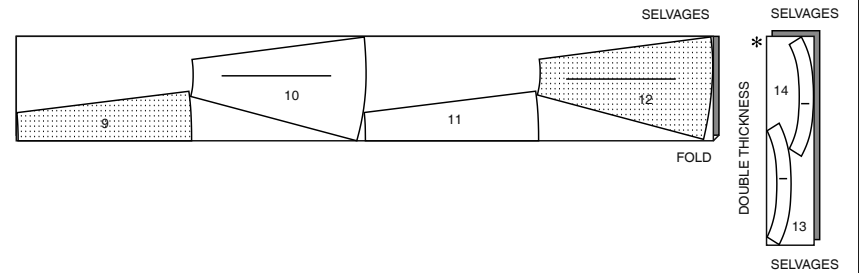


FOLD

DOUBLE THICKNESS


SELVAGES

60" (150CM)
WITH NAP
SIZES 10 12 14 16 18

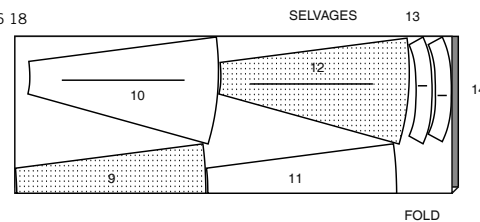

FOLD


60" (150CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W




FOLD



SCAN QR CODE
FOR A
STEP-BY-STEP
VIDEO TUTORIAL




EDGE-STITCH








STAY-STITCH



UNDERSTITCH



TOP-STITCH



Sewing Directions

FABRIC KEY RIGHT SIDE WRONG SIDE INTERFACING LINING LINING

Read **General Directions** on page 1 before you begin.

Sewing procedures **BOLD** in Sewing Directions are defined below.

EDGE-STITCH - On **OUTSIDE**, stitch close to finished edge or seam, adjusting the stitch length and/or tension as necessary; test first.

STAY-STITCH - Stitch 1/2" (1.3cm) from cut edge in direction of arrows. This stitching stays in permanently to prevent stretching on curved edges. (Shown only in the first illustration).

UNDERSTITCH - Press facing and seam away from garment, stitching through facing and seam allowances close to seam.

TOP-STITCH - On **OUTSIDE**, stitch 1/4" (6mm) from finished edge or seam as specified in sewing directions, unless otherwise instructed. Adjust stitch length and/or tension as necessary; test first.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

TOP A

1. Apply fusible interfacing to **WRONG** side of front (1), side front (2), bra (3B, 3C, 3D or 3DD), side front (4B, 4C, 4D or 4DD), bra band (5B, 5C, 5D, or 5DD), back (6), and side back (7), and shoulder strap (8) sections.


2. Stitch center front seam of front sections, matching double notches; press seam open. Stitch side front sections to front, matching single notches; press seam toward center.

3. **STAY-STITCH** inner curved edges, as shown. **TOP-STITCH** inner seams of front sections and on each side of center front seam, as shown.


4. Stitch bra to bra side, matching single notches. Press seam towards double notches. **TOP-STITCH** inner seam of bra.

5. Press under seam 5/8" (1.5cm) allowance on unnotched edge of bra band; trim to 3/8" (1cm). **TIP**- Using a clear ruler and a washable fabric marking pen or pencil, mark seamline on unnotched edge; press under along marking and trim.

6. With **RIGHT** sides facing up towards you, pin band over bra, matching notches and having raw edges even. Baste raw edges together. **EDGE**STITCH close to lower edge of band.

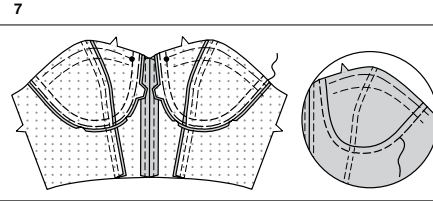


7. Pin bra to front, matching seams and small dots, having raw edges even, making shallow clips where necessary. Stitch. To make tunnel for underwire, baste 1/4" (6mm) away from first stitching within seam allowance, basting through all thicknesses. On **OUTSIDE**, **TOP-STITCH** as basted; remove basting.

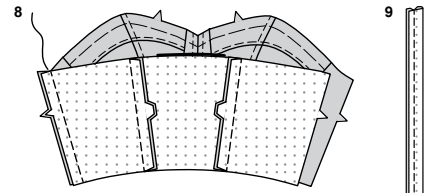


8. Stitch side back to back, matching double notches; press seam allowances towards center. Stitch back to front at **RIGHT** side seam; press seam open.

9. Fold shoulder strap in half, lengthwise, with **RIGHT** sides together. Stitch long edges together in a 3/8" (1cm) seam, leaving ends open.

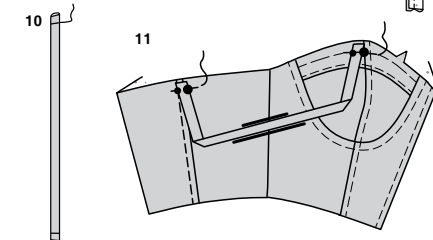


10. Turn strap **RIGHT** side out; press. Baste raw edges together.

11. **TOP-STITCH** inner seams of back. On **OUTSIDE**, baste straps to upper edge of front and back a scant 5/8" (1.5cm) from raw edges, matching small and large dots.




NOTE: Underwires usually have front and side ends. If not noted on underwire, place wire under your bust or compare to an underwire bra to determine front and side ends.


12. Insert underwire into tunnel. Stitch a scant 5/8" (1.5cm) from raw edges, encasing wire.

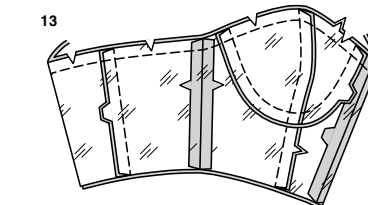

13. Stitch seams of top lining sections and press in same direction as for top, omitting top-stitching and tunnel stitching around bra. With **RIGHT** sides together and raw edges even, pin lining to top along upper edges (over straps), matching centers and seams. Stitch upper edges together, pivoting with needle in fabric at center front. Trim seam; clip curves. **UNDERSTITCH** upper edge.

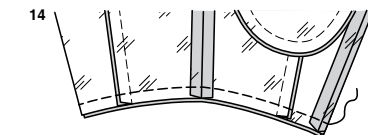


14. With **RIGHT** sides together and raw edges even, pin lining to top along lower edges, matching centers and seams. Stitch lower edges together.

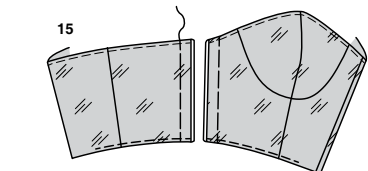


15. **UNDERSTITCH** lower edge of lining as far as possible. Turn top **RIGHT** side out; press. Baste raw edges together.

16

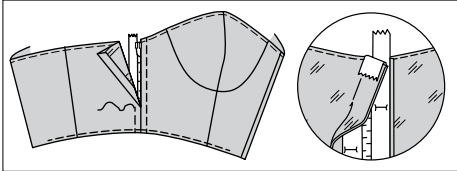

17



NOTE: If the zipper is longer than the opening, extend excess length beyond finished edge. Turn upper end of zipper over seam allowance; trim to 5/8" (1cm), and continue with instructions below.
If desired, a custom sized zipper can be purchased online.

- 16.** Press under 5/8" (1.5cm) on LEFT side seam edges. Pin closed zipper under pressed edges, placing bottom stop at lower finished edge and top stop at upper finished edge, having pressed edges meet at center of zipper. Turn upper end of zipper tape over seam allowance. Hand-baste in place. Using an adjustable zipper foot, on OUTSIDE, stitch 1/4" (6mm) from pressed edges, catching in zipper tape. Remove basting.

- 17.** On INSIDE, invisibly tack lining to top along under bust seam, making sure to line up seams.

SKIRT B, C

NOTE: View B will be illustrated unless otherwise indicated.

- 1.** Stitch side front (10) sections to front (9), matching single notches. Press seam towards front. **STAY-STITCH** upper edge.


- 2.** Stitch back (11) to side back (12), matching double notches. **STAY-STITCH** upper edge.

- 3.** Stitch back to front at RIGHT side seam.


- 4.** Apply fusible interfacing to front waistband (13) and back waistband (14) sections. Stitch RIGHT side seam of waistband sections, matching notches.

- 5.** Pin waistband to upper edge of skirt, matching centers and RIGHT side seams, clipping skirt to staystitching where necessary. Stitch. Trim seam; clip curves. Press seam toward waistband. The remaining waistband sections will be used as the waistband facings.

6



7



NOTE: Stitch the invisible zipper using an invisible zipper foot. Before you begin, be sure to line up your needle with the center of the invisible zipper foot or you may break your needle. When the coils are to the LEFT of the raw edge use the LEFT groove and when the coils are to the RIGHT of the raw edge use the RIGHT groove.

- 6.** Open zipper and press tape flat on WRONG side unrolling the coils. Do not press coils. (Use a low iron setting.) On OUTSIDE, pin RIGHT side of zipper face down on RIGHT side of zipper opening (left back). Have the coil along the seam line, the tape within the seam allowance and the top stop 3/4" (2cm) below upper edge, as shown. Hand-baste along center of tape. Position zipper foot at top of zipper with RIGHT groove of foot over coil. Stitch along tape to notch. Back-stitch to reinforce.

- 7.** Pin remaining half of zipper to LEFT side of zipper opening (left front) in same manner. Make sure that upper and lower edges of skirt are even. Hand-baste along center of tape. Position zipper foot at the top of zipper with LEFT groove over the coil. Stitch along tape to notch. Back-stitch to reinforce.

- 8.** Close zipper and check that it is invisible from OUTSIDE. Pull free ends of zipper tape away from seam allowance. Pin remaining LEFT seam together below zipper. Position zipper foot all the way to the LEFT so the needle goes down through the outer notch of the foot. Start stitching seam 1/4" (6mm) above lowest stitch and slightly to the LEFT. Stitch seam for about 3" (7.5cm). Stitch remainder of seam using your regular presser foot. If you prefer, open out each seam allowance at end of zipper and stitch tape to seam allowance.

- 9.** Stitch RIGHT side seam of waistband facing sections, matching notches. Press under 1/2" (1.3cm) on lower notched edge of waistband.


- 10.** Open out LEFT opening edges of skirt, rolling zipper teeth away from opening edge. With RIGHT sides together, pin facing to skirt matching centers and side seams. Stitch upper edge. Trim seam; clip curves.

- 11.** Pin back opening edges together. Using an adjustable zipper foot, stitch 1/2" (1.3cm) from back edges, keeping zipper teeth free. Trim corners. Do not trim center back edges.

- 12.** **UNDERSTITCH** facing as far as possible. Turn facing and LEFT edges to INSIDE, rolling zipper teeth back in place; press. On INSIDE, pin pressed edge of facing 1/8" (1.3cm) over seam, placing pins on OUTSIDE. (Finished edge of facing extends below seam.) On OUTSIDE, stitch in the ditch or groove of seam between zipper, catching in finished edge of facing on INSIDE. **TIP:** To conceal stitches in the ditch or groove of seam, try using a zipper foot, spreading the skirt and band away from seam with your fingers.

- 13.** Press up hem on lower edge of skirt. To form narrow hem, tuck under raw edge to meet crease. Press. Stitch hem in place.


8

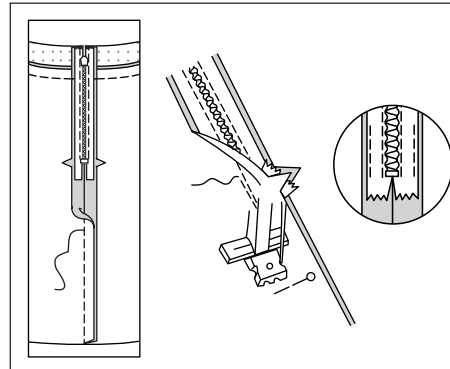


9




10




11



12



13





Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700

Simplicity
by design™

Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.