

S9895

Simplicity



A



C



B



C

Designed and printed in USA.



B,C

Average

Moins Facile

MISSES' AND WOMEN'S KNIT JACKET AND LEGGINGS

Suggested Fabrics: A,B: Double Knits, Fleece, Jersey, Stretch Velvet, Sweatshirting. C in Stretch Knits only such as Jersey, Spandex. See Pick-A-Knit® Rule.

Notions: A,B: ¼" (6mm) featherweight boning (opt.): 2¼ yds. (2.5m) for Misses', 3 ½ yds. (2.9m) for Women's. **Also for A:** One 20" (51cm) separating zipper, adjust to fit. **Also for B:** ½ yd. (0.4m) of hook and eye tape. **C:** 2" (5cm) elastic: 1 ½ yds. (1.4m) for Misses', 2 yds. (1.9m) for Women's, two 7" (18cm) zippers.

MISSES' SIZES	10	12	14	16	18
EUROPEAN	36	38	40	42	44

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	32½	34	36	38	40	Ins.	"
Waist	25	26½	28	30	32	"	"
Hip-9" below waist	34½	36	38	40	42	"	"
Back-neck to waist	16	16¼	16½	16¾	17	"	"

Jacket A	60**	1%	1%	1%	1%	1%	1%	Yds.
----------	------	----	----	----	----	----	----	------

Jacket B	60**	1%	1%	1%	1%	1%	1%	Yds.
----------	------	----	----	----	----	----	----	------

Leggings C	60**	1%	1%	1%	1%	1½	1½	Yds.
------------	------	----	----	----	----	----	----	------

WOMEN'S SIZES

EUROPEAN	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
	46	48	50	52	54	56	58	60	62	64

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	42	44	46	48	50	52	54	56	58	60	Ins.	"
Waist	35	37	39	41½	44	46½	49	51½	53	54½	"	"
Hip-9" below waist	44	46	48	50	52	54	56	58	60	62	"	"
Back-neck to waist	17¼	17½	17¾	17¾	17¾	17¾	18	18½	18¾	18¾	"	"

Jacket A	60**	1%	1%	1%	1%	1%	1%	1%	1%	1%	Yds.
----------	------	----	----	----	----	----	----	----	----	----	------

Jacket B	60**	1%	1%	1%	1%	1%	1%	2	2	2	Yds.
----------	------	----	----	----	----	----	----	---	---	---	------

Leggings C	60**	1%	2¼	2¼	2¼	2¼	2¼	2¼	2¼	2¼	Yds.
------------	------	----	----	----	----	----	----	----	----	----	------

NOTE: Please refer to the sewing instructions for FINISHED GARMENT MEASUREMENTS.

*with nap **without nap

VESTE ET COLLANT EN TRICOT POUR JEUNES FEMMES ET FEMMES

Tissus Conseillés: A,B: Tricotés doubles, Molleton, Jersey, Velours extensible, Tissus pour sweat-shirt. C en tricotés extensibles seulement tels que: Jersey, Élasthanne. Reportez-vous à la règle Pick-A-Knit®.

Mercerie: A,B: Baleine très légère de 6mm (facultatif): 2.5m pour jeunes femmes, 2.9m pour femmes. **Aussi pour A:** 1 fermeture à glissière séparable de 51cm, à ajuster. **Aussi pour B:** 0.4m d'agrafes sur bande. **C:** d'élastique de 5cm: 1.4m pour jeunes femmes, 1.9m pour femmes, 2 fermetures à glissière de 18cm.

TAILLES (J. FEMMES)	10	12	14	16	18
FRANÇAISES	38	40	42	44	46
EUROPÉEN	36	38	40	42	44

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	83	87	92	97	102	cm
Taille	64	67	71	76	81	"
Hanches (23cm au-dessous de la taille)	88	92	97	102	107	cm
Dos du cou à la taille	40.5	41.5	42	42.5	43	"

Veste A	150cm*	1.3	1.3	1.3	1.3	1.3	m
---------	--------	-----	-----	-----	-----	-----	---

Veste B	150cm*	1.1	1.3	1.3	1.3	1.3	m
---------	--------	-----	-----	-----	-----	-----	---

Collant C	150cm*	1.3	1.3	1.3	1.3	1.4	m
-----------	--------	-----	-----	-----	-----	-----	---

TAILLES (FEMMES)

FRANÇAISES	20W	22W	24W	26W	28W	30W	32W	34W	36W	38W
	48	50	52	54	56	58	60	62	64	66
EUROPÉEN	46	48	50	52	54	56	58	60	62	64

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	107	112	117	122	127	132	137	142	147	152	cm
Taille	89	94	99	105	112	118	124	130	134	138	"
Hanches (23cm au-dessous de la taille)	112	117	122	127	132	137	142	147	152	157	cm
Dos du cou à la taille	44	44	44.5	45	45	45.5	46	46	46.5	47	"


Veste A	150cm*	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.7	1.7	m
---------	--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

Veste A	150cm*	1.7	1.7	1.7	1.7	1.7	1.7	1.8	1.8	1.8	m
---------	--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	---


Collant C	150cm*	1.7	1.9	2.1	2.1	2.1	2.2	2.4	2.4	2.5	m
-----------	--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

NOTE: S'il vous plaît, reportez-vous aux instructions de couture pour les MESURES DU VÊTEMENTS FINI.

*avec sens **sans sens



A



B



C

Use the 1 inch (2.54cm) box to ensure you are using rule at 100%

Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.

PICK-A-KNIT® RULE

FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE
POUR CE PATRON - LE JERSEY DOIT S'ÉTIRER DANS LA LARGEUR DE 4" (10 cm) DEPUIS ICI
PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO ANCHO POR 4" (10 cm) DESDE AQUÍ






TO HERE 50%
JUSQUE LA 50%
HASTA ALLA 50%



When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.
Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

Simplicity

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

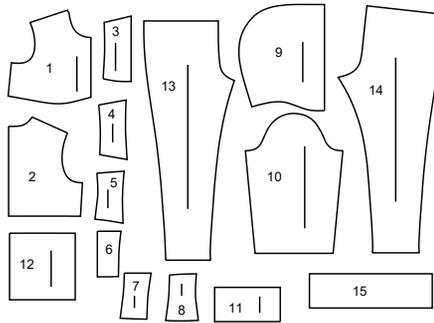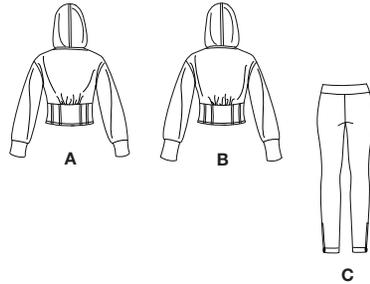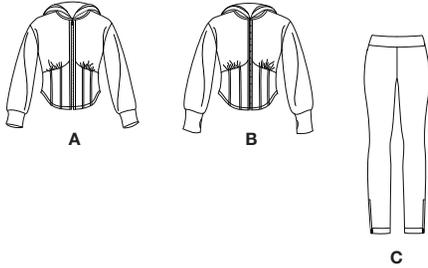

- 1 Upper Front-A,B
- 2 Upper Back-A,B
- 3 Lower Front-A,B
- 4 Lower Middle Front-A,B
- 5 Lower Side Front-A,B
- 6 Lower Back-A,B
- 7 Lower Middle Back-A,B
- 8 Lower Side Back-A,B
- 9 Hood-A,B
- 10 Sleeve-A,B
- 11 Sleeve Band-A
- 12 Sleeve Band-B
- 13 Front-C
- 14 Back-C
- 15 Casing-C

General Directions

The Pattern

- SYMBOLS**
- GRAIN LINE Place on straight grain of fabric parallel to selvage
 - PLACE SOLID LINE on fold of fabric.
 - CENTER FRONT OR BACK of garment.
 - NOTCHES
 - DOTS
 - CUTTING LINE
 - LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
Make adjustments before placing pattern on fabric.

TO LENGTHEN:
Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

TO SHORTEN:
At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING:
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.


CIRCLE your cutting layout.
PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING:
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.




Sewing

- SEW garment following Sewing Directions.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.

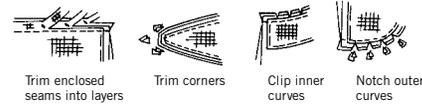


SPECIAL CUTTING NOTES

★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.


✳ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).



Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE


JACKET A

USE PIECES 1 2 3 4 5 6 7 8 9 10 11

60" (150CM) WITH NAP SIZES 10-12-14-16-18

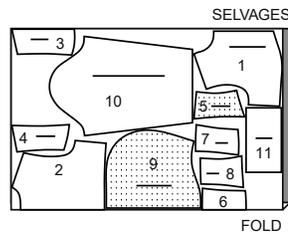


60" (150CM) WITH NAP SIZES 20W-22W-24W-26W-28W-30W-32W-34W-36W-38W

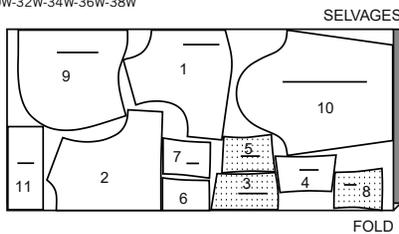


JACKET B

USE PIECES 1 2 3 4 5 6 7 8 9 10 12

60" (150CM) WITH NAP SIZES 10-12-14-16-18

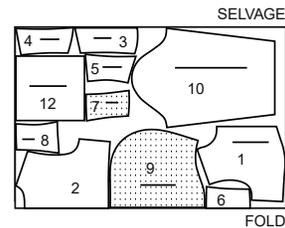


60" (150CM) WITH NAP SIZES 20W-22W-24W-26W-28W-30W-32W-34W-36W-38W

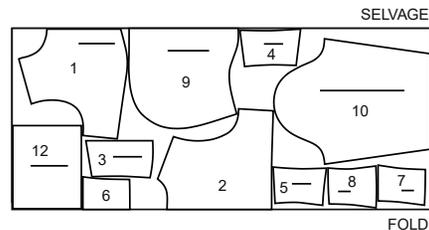


LEGGING C

USE PIECES 13 14 15

60" (150CM) WITH NAP SIZES 10-12-14-16-18

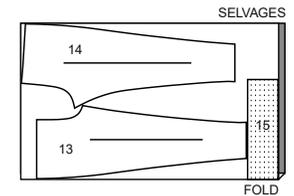

60" (150CM) WITH NAP SIZES 20W-22W-24W-26W-28W-30W-32W-34W-36W-38W

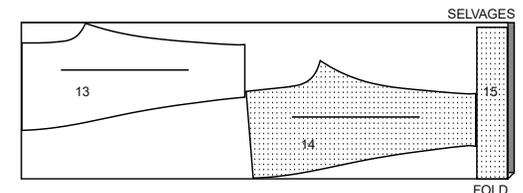

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at [simplicity.com/sewingtutorials](https://www.simplicity.com/sewingtutorials)

SIMPLY THE BEST SEWING TECHNIQUES FOR KNITS

- Use a ball point or stretch needle.
- Narrow zig-zag stitch or a stretch stitch.
- To prevent shoulder seams from stretching, pin center of hem tape, clear elastic or twill tape along seam line on front shoulder edges, then stitch the shoulder seams.

WITH OVERLOCK/SERGER

- The Overlock/Serger can be used alone or as a supplement to your conventional sewing machine.

Sewing Directions

FABRIC KEY RIGHT SIDE WRONG SIDE INTERFACING LINING LINING

Read **General Directions** on page 1 before you begin.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

EASE/GATHER – see Gathering: “sewing two row gathers” video.

NARROW HEM – see Hems: “sewing narrow hems” video.

SEAM CASING – see Seams: “how to sew casing, using sew allowance for boning” video.

SLEEVE – see Armholes/Sleeves: “sewing a set in sleeve” video.

SLIP STITCH – see Hand Stitching: “how to slip stitch” video.

TOPSTITCH – see Machine Stitches: “how to topstitch” video.



- Overlock sewing machines stitch, trim and finish all in one operation. Therefore, it is VERY important to Check Fit before stitching seams.
- Using matching color thread, baste seams and try garment on. If no adjustments are needed, overlock seams along basting.
- The three thread overlock is ideal for major seams such as shoulder, side, underarm and sleeve seams.
- For stress areas such as crotch seams and armholes, the four thread overlock/safety stitch is best...OR, use a three thread overlock, and stitch along seam with a conventional machine to reinforce.
- The two or three thread overlock stitch is a perfect finish for edges of facings, hems and seam allowances.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.


STITCH 5/8" (1.5CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

JACKET A, B


- 1. GATHER** lower edge of UPPER FRONT (1) sections.
- 2. GATHER** lower edge of UPPER BACK (2). Stitch upper back to upper front at side and shoulder edges.
- Stitch LOWER FRONT (3) to LOWER MIDDLE FRONT (4). Press seam toward front. This is the middle front seam.

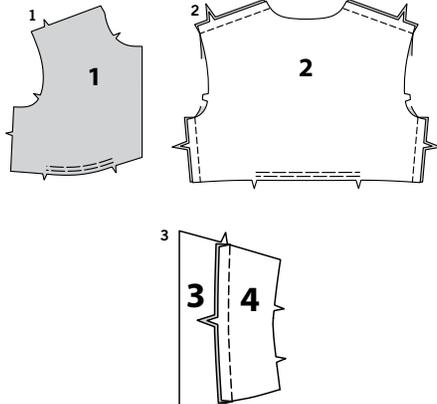


- Stitch lower middle front to LOWER SIDE FRONT (5). Press seam toward front. This is the side front seam.




- Stitch LOWER BACK (6) to LOWER MIDDLE BACK (7). Press seam toward back. This is the middle back seam.

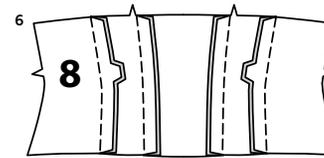

- Stitch lower middle back to LOWER SIDE BACK (8). Press seam toward back. This is the side back seam.

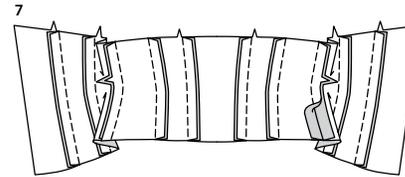


- Stitch lower front to lower back at side edges. Press seam open.

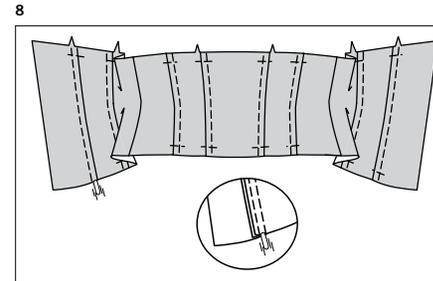


- Stitch 3/8" (1cm) from middle front seams, side front seams, middle back seams, and side back seams over the seam allowance through all thicknesses. This stitching will be casings for boning, if you prefer.


FOR OPTIONAL BONING – Cut strips of boning each the length of stitched casing, excluding upper and lower seam allowances. Remove boning from casing. Trim 1/4" (6mm) of boning from each end, curving ends, as shown. Insert boning between seam allowances. Baste 5/8" (1.5cm) from upper and lower edges of casing, being careful not to catch in boning.

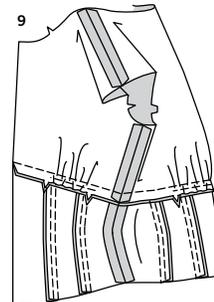


- With right sides together and raw edges even, pin upper front and back to lower front and back, matching centers, seams, and notches, pulling up gathering stitches to fit. Stitch. Press seam toward lower section.




- 10.** Press up 5/8" (1.5cm) hem allowance on lower edge of jacket.
NARROW HEM.

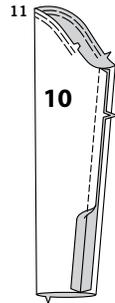


- 11.** EASE upper edge of SLEEVE (10) between the notches. Stitch underarm seam.




- 12.** Set in SLEEVE.

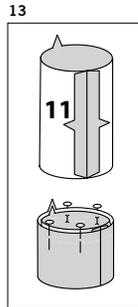


- 13.** FOR VIEW A – Stitch underarm seam of SLEEVE BAND (11), matching notches. Fold sleeve band in half, with wrong sides together and raw edges even; press. Pin.

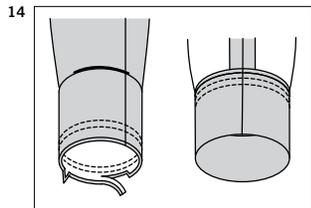

- 14.** On outside, pin band to lower edge of sleeve, matching seams and having raw edges even. Stitch, stretching band to fit. Stitch again 1/4" (6mm) from first stitching within the seam allowance. Trim close to second stitching. Press seam toward sleeve, pressing band out.


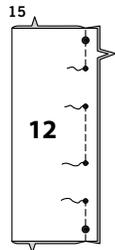


- 15.** FOR VIEW B – Pin underarm seam of SLEEVE BAND (12), matching notches. Stitch leaving openings between the small dots.



- 16.** Fold sleeve band in half along fold line. Open out one side of seam allowance between the small dots and stitch.

- 17.** Turn band to other side. Open out outer seam allowance between the small dots and stitch.

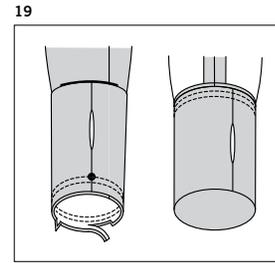

- 18.** Turn sleeve band right side out, bringing raw edges together, forming sleeve band with finished thumbhole edges.

- 19.** On outside, pin band to lower edge of sleeve, matching notches and having raw edges even. Stitch, stretching band to fit. Stitch again 1/4" (6mm) from first stitching within the seam allowance. Trim close to second stitching. Press seam toward sleeve, pressing band out.

ZIPPER A



NOTE: You may need to adjust the length of your Separating Zipper. Always shorten separating zippers from the top. Measure right front opening edge from lower hemmed edge to 7/8" (2.2cm) below upper edge. Mark the desired length on the zipper tape, measuring from the lower edge of the bottom stop. Cut off extra zipper 7/8" (2.2cm) above mark, making sure that the zipper pull is well below where you are going to cut. Do not discard the pieces. Using pliers, remove the teeth above your shortening mark and pry the top-stops open and remove them from the discarded pieces of zipper. Reinstall top stops by crimping them in place immediately above the last remaining tooth.

- 20.** Separate zipper. On outside, pin slider side of zipper face down on right front opening edge, with top stop at large dot, and lower end of zipper at lower edge of jacket; having zipper teeth just outside the seam allowance, as shown. Baste.

On outside, pin remaining side of zipper, face down on left front opening edge in same manner.


Make sure that both sides of tape are aligned. Baste. Using an adjustable zipper foot, stitch both sides of zipper in place 5/8" (1.5cm) from the front edge.

TIP – To avoid bumpy stitching around the tab and slider, stop stitching just before you get to the slider. Leaving the needle in the fabric, raise the presser foot and pull the slider down below the needle. Lower the presser foot and continue stitching.

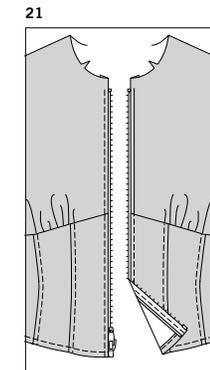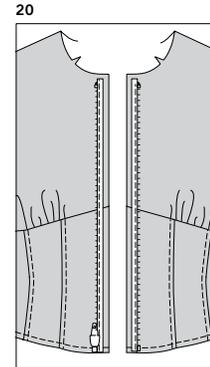

- 21.** Turn zipper tape to inside, turning out the teeth; press. On outside, TOPSTITCH front edge.


22

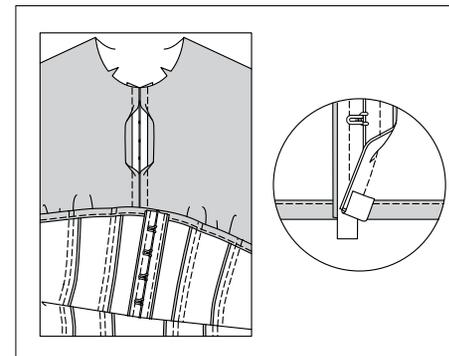

HOOK AND EYE TAPE B


NOTE: You will need to adjust the length of your Hook and Eye Tape. Measure right front opening edge from lower hemmed edge to upper edge, plus 7/8" (2.2cm). Mark the desired length on the tape, having upper hook 7/8" (2.2cm) from top of tape. Cut off extra tape above and below marks.

- 22.** Press under 5/8" (1.5cm) on front opening edges. Pin closed hook and eye tape under opening edges with top hook 7/8" (2.2cm) below upper edges of jacket, having edges meet at center of hook and eye tape. Turn lower ends of hook and eye tape over seam allowances. Baste. Stitch 1/4" (6mm) each side of center, using an adjustable zipper foot.

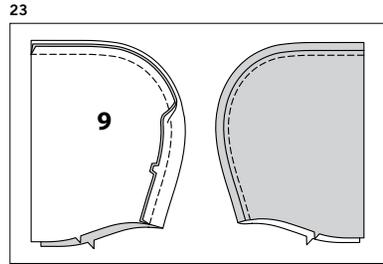


CONTINUE AS FOLLOWS FOR ALL VIEWS

23. Stitch center back edges of HOOD (9) sections together. Press seam toward right side. On outside, **TOPSTITCH** right of seamline, catching in seam allowances on the inside.

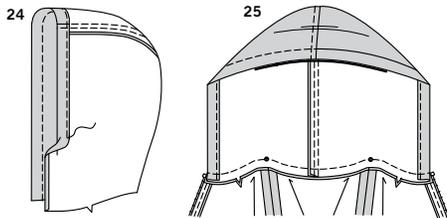


24. Turn front edge of hood to inside along foldline. Turn under raw edge 1/4" (6mm). Press. Stitch close to inner pressed edge.

25. With right sides together and raw edges even, pin hood to front, matching large dots and notches, placing small dots at shoulder seams. Stitch. Press seam toward jacket, pressing hood out.

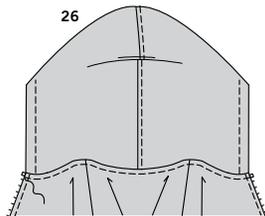


26. **TOPSTITCH** jacket along neck edge.

LEGGING C

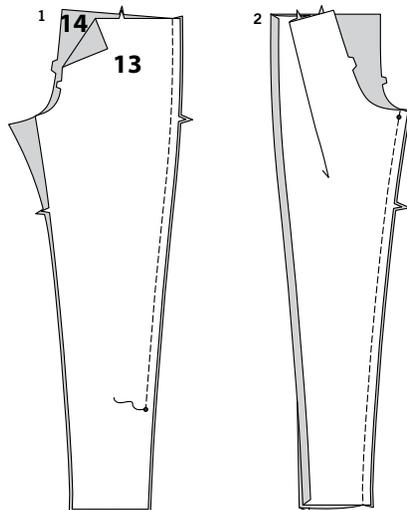


1. Stitch FRONT (13) to BACK (14) at side seams from upper edge to small dot, backstitching at dot to reinforce the seam. Press seam open.

2. Pin front to back at inner leg seams, matching small dots and notches. Stitch, stretching the back to fit.

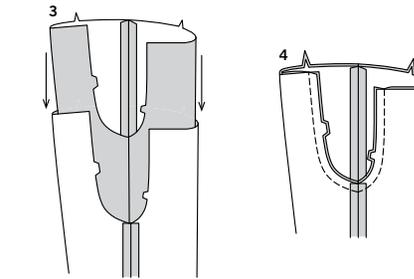


3. With right sides together, insert one pant leg inside the other.

4. With right sides together, pin center seam, matching inner leg seams and notches. Stitch. To reinforce seam, stitch again over first stitching.

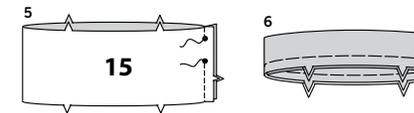


5. With right sides together, stitch center back seam of CASING (15), leaving an opening between small dots, as shown. Back-stitch at small dots to reinforce seam. Press seam open.

6. Fold casing in half, lengthwise, with wrong sides together, having raw edges even. Baste raw edges together. The side with the opening is the underside of the casing.

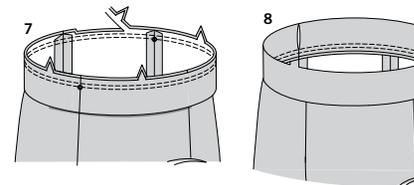


7. With the underside of casing facing you, pin casing to garment matching centers, placing small dots at side seams. Stitch along seam line. Stitch again 1/4" (6mm) from first stitching within seam allowance. Trim close to second stitching.

8. Press seam toward garment, pressing casing out.

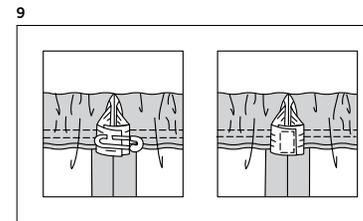


9. Cut a piece of elastic to fit waist, plus 1" (2.5cm). Insert elastic through opening in casing. Overlap ends and hold with a safety pin. Try on leggings and adjust to fit. Stitch ends of elastic together securely.

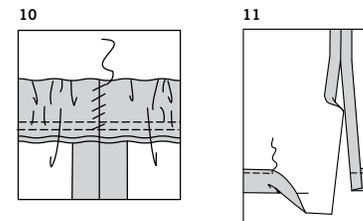

10. **SLIPSTITCH** opening edges of casing together. Distribute fullness evenly.

TIP – To secure elastic so it won't twist in wearing, stitch through all thicknesses of casing in the groove of each seam.

11. Press up 1-1/4" (3.2cm) hem allowance. Stitch 1" (6mm) from pressed edge.

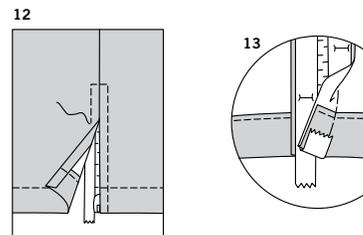

12. Press under 5/8" (1.5cm) on side opening edges. Pin closed zipper under opening edges with tab end even with lower edge of opening, having edges meet at center of zipper.

13. Turn upper ends of zipper tape over seam allowances. Baste. Stitch 1/4" (6mm) each side of center and across end, using an adjustable zipper foot.



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.