

S9898

Simplicity

easy-to-sew



A



B



C



A,B,C

Easy

BABIES' DRESS, PANTY AND HEADBAND

Suggested Fabrics: Cottons, Crinkle Gauze, Linens, Rayons, Sateen. **Headband C** also in: Interlock, Jersey. **Interfacing A:** Lightweight Fusible.

Notions: **A:** Seven 1/2" (1.3cm) buttons, one pkg. of 1/2" (1.3cm) single-fold bias tape, 1 1/2 yds. (1.4m) of 1/2" - 3/4" (1.3cm - 2cm) lace trim. **B:** 1 1/2 yds. (1.3m) of 1/2" (1.3cm) elastic. **C:** 8 1/4" (21cm) length of 1" (2.5cm) elastic.

Sizes	XXS	XS	S	M	L	
Age	—	1-3	6	12	18	mo.

BODY MEASUREMENTS: Select pattern size based on body measurements

	XXS	XS	S	M	L	
Weight	-7	7-13	13-18	18-21	21-24	lbs.
Height	-17	17-24	24-26 1/2	26 1/2-31	31-34	Ins.

Dress A	45**	1	1	1 1/4	1 1/4	1 1/4	Yds.
	60**	3/4	3/4	3/4	3/4	3/4	"

Interfacing 20" - 3/4 yd.

Panty B	45/60**	3/4	3/4	3/4	3/4	Yd.
---------	---------	-----	-----	-----	-----	-----

Headband C (one size): 45/60** - 3/4 yd.

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

Width, lower edge	XXS	XS	S	M	L	
Dress A	39	40	41	42	43	Ins.
Finished back length from base of neck						
Dress A	12 1/2	13 1/2	14 1/2	16	17 1/4	Ins.

*with nap **without nap

Facile

ROBE, CULOTTE ET BANDEAU DE TÊTE POUR BÉBÉS

Tissus Conseillés: Cotons, Gaze froissé, Toiles de lin, Rayonnes, Satin. **Bandeau de tête C** aussi en: Interlock, Jersey. **Entoilage A:** thermocollant léger.

Mercerie: **A:** 7 boutons de 1.3cm, 1 paquet de ruban de biais simple de 1.3cm, 1.4m de galon de dentelle de 1.3cm - 2cm. **B:** 1.3m d'élastique de 1.3cm. **C:** 21cm d'élastique de 2.5cm.

Tailles	TTP/XXS	TP/XS	P/S	M	G/L	
Âge	—	1-3	6	12	18	mois

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poids	XXS	XS	S	M	G/L	
	-3	3-6	6-8	8-9.5	9.5-11	kg
Hauteur	-43	43-61	61-67	67-79	79-87	cm

Robe A	115cm*	0.9	0.9	0.9	1.0	1.1	m
	150cm*	0.7	0.7	0.7	0.8	0.8	"

Entoilage 51cm - 0.6m

Culotte B	115/150cm*	0.3	0.3	0.3	0.5	0.5	m
-----------	------------	-----	-----	-----	-----	-----	---

Bandeau de tête C (une taille): 115/150cm* - 0.8m

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

Largeur à l'ourlet	XXS	XS	S	M	G/L	
Robe A	99	102	104	107	109	cm
Longueur finie – dos, votre nuque à l'ourlet						
Robe A	32	34	37	41	44	cm

*avec sens **sans sens



A



B



C



Simplicity® S9898


Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.




A



C



B



A




C




B

14 PIECES

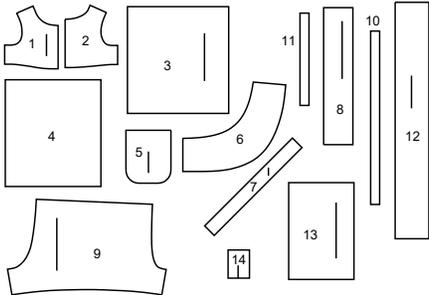

- 1 Bodice Front-A
- 2 Bodice Back-A
- 3 Skirt Front-A
- 4 Skirt Back-A
- 5 Pocket-A
- 6 Neck Ruffle-A
- 7 Neck Binding-A
- 8 Placket-A
- 9 Panties-B
- 10 Elastic Guide for Waist-B
- 11 Elastic Guide for Leg-B
- 12 Headband-C
- 13 Bow-C
- 14 Knot-C

Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

General Directions For Cutting

PRE-SHRINK and iron all fabric.

FOR DOUBLE THICKNESS -Fold fabric with **RIGHT** sides together. Pin pattern to **WRONG** side of fabric.

FOR SINGLE THICKNESS -Pin pattern to **RIGHT** side of fabric.


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends. Open out fabric to single thickness. Cut extending piece on **RIGHT** side of fabric in position shown.

✱ Mark small arrows along both selvages in dictating direction of nap or design. Fold fabric crosswise with **RIGHT** sides together, and cut along fold. Turn one fabric layer around so arrows on both layers go in the same direction. Place **RIGHT** sides together.


DRESS A

USE PIECES 1 2 3 4 5 6 7 8

45" (115CM)
WITH NAP
ALL SIZES

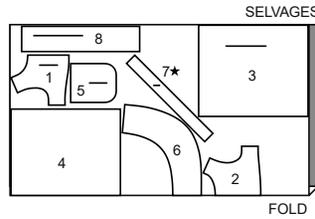


60" (150CM)
WITH NAP
ALL SIZES



INTERFACING

USE PIECE 8


20" (51CM)
ALL SIZES



PANTY B

USE PIECE 9


45" TO 60" (115CM TO 150CM)
WITH NAP
ALL SIZES



HEADBAND C

USE PIECES 12 13 14

45" TO 60" (115CM TO 150CM)
WITH NAP
ONE SIZE ONLY

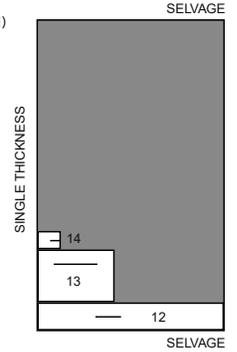

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials

Sewing Directions

FABRIC KEY



Read **General Directions** before you begin.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

BIAS ARMHOLE – see Armholes/Sleeves: “how to sew a bias tape armhole” video.

EASE/GATHER – see Gathering: “sewing two row gathers” video.

NARROW HEM – see Hems: “sewing narrow hems” video.

SLIP STITCH – see Hand Stitching: “how to slip stitch” video.

STAYSTITCH – see Machine Stitches: “how to do stay stitching” video.

STITCH IN THE DITCH – see Machine Stitches: “how to stitch in the ditch” video.

TRIM SEAM – see Seams: “how to trim, clip and layer seams” video.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH 5/8" (1.5CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.


DRESS A


INTERFACING

1. Pin interfacing to wrong side of **PLACKET (8)** sections. Fuse interfacing in place following manufacturer's directions.


BODICE

2. **STAYSTITCH** neck edge of **FRONT (1)** and **BACK (2)** 1/4" (6mm) from raw edge in the direction of the arrows.

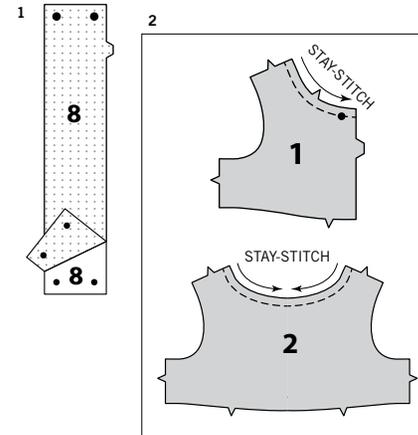


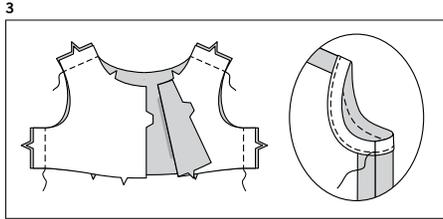


3. Stitch front to back at shoulder and side edges. To make **BIAS ARMHOLE(s)**, open out one folded edge of single bias tape. With raw edges even, pin tape to armhole edge, turning under one end and lapping at side seam. Stitch in a 3/8" (1cm) seam. Turn tape to inside and baste close to folded edge. On outside, stitch as basted.

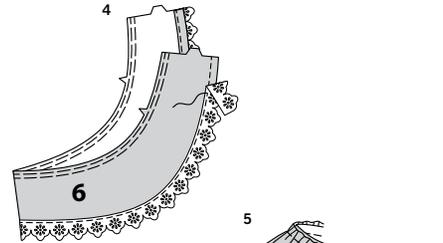


4. **GATHER** upper edge of **NECK RUFFLE (6)**. **NARROW HEM** lower edge. On outside, pin lace trim to lower edge of ruffle, placing straight edge of lace on hem stitching. Stitch close to straight edge of lace.

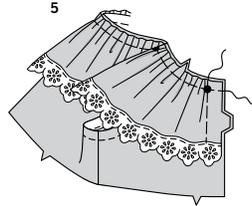


5. On outside, pin neck ruffle to neck and front edge of bodice, matching notches, placing small dot at shoulder seam, pulling up gathering stitches to fit. Baste 3/8" (1cm) from raw edge.

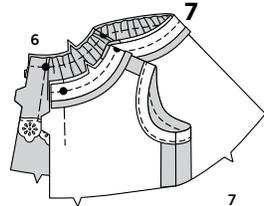

6. Press under a generous 1/4" (6mm) on unnotched edge of **NECK BINDING (7)**. Pin right side of neck binding to wrong side of bodice. Stitch in a 3/8" (1cm) seam, stretching the band to fit. **TRIM SEAM.**

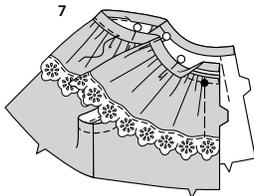


7. Turn pressed edge of binding to outside over seam, matching small dots; pin, placing pins on inside. On inside, **STITCH IN THE DITCH** of the seam, catching in pressed edge of binding on the outside.

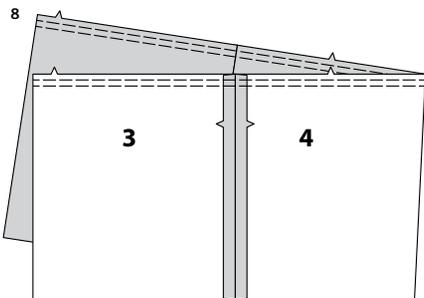


SKIRT

8. Stitch **SKIRT FRONT (3)** to **SKIRT BACK (4)** at side edges. **GATHER** upper edge.

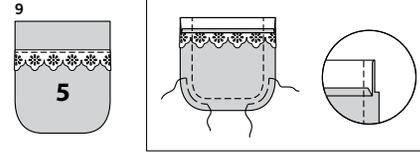


9. On outside, pin lace trim to **POCKET (5)**, placing straight edge of lace on placement line. Stitch close to straight edge of lace.


10. Press under 1/4" (6mm) on upper edge of pocket. Turn upper edge to outside along fold line, forming facing. Stitch along seamline on raw edges. To ease curved edge of pocket, stitch 1/4" (6mm) inside the seam line, using a long machine-stitch. Trim seam allowance in the facing area to 1/4" (6mm).




11. Turn corners right side out, turning facing to the wrong side; press, pressing under raw edges along stitching. Pull up ease stitches to shape the curve. To eliminate bulk, notch out the fullness in the seam allowance along the curves as far as the ease stitches. Stitch facing close to inner edge.

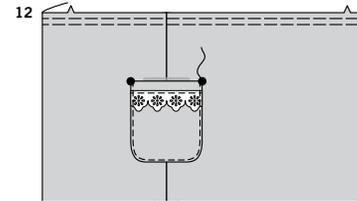


12. On outside, pin pocket to front along pocket line, matching large dots. Stitch close to side and lower edges.

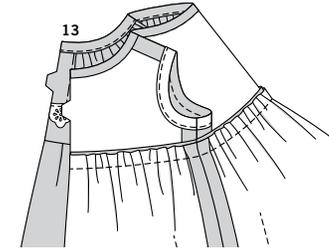

13. With right sides together and raw edges even, pin skirt to bodice, matching centers, seams and notches, pulling up gathering stitches to fit. Baste; Stitch. Press seam toward bodice, pressing out the skirt.




14. Press up hem. Press under 1/4" (6mm) on raw edge. Stitch close to inner pressed edge.

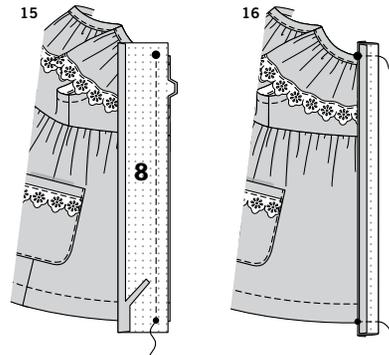

PLACKET

15. Press under 1/2" (1.3cm) on unnotched edge of **PLACKET (8)**. Trim to 1/4" (6mm). On outside, pin placket to dress, matching small dots, large dots, and notches. Stitch. Press seam toward placket, pressing placket out.

16. Turn upper and lower edges to outside along foldline with right sides together, matching small and large dots. Stitch across upper and lower edges of placket. **TRIM SEAM.**

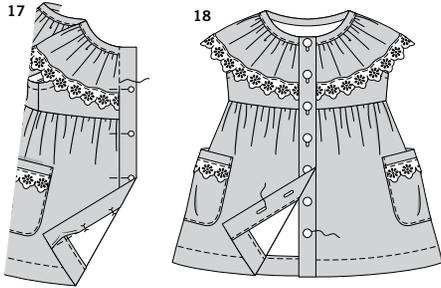


17. Turn free edge of placket to inside along foldline; press. On inside, pin pressed edge of placket over seam, placing pins on outside. On outside, **STITCH IN THE DITCH** of the seam, catching in placket facing on the inside.


FINISHING

18. Make buttonholes on right front at markings. Sew buttons to left front under buttonholes.


PANTY B

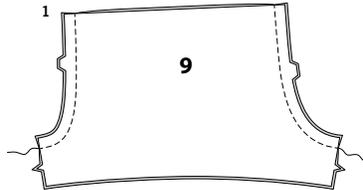


1. With **RIGHT** sides together, pin center front and back seams of PANTIES (9) sections. Stitch. To reinforce seam, stitch over first stitching. **TRIM SEAM.**

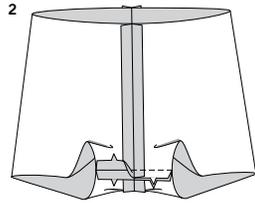

2. Stitch crotch seam.

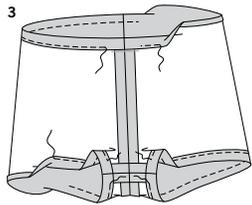


3. To form waistline and leg casings, press $7/8"$ (2.2cm) on upper and leg edges to inside. Press under $1/4"$ (6mm) on raw edges. Stitch close to inner edges of casings, leaving an opening on each casing to insert elastic.




4. Cut a piece of $1/2"$ (1.3cm) elastic the length of **ELASTIC GUIDE FOR WAIST** (10), and two pieces the length of **ELASTIC GUIDE FOR LEG** (11). Insert elastic through casings; adjust to fit. Stitch ends of elastic together securely. Stitch openings closed.


HEADBAND C

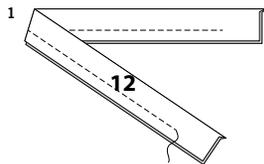


1. Fold **HEADBAND** (12) in half, lengthwise, with right sides together. Stitch long edge stopping $1-1/2"$ (3.8cm) from each end, as shown. **TRIM SEAM.**




2. Turn right side out; press. Open out ends and with right sides together, stitch ends. **TRIM SEAM.**



3. Press under $1/4"$ (6mm) seam allowance on opening edges. Cut a piece of $1"$ (2.5cm) elastic $8"$ (20.5cm) long. Insert elastic through opening, bringing ends to lap stitching lines $1/2"$ (1.3cm). Stitch ends of elastic securely with several rows of stitching over stitching lines.




4. **SLIP STITCH** opening closed.

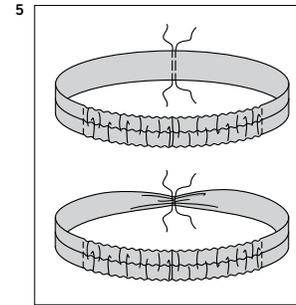


5. **GATHER** center of headband with a row of stitching $1/8"$ (3mm) each side of centerline. Pull up gathering stitches to $1/2"$ (1.3cm), and knot. Stitch over stitching to secure.

6. Fold **BOW** (13) in half, lengthwise, with right sides together. Stitch notched edge in a $3/8"$ (1cm) seam. **TRIM SEAM.**

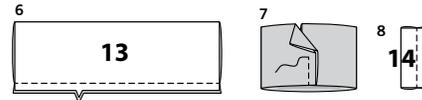


7. Turn bow right side out; press. Bring ends to underside, lapping $3/8"$ (1cm) at center. Stitch along center line.

8. Fold **KNOT** (14) in half, lengthwise, with right sides together. Stitch notched edge in $3/8"$ (1cm) seam.

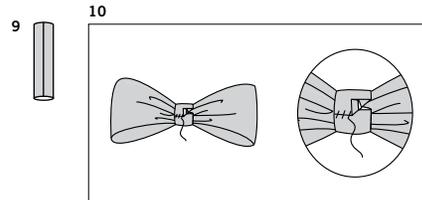

9. Turn knot right side out, bringing seam to center on underside; press.

10. Crush bow at center and place knot around center of bow, turning under and lapping one end on underside. **SLIP STITCH** ends securely, catching in underside of bow.

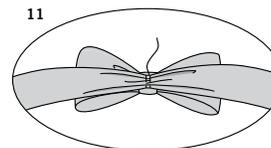

11. Tack center of bow to headband at small dot.



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.