

S9903

Simplicity[®]

Clothes Fit Dolls/Vêtements Pour Poupées de: 15in/38cm



Andrea Schewe

Designed and printed in USA.

Shop all the pattern brands you love @

Simplicity.com

Use the 1 inch (2.54cm) box to ensure you are using rule at 100%

Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.

PICK-A-KNIT[®] RULE

FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE
POUR CE PATRON - LE JERSEY DOIT S'ETIRER DANS LA LARGEUR DE 4" (10 cm) DEPHIS ICI
PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO ANCHO POR 4" (10 cm) DESDE AQUI



TO HERE 50%
JUSQUE LA 50%
HASTA ALLA 50%



When using the Pick-A-Knit[®] rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.
Quand vous utilisez la règle Pick-A-Knit[®] pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.
Al utilizar la regla Pick-A-Knit[®] para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

Average

15" (38CM) DOLL CLOTHES AND ACCESSORIES

Suggested Fabrics: A,B,C,D,H,I in Stretch Knits only such as: Interlock, Jersey, Single Knits. See Pick-A-Knit[®] Rule. E,F,G in Broadcloth, Cotton Types, Quilting Cottons. E,F also in Gingham. G also in Denim. **Lining F:** Cotton Types. **Interfacing G:** Fleece Fabric.

Notions: A,B: 5½" (14cm) length of ¾" (1cm) hook and loop tape, ½ yd. (0.5m) of ¼" (6mm) elastic. D: ¾ yd. (0.4m) of ¼" (6mm) elastic. E,F,G,H,I: ¾" (2cm) hook and loop tape: ¾" (2cm) length for E, 3" (8cm) length for F and I, 10" (25cm) length for G, 2" (5cm) length for H, 6" (15cm) length for I. **Also for G:** One 9" (23cm) separating zipper (cut to fit), four 1" (2.5cm) rectangular D-Rings.

Bodysuit A

60"* - ¾ yd. (150cm* - 0.3m)

Bodysuit B

60"* - ¾ yd. (150cm* - 0.3m)

Hat C

13" x 20" (33cm x 51cm) remnant

Leggings D

11" x 20" (28cm x 51cm) remnant

Bib E

7" x 7" (18cm x 18cm) remnant

Diaper F and Lining

9" x 10" (23cm x 25cm) remnants each

Carrier G

45"* - ¾ yd. (115cm* - 0.5m)

Interfacing: 60" - ¾ yd. (150cm* - 0.3m)

Sleep Sack H

60"* - ¾ yd. (150cm* - 0.6m)

Swaddle I

60"* - ¾ yd. (150cm* - 0.6m)


*with nap **without nap



A



B




C



D



E




F



G



H



I


Simplicity[®]
by design

Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.


To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.

Simplicity® S9903

Thank you for purchasing this Simplicity pattern.
We made every effort to provide you with a high quality product.

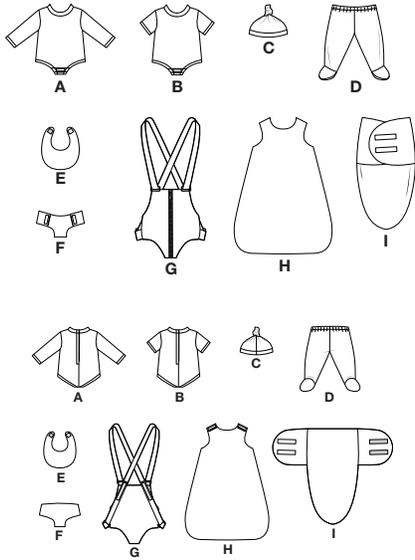

25 PIECES

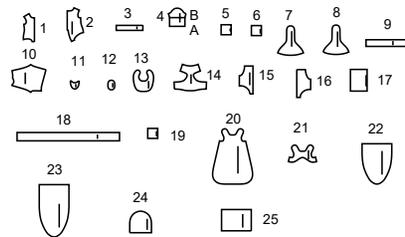

- | | |
|-------------------------------|----------------------|
| 1 FRONT - A,B | 14 DIAPER - F |
| 2 BACK - A,B | 15 FRONT - G |
| 3 NECK BAND - A,B | 16 BACK - G |
| 4 SLEEVE - A,B | 17 LOOPS - G |
| 5 FRONT CROTCH FACING - A,B | 18 STRAP - G |
| 6 BACK CROTCH EXTENSION - A,B | 19 BINDING - G |
| 7 HAT FRONT - C | 20 SLEEP SACK - H |
| 8 HAT BACK - C | 21 FACING - H |
| 9 HAT BAND - C | 22 SWADDLE FRONT - I |
| 10 FRONT AND BACK - D | 23 SWADDLE BACK - I |
| 11 TOE - D | 24 FLAP - I |
| 12 SOLE - D | 25 FACING - I |
| 13 BIB - E | |

Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

General Directions For Cutting

PRE-SHRINK and iron all fabric.

FOR DOUBLE THICKNESS -Fold fabric with RIGHT sides together. Pin pattern to WRONG side of fabric.

FOR SINGLE THICKNESS -Pin pattern to RIGHT side of fabric.

★ If layout shows a piece extending past fold, cut out all pieces except piece that extends. Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.


✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold. Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together.

A,B,C, D,H,I- SIZED FOR STRETCH KNITS ONLY

BODYSUIT A

USE PIECES 1 2 3 4 5 6


60" (150CM)
WITH NAP



BODYSUIT B

USE PIECES 1 2 3 4 5 6

60" (150CM)
WITH NAP



HAT C

CUT ONE OF EACH PIECES 7 8 9 FROM REMNANT

LEGGINGS D

CUT TWO OF EACH PIECES 10 11 12 FROM REMNANT

BIB E

CUT TWO OF PIECE 13 FROM REMNANT


DIAPER F AND LINING

CUT ONE OF PIECE 14 FROM FABRIC REMNANT
CUT ONE OF PIECE 14 FROM LINING REMNANT

CARRIER G

USE PIECES 15 16 17 18 19


45" (115CM)
WITH NAP

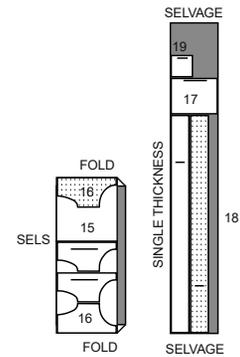

INTERFACING

USE PIECES 15 16


60" (150CM)
WITH NAP



SLEEP SACK H

USE PIECES 20 21


60" (150CM)
WITH NAP



SWADDLE I

USE PIECES 22 23 24 25

60" (150CM)
WITH NAP

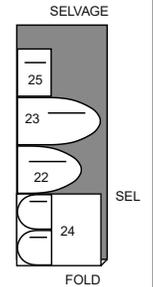

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials

Sewing Directions

FABRIC KEY RIGHT SIDE WRONG SIDE INTERFACING LINING LINING

Read **General Directions** before you begin.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

DART - see **Darts**: "sewing flat dart" video

EDGESTITCH - see **Machine Stitches**: "how to edgestitch" video.

FINISH - see **Seams**: "how to finish seam allowances" video.

SLIPSTITCH - Slide needle through a folded edge, then pick up a thread of underneath fabric.


All seams are 1/4" (6mm).


BODYSUIT A, B

FRONT AND BACK


1. With RIGHT sides together, stitch front (1) to back (2) sections at shoulders.

2. With WRONG sides together, fold neck band (3) in half lengthwise, having raw edges even; pin.

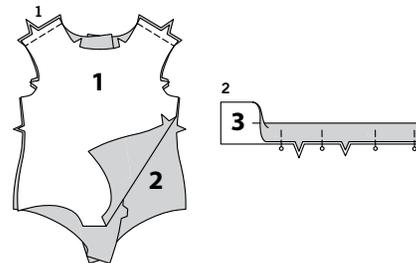

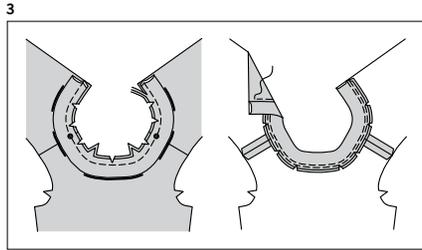


3. On OUTSIDE, pin band to neck edge, matching notches, placing small dots at shoulder seams. Stitch, stretching band to fit. Trim seam; clip curves. Press seam down, pressing band out. **EDGESTITCH** neck edge.

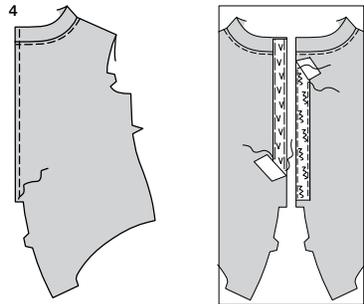

4. **FINISH** upper unnotched center back edges, as shown.

5. Cut a piece of 3/8" (1cm) wide hook and loop tape 5 1/2" (14cm) long. Separate tape. On OUTSIDE, center loop (soft) section of tape along right center back extension opening edge, as shown. Stitch close to outer edges of tape. On OUTSIDE, center hook (hard) section of tape along left center back extension opening edge, as shown. Baste close to outer edges of tape.

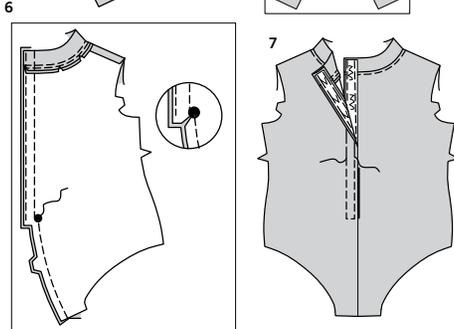

6. Pin center back sections together at center back seam, matching large dots and notches. Stitch, ending stitching at large dot. Clip right back edge below extension, as shown.

7. Turn left back extension to INSIDE along center back. Baste close to outer edges of tape.


On OUTSIDE, top-stitch as basted.

SLEEVE AND FINISHING

8. Press under 1/4" (6mm) hem allowance on lower edge of sleeve (4). To form narrow hem, tuck under raw edge to meet crease. Press. Stitch hem in place.

9. With RIGHT sides together, pin sleeve to armhole edge with small dot at shoulder, matching notches. Stitch. Stitch again 1/8" (3mm) from first stitching. Press seam toward sleeve.

10. Stitch front to back at side and underarm in one continuous seam, matching armhole seams. Turn under and sew seam allowance diagonally at lower edge of sleeve.

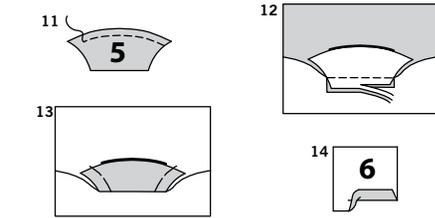


11. **FINISH** upper edge of front crotch facing (5), as shown.

12. With RIGHT sides together, pin front crotch facing to lower edge of front, having raw edges even. Stitch lower edge. Trim.


13. Turn facing to inside. Press. Baste raw edges.

14. Press under seam allowance on lower edge of back crotch extension.

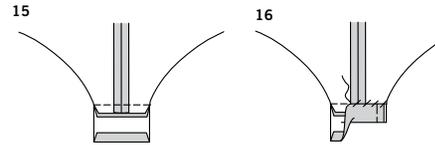


15. With RIGHT sides together, pin back crotch extension to lower edge of back. Stitch. Press seam toward extension.

16. Turn extension to INSIDE along foldline. Press. **SLIPSTITCH** pressed edge over seam. Baste raw edges.

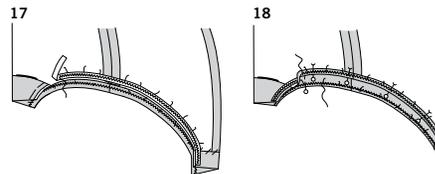

17. Cut two pieces of 1/4" (6mm) wide elastic 6 1/2" (17cm) long. On INSIDE, pin elastic to leg edge with edges even. Stitch, using a zig-zag stitch or overlock stitch, stretching slightly as you sew.

18. Turn elastic to the INSIDE; press. Pin, placing pins on OUTSIDE. On OUTSIDE, stitch 1/4" (6mm) from finished edge.

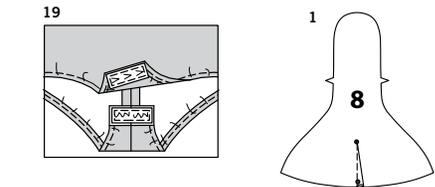

19. Cut a piece of 3/8" (1cm) wide hook and loop tape 1" (2.5cm) long. Separate tape. On OUTSIDE, center loop (soft) section of tape along back crotch extension opening edge, as shown. Stitch close to outer edges of tape. On INSIDE, center hook (hard) section of tape along front opening edge, as shown. Stitch close to outer edges of tape.

HAT C

FRONT AND BACK


1. Stitch **DART** in hat back (8). Press dart toward one side.

2. With RIGHT sides together, pin hat front (7) to hat back, having raw edges even, matching notches. Stitch side and upper edges, as shown. Trim seam; clip curves.



3. Turn RIGHT side out. Press.

4. Stitch ends of hat band (9) together at center back seam.

5. With WRONG sides together, fold hat band in half lengthwise, having raw edges even; pin.

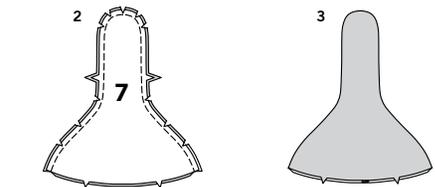


6. On OUTSIDE, pin band to lower edge of hat, matching centers and notches, placing small dots at seams. Stitch, stretching band to fit. Press seam up, pressing band down. Knot end as shown on envelope.

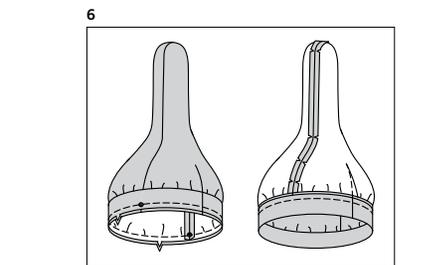


LEGGINGS D

FRONT AND BACK

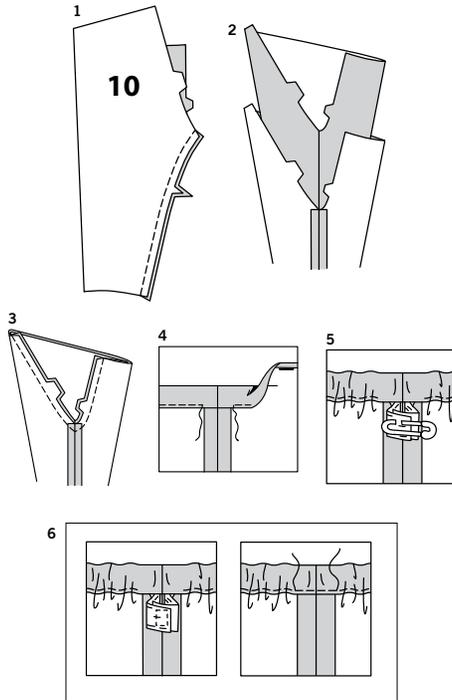


1. Stitch each front and back (10) section together at inner leg seams.
2. With RIGHT sides together, insert one leg INSIDE the other.
3. With RIGHT sides together, pin center seam, matching inner leg seams and notches. Stitch.
4. Turn upper edge of leggings to INSIDE along foldline, forming casing. Press. Turn under 1/4" (6mm) on raw edge; press. Stitch close to inner pressed edge, leaving an opening near center back.
5. Cut a piece of 3/8" (1cm) wide elastic 11 3/4" (30cm) long. Insert elastic through opening in casing. Overlap ends and hold with a safety pin.
6. Stitch ends of elastic together securely. Stitch opening, stretching elastic while stitching. Distribute fullness evenly.

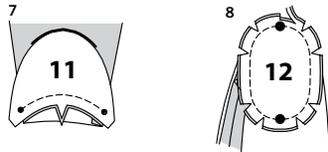

7. With RIGHT sides together, pin toe (11) to lower front edge of leggings, matching notches and small dots.
8. With RIGHT sides together, pin sole (12) to lower edge of leggings, matching large dots. Stitch. Trim seam; clip curves.

BIB E

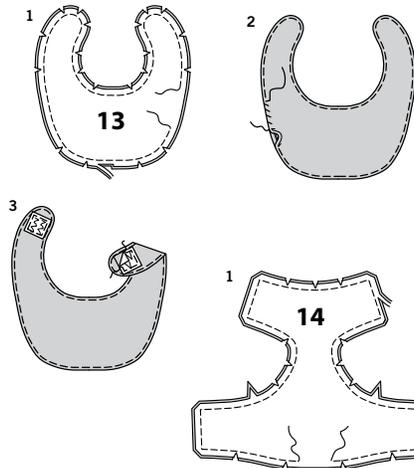


1. With RIGHT sides together, pin bib (13) sections together, having raw edges even. Stitch, leaving opening for turning. Trim seam; clip curves.
2. Turn RIGHT side out. Press. SLIPSTITCH opening. EDGESTITCH outer edge.
3. Cut a piece of 3/4" (2cm) wide hook and loop tape 3/4" (2cm) long. Separate tape. On OUTSIDE, center loop (soft) section of tape within RIGHT back placement lines, as shown. Stitch close to outer edges of tape. On INSIDE, center hook (hard) of tape within LEFT back placement lines, as shown. Stitch close to outer edges of tape.

DIAPER F

FRONT AND BACK

1. With RIGHT sides together, pin diaper (14) sections together, having raw edges even. Stitch, leaving opening for turning. Trim seam; clip curves.

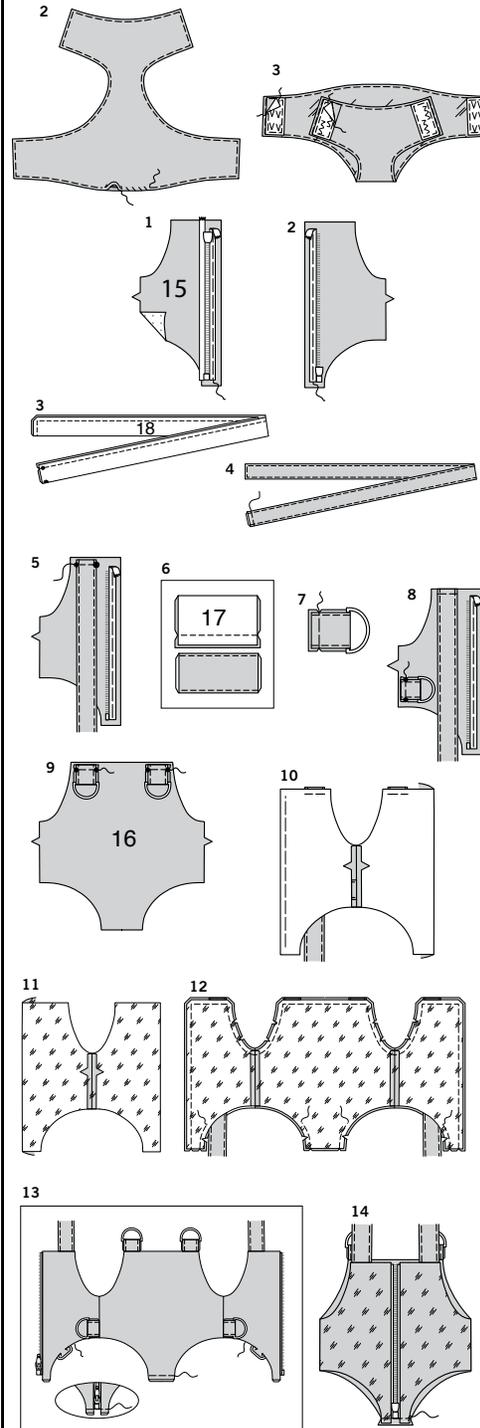

2. Turn RIGHT side out. Press. SLIPSTITCH opening. EDGESTITCH outer edges.
3. Cut two pieces of 3/4" (2cm) wide hook and loop tape 1 1/2" (3.8cm) long. Separate tape. On OUTSIDE, center loop (soft) sections of tape within front placement lines, as shown. Stitch close to outer edges of tape. On INSIDE, center hook (hard) of tape within back placement lines, as shown. Stitch close to outer edges of tape.



CARRIER G

FRONT AND BACK

1. Apply INTERFACING to front (15). On OUTSIDE, pin closed zipper to one RIGHT front section, having zipper face down and about 1/4" (6mm) from front edge, and top stop 3/8" (1cm) from upper edge. Taper upper end of zipper tape at top stop, as shown. Hand-baste in place.
2. Separate zipper. Place remaining half of zipper on one LEFT front section, having zipper face down and about 1/4" (6mm) from front edge, and top stop 3/8" (1cm) from upper edge. Taper upper end of zipper tape at top stop, as shown. Make sure that both sides of zipper are aligned. Hand-baste in place. **NOTE:** Remaining front sections will be used as lining.
3. With RIGHT sides together, fold strap (18) along foldline. Stitch, leaving end with dots open. Trim seam. Trim corner.
4. Turn RIGHT side out. Press. Baste raw edges. EDGESTITCH finished edges.
5. Pin one strap to each front section, matching small and large dots, having raw edges even. Baste.
6. With RIGHT sides together, fold loops (17) along foldline. Stitch leaving ends open, as shown. Turn. Press. EDGESTITCH finished edges.
7. Insert each loop through one D-Ring, folding loop in half, having raw edges even. Baste raw edges.
8. Pin one loop to each side edge of front, having raw edges even, matching small dots. Baste. **NOTE:** Remaining loops will be used later.
9. Apply INTERFACING to back (16). Pin remaining loops to upper edge of back, having raw edges even, matching small dots. Baste. **NOTE:** Remaining back section will be used as lining.
10. Stitch fronts to back at sides. Press.



FINISHING

11. Stitch front (lining) sections to back (lining) at sides.
12. With RIGHT sides together, pin lining to front and back. Stitch front, upper and underarm edges. Stitch lower curved edges ending stitching 3" (7.5cm) from each side edge, as shown, being careful not to catch straps in stitching. Trim seams; clip curves.
13. Turn RIGHT side out, pulling fronts through one opening. Press, pressing in remainder of seam allowances on lower edges, as shown. SLIPSTITCH openings. Close zipper. Baste lower edges.
14. With RIGHT sides together, pin front to back at lower edge. Baste.

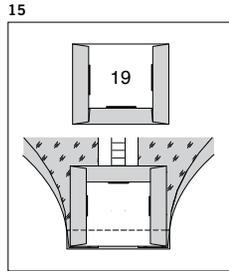



15. Press under seam allowances on lower and side edges of binding (19). Pin binding to seam allowances at lower edge, as shown, having raw edges even, placing seamline along basting. Stitch.

16. Turn binding over seam. Press. **SLIPSTITCH** pressed edge over seam and side edges together.

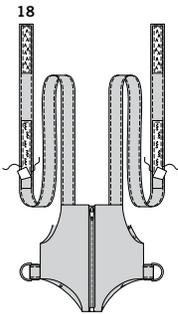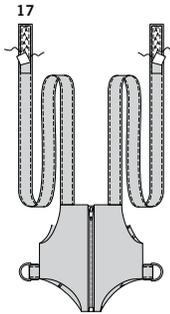

17. Cut two pieces of 3/4" (2cm) wide hook and loop tape 5" (13cm) long. Separate tape. Trim hook (hard) tape to 3-1/2" (9cm) long. Do not trim loop (soft) sections. On **OUTSIDE**, center hook (hard) of tape within placement lines, on each strap, as shown. Stitch close to outer edges of tape.



18. On **OUTSIDE**, center 5" (13cm) long loop (soft) of tape within placement lines, on each strap, as shown. Stitch close to outer edges of tape.



SLEEP SACK H FRONT AND BACK



1. With **RIGHT** sides together, pin sleep sack (20) sections together, matching notches. Stitch side and lower edges. Trim seam; clip curves.

2. Turn **RIGHT** side out. Press.





3. Stitch facing (21) sections together at side edges. **FINISH** lower edge.

4. With **RIGHT** sides together, pin facing to sleep sack, matching centers and notches. Stitch upper and underarm edges. Trim seam; clip curves.

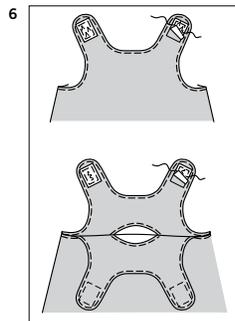

5. Turn facing to **INSIDE**. Press. **EDGESTITCH** upper and underarm edges.


6. Cut two pieces of 3/4" (2cm) wide hook and loop tape 1" (2.5cm) long. Separate tape. On **OUTSIDE**, center loop (soft) section of tape within front placement lines, as shown. Stitch close to outer edges of tape. On **INSIDE**, center hook (hard) of tape within back placement lines, as shown. Stitch close to outer edges of tape.





SWADDLE I FRONT AND BACK

1. For each side, pin two flap (24) sections together, having raw edges even. Stitch outer curved edge. Trim seam; clip curves.

2. Turn **RIGHT** side out. Press. Baste raw edges.


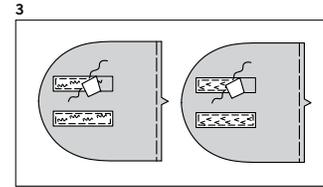


3. Cut two pieces of 3/4" (2cm) wide hook and loop tape 3" (7.5cm) long. Separate tape. On **OUTSIDE**, center loop (soft) section of tape within placement lines on **RIGHT** flap section, as shown. Stitch close to outer edges of tape. On **INSIDE**, center hook (hard) section of tape within placement lines on **LEFT** flap section, as shown. Stitch close to outer edges of tape.

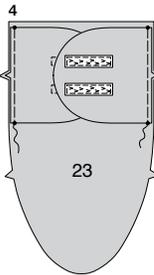



4. With **RIGHT** sides together, pin flaps to side edges of swaddle back (23), matching small dots and notches, having raw edges even. Baste.

5. **FINISH** lower edge of facing (25).

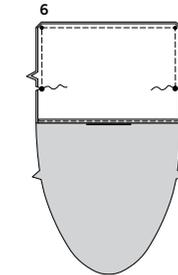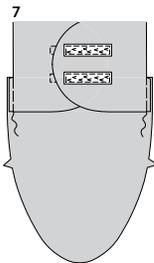


6. With **RIGHT** sides together, pin facing to swaddle back, matching notches and small and large dots. Stitch side and upper edges between large dots, as shown. Clip to large dots. Trim seam.

7. Turn facing to **INSIDE**. Press. Baste raw edges.

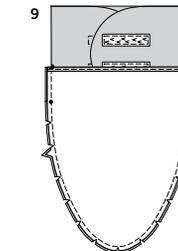

8. Press under 1/2" (6mm) hem allowance on upper edge of swaddle front (22). To form narrow hem, tuck under raw edge to meet crease. Press. Stitch hem in place.

9. With **RIGHT** sides together, pin swaddle front to swaddle back, matching small and large dots and notches. Stitch. Trim seam; clip curves.

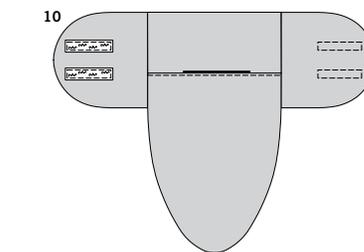

10. Turn **RIGHT** side out. Press.



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.