

S9908

Simplicity[®]



Shop all the pattern brands you love @

Simplicity[®].com

Very Easy

BAG IN FOUR SIZES

Suggested Fabrics: Cotton/Cotton Blends, Ripstop.

Notions: **A,B,C,D:** 1" (2.5cm) webbing: 1 yd. (1.0m) for **A,B,C**, 2¼ yds. (2.1m) for **D**. Also for **D:** One 18" (46cm) zipper, two 1" (2.5cm) square rings, two 1" (2.5cm) slides.

Bag A - Expanded Size - 13" H x 18" W (33cm x 46cm), Folded Size - 3½" W x 26" L (9cm x 66cm)

45"* - 1¼ yd. (115cm* - 1.1m)

Bag B - Expanded Size - 9" H x 14" W (23cm x 36cm), Folded Size - 3½" W x 20" L (9cm x 51cm)

45"* - 1¼ yd. (115cm* - 1.0m)

Bag C - Expanded Size - 10" H x 16" W (25cm x 41cm), Folded Size - 3½" W x 20" L (9cm x 51cm)

45"* - 1 yd. (115cm* - 0.9m)

Bag D - Expanded Size - 9" H x 13" W (23cm x 33cm), Folded Size - 3½" x 18½" (9cm x 47cm)

45"* - 1 yd. (115cm* - 0.9m)

*with nap **without nap



A



B





C




D

Simplicity® S9908

Thank you for purchasing this Simplicity pattern.
We made every effort to provide you with a high quality product.




7 PIECES

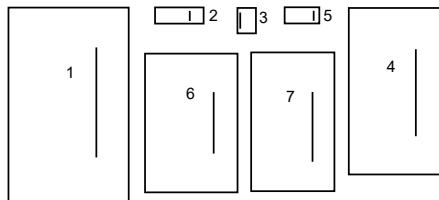

- 1 BAG - A
- 2 STRAP BAND - A
- 3 BAG END - A,B,C,D
- 4 BAG - B
- 5 STRAP BAND - B,C
- 6 BAG - C
- 7 BAG - D

Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY
SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

General Directions For Cutting

PRE-SHRINK and iron all fabric.

FOR DOUBLE THICKNESS -Fold fabric with **RIGHT** sides together.
Pin pattern to **WRONG** side of fabric.

FOR SINGLE THICKNESS -Pin pattern to **RIGHT** side of fabric.


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends. Open out fabric to single thickness. Cut extending piece on **RIGHT** side of fabric in position shown.

✱ Mark small arrows along both selvages in dicing direction of nap or design. Fold fabric crosswise with **RIGHT** sides together, and cut along fold. Turn one fabric layer around so arrows on both layers go in the same direction. Place **RIGHT** sides together.

BAG A

USE PIECES 1 2 3


45" (115CM)
WITH NAP
ALL SIZES

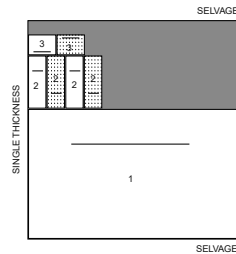

BAG B

USE PIECES 3 4 5


45" (115CM)
WITH NAP
ALL SIZES



BAG C

USE PIECES 3 5 6


45" (115CM)
WITH NAP
ALL SIZES



BAG D

USE PIECES 3 7





45" (115CM)
WITH NAP
ALL SIZES



SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at
simplicity.com/sewingtutorials

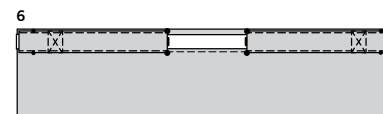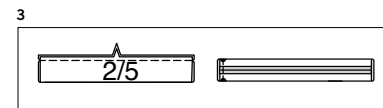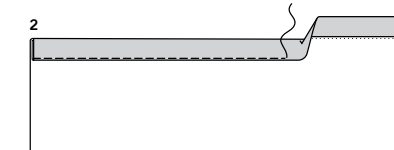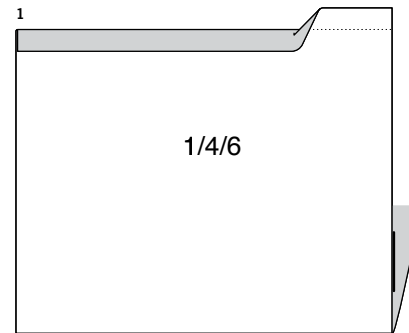

Sewing Directions

FABRIC

KEY RIGHT SIDE WRONG SIDE INTERFACING LINING LINING

Read **General Directions** on page 1 before you begin.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

EDGE-STITCH - see Machine Stitches: "how to edgestitch" video.


PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.


BAG A, B, C

NOTE: To form opening edges and pleats, beginning on one long edge, working toward area marked **BOTTOM** on the pattern, and then on opposite long edge, working area marked **BOTTOM**.


1. Form opening edges on bag (1, 4, or 6), as follows:
On each end, turn long edge of bag to **INSIDE** side along outermost foldline, having **WRONG** sides together; press.
2. Turn long edge of bag to **INSIDE** again along next foldline; press.
Stitch close to inner pressed edge.
3. Fold strap band (2 or 5) sections in half, lengthwise, **RIGHT** sides together.
Stitch long edges, leaving ends open.
Fold strap along foldlines, bringing seam to center.
Stitch end with large dots in a 1/4" (6mm) seamline.
4. Turn strap band **RIGHT** side out; press, pressing along fold lines.
5. For handles, cut two pieces of 1" (2.5cm) webbing the length of bag.
With **RIGHT** sides facing up towards you, center webbing over opening edge between foldlines, having raw edges even.
Baste across raw edges.
6. With **RIGHT** sides facing up towards you, pin one strap band to each opening edge (over ends of webbing), matching small and large dots.
EDGE-STITCH long edges of strap, being careful not to catch in handle.
Stitch along broken side lines of box and then along diagonal stitching lines between corners, forming an "X".
This will now be referred to as the top of the bag.

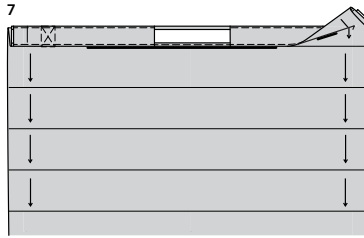

7. Make pleats on each side of bottom, as follows:
On **OUTSIDE**, fold top of bag along innermost foldline, bringing fold to adjacent solid line in direction of arrows, as shown, forming pleat. Press.
Continue making accordion-style pleats in same manner, pressing after each pleat, and ending at nearest solid line on bottom.
If you prefer, you can baste edges together after each pleat is formed.

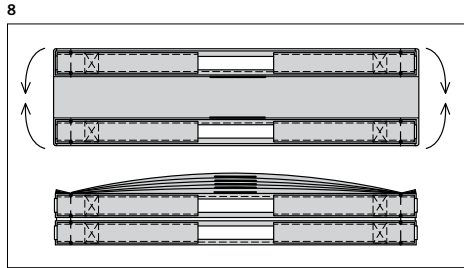

8. When you finish making the pleats, you will be on the **RIGHT** of the bag.
On **OUTSIDE**, turn both sets of pleats to **WRONG** side, toward each other, as shown.
Bring opening edges together so that they meet in the center.
Baste across raw edges.




9. Press in each end of bag end (3) along broken lines.

10. Fold bag end in half along center foldline, setting in a crease.

11. Open out long edges of bag end and turn them to **WRONG** side so that they meet in the crease. Press.

12. Slip raw edges of bag between folds of each bag end, placing inner pressed edges of bag along inner crease.
EDGESTITCH inner long edges of bag end through all thicknesses, catching in **UNDERSIDE** of bag end.

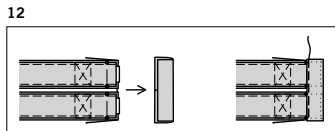









BAG D

NOTE: To form opening edges and pleats, beginning on one long edge, working toward area marked **BOTTOM** on the pattern, and then on opposite long edge, working area marked **BOTTOM**.



1. Form opening edges on bag (7), as follows:
On each end, turn long edge of bag to **INSIDE** side along outermost foldline, having **WRONG** sides together; press.

2. Turn long edge of bag to **INSIDE** again along next foldline; press.
Stitch 1/4" (6mm) from inner pressed edge.



3. It may be necessary to adjust the length of your zipper.
Measure bag opening between seam lines.
Close zipper and measure from top stop down along teeth to length needed. Mark new length.

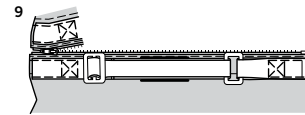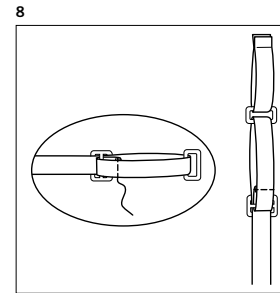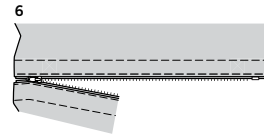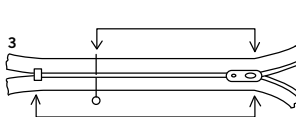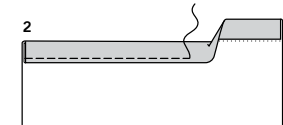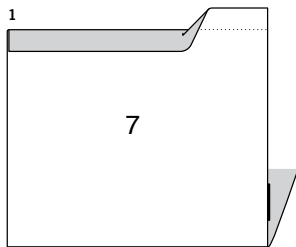

10

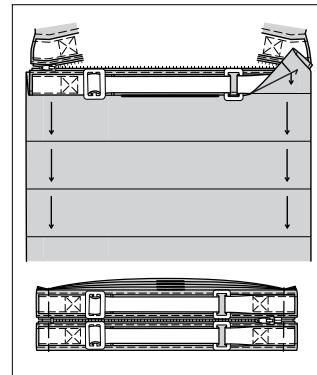

13



4. With matching buttonhole twist or heavy-duty thread, make several overcast stitches across zipper teeth just below marking. Trim away lower end of zipper tape to within 5/8" (1.5cm) of overcast stitches.

5. On **OUTSIDE**, lap opening edge of bag over **RIGHT** half of zipper, having top stop just below seamline and fold edge a scant 1/8" (3mm) away from inner edge of zipper teeth.
Hand-baste zipper in place close to inner edge of bag, making sure that you can open and close zipper.
Stitch as basted, using an adjustable zipper foot.

6. Stitch remaining half of zipper to **LEFT** opening edge in same manner, making sure that ends of bag are even.

7. Make two straps, as follow:
Cut one piece of 1" (2.5cm) webbing 9" (23cm) long.
Insert webbing through one end of ring; bring ends together to form loop, as shown.
Machine baste across ends.

8. Cut one piece of webbing 28-3/4" (73cm) long.
Insert one end of webbing through center bar of slide, turning back 3" (7.5cm), then 1-1/4" (3.2cm) on inner raw edge. Stitch in place close to inner turned edge. If you prefer, stitch again about 3/4" (12mm) away for added strength.
Insert free edge of webbing through remaining free end of ring on end of loop, then up and over center bar of slide, as shown.

9. Open zipper.
With **RIGHT** sides up, center one strap over each opening edge, having outer edges along placement lines and raw edges even; adjust length of strap to fit bag so that it will be easier to stitch. Stitch straps along stitching lines, squaring stitches at vertical stitching lines, keeping straps free between ring and slide. Stitch straps along remaining stitching lines between corners, forming an "X".

10. Make pleats on each side of bottom, as follows:
On **OUTSIDE**, fold top of bag along innermost foldline, bringing fold to adjacent solid line in direction of arrows, forming pleat. Press.
Continue making accordion-style pleats in same manner, pressing after each pleat, and ending on **TOPSIDE**.
If you prefer, you can baste edges together after each pleat is formed.

11. Press in each end of bag end (3) along broken lines.
Fold bag end in half along center foldline, setting in a crease.

12. Open out long edges of bag end and turn them to **WRONG** side so that they meet in the crease. Press.

13. Slip raw edges of bag between folds of each bag end, placing inner pressed edges of bag along inner crease.

14. **EDGESTITCH** inner long edges of bag end through all thicknesses, catching in **UNDERSIDE** of bag end.



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2023 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.