

S9924

Simplicity



A



B



C

Designed and printed in USA.



Average

MISSES' CARGO SKIRTS

Suggested Fabrics: Broadcloth, Chambray, Chino, Cotton Blends, Denim, Gabardine, Linen Blends, Stretch Wovens, Twill. **Lining:** Cotton Blends. **Interfacing:** Lightweight Fusible.

Notions: A,B,C: One 5" (13cm) zipper (cut to fit), ¼" (1.5cm) button(s): One for A,B, Five for C. **Also for A:** One 4" (10cm) zipper, one ¾" (2cm) D-Ring, ¾ yd. (0.4m) of ¾" (2cm) twill tape. **Also for B:** Four 1" (2.5cm) D-Rings.

Sizes	6	8	10	12	14	16	18	20	22	24
European	32	34	36	38	40	42	44	46	48	50

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	30½	31½	32½	34	36	38	40	42	44	46	Ins.
Waist	23	24	25	26½	28	30	32	34	37	39	"
Hip-9" below waist	32½	33½	34½	36	38	40	42	44	46	48	"
Back-neck to waist	15½	15¾	16	16¼	16½	16¾	17	17¼	17½	17¾	"

Lining A,B,C - 45* - ¾ yd. Interfacing A,B,C - 20" - ¾ yd.**

Skirt A	45**	1¼	1¼	1¼	1¼	1¼	1¼	1¼	1¼	1¼	1¼	Yds.
	60**	1½	1½	1½	1½	1½	1½	1½	1½	1½	1½	"
Skirt B	45**	1¾	1¾	1¾	1¾	1¾	2¼	2¼	2¼	2¼	2¼	Yds.
	60**	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	"
Skirt C	45**	1¾	1¾	1¾	1¾	2	2	2	2¼	2¼	2¼	Yds.
	60**	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	1¾	"

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B,C Hip	35½	36½	37½	39	41	43	45	47	49	51	Ins.
Width, lower edge											
Skirt A,B,C	41½	42½	43½	45	47	49	51	53	55	57	Ins.
Finished back length from waist											
Skirt A,B,C (sits 1" below waist)	18	18	18	18	18	18	18	18	18	18	Ins.

*with nap **without nap

Average

JUPES CARGO POUR JEUNES FEMMES

Tissus Conseillés: Broadcloth, Chambray, Chino, Cotonnades, Denim, Gabardine, Lin mélangés, Tissus tissés extensibles, Twill. **Doublure:** Cotonnades. **Entoilage:** Thermocollant léger.

Mercurie: A,B,C: 1 fermeture à glissière de 13cm (coupée pour ajuster), bouton(s) de 1.5cm: 1 pour A,B, 5 pour C. **Aussi pour A:** 1 fermeture à glissière de 10cm, 1 anneau D de 2cm, 0.4m de talonnette de coton de 2cm. **Aussi pour B:** 4 anneaux D de 2.5cm.

Tailles	6	8	10	12	14	16	18	20	22	24
Françaises	34	36	38	40	42	44	46	48	50	52
Européen	32	34	36	38	40	42	44	46	48	50

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	78	80	83	87	92	97	102	107	112	117	cm
Taille	58	61	64	67	71	76	81	87	94	99	"
Hanches (23cm au-dessous de la taille)											
	83	85	88	92	97	102	107	112	117	122	cm

Dos du cou à la taille 39.5 40 40.5 41.5 42 42.5 43 44 44 44.5 "

Doublure A,B,C - 115cm - 0.3m Entoilage A,B,C - 51cm - 0.7m**

Jupe A	115cm*	1.4	1.4	1.4	1.4	1.5	1.5	1.7	1.7	1.7	1.7	1.7	m
	150cm*	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	"
Jupe B	115cm*	1.6	1.6	1.6	1.6	1.7	1.8	1.8	1.8	1.9	1.9	1.9	m
	150cm*	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	"
Jupe C	115cm*	1.6	1.6	1.6	1.6	1.8	1.8	1.8	1.8	1.8	1.9	1.9	m
	150cm*	1.4	1.4	1.4	1.4	1.4	1.5	1.5	1.5	1.5	1.5	1.5	"

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B,C Hanches	90	93	95	99	104	109	114	119	124	130	cm
Largeur à l'ourlet											
Jupe A,B,C	105	108	110	114	119	124	130	135	140	145	cm
Longueur finie - dos, taille à l'ourlet											
Jupe A,B,C (repose à 2.5cm au-dessous de la taille)	46	46	46	46	46	46	46	46	46	46	cm

*avec sens **sans sens



A



B




C



A,B,C

Simplicity® S9924

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.



A

B



C



A



B




C




A,B,C

27 PIECES

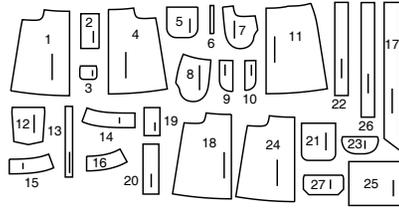

- 1 Right Front-A
- 2 Right Pocket-A
- 3 Flap-A
- 4 Left Front-A
- 5 Left Pocket-A
- 6 Guide for Trim-A
- 7 Pocket Facing-A,B,C
- 8 Side Front and Pocket-A,B,C
- 9 Left Fly Facing-A,B,C
- 10 Right Fly-A,B,C
- 11 Back-A,B,C
- 12 Back Pocket-A,B
- 13 Carrier-A,B,C
- 14 Right Waistband-A,B,C
- 15 Left Waistband-A,B,C
- 16 Back Waistband-A,B,C
- 17 Belt-A,B,C
- 18 Front-B
- 19 Upper Strap-B
- 20 Lower Strap-B
- 21 Gusset-B
- 22 Flap-B
- 23 Front-C
- 24 Lower Pocket-C
- 25 Gusset-C
- 26 Flap-C
- 27 Flap-C

Cutting Layouts



POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

LINING A,B,C

USE PIECE 7


45" (115cm) WITHOUT NAP ALL SIZES




SKIRT A

USE PIECES 1 2 3 4 5 8 9 10 11 12 13 14 15 16 17


45" (115cm) WITH NAP SIZES 6 8 10 12 14



45" (115cm) WITH NAP SIZES 16 18 20 22 24

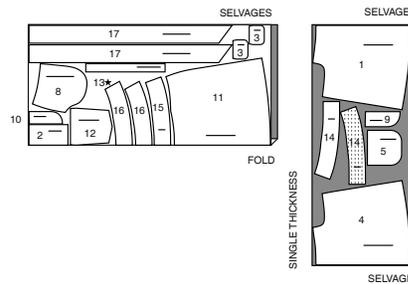


60" (150cm) WITH NAP ALL SIZES



INTERFACING A (FLAP, WAISTBANDS, FLY FACING, FLY)

USE PIECES 3 9 10 14 15 16


20" (51cm) ALL SIZES




SKIRT B

USE PIECES 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23


45" (115cm) WITH NAP SIZES 6 8 10 12 14

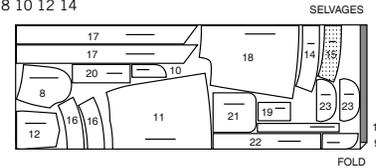

45" (115cm) WITH NAP SIZES 16 18 20 22 24

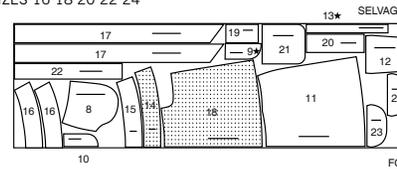


60" (150cm) WITH NAP ALL SIZES



INTERFACING B (FLAP, WAISTBANDS, FLY FACING, FLY)

USE PIECES 9 10 14 15 16 23

20" (51cm) ALL SIZES



CUTTING LAYOUTS CONTINUED ON PAGE 2

General Directions

The Pattern

- SYMBOLS**
- GRAIN LINE: Place on straight grain of fabric parallel to selvage
- PLACE SOLID LINE on fold of fabric.
- CENTER FRONT OR BACK of garment.
- NOTCHES
- DOTS
- CUTTING LINE
- LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
Make adjustments before placing pattern on fabric.

TO LENGTHEN: Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.



TO SHORTEN: At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING: PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.

PIN pattern to fabric as shown in Cutting Layouts.

FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.


FOR SINGLE THICKNESS: Place fabric RIGHT side up.

FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING: Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.




Sewing

- SEW garment following Sewing Directions.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.

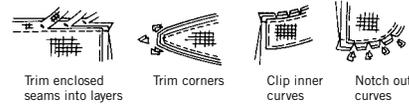


SPECIAL CUTTING NOTES


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.



✱ Mark small arrows along both selvages indicating direction of nap or grain. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).




S9924

2 of 5


SKIRT C

USE PIECES 8 9 10 11 13 14 15 16 17 24 25 26 27


45" (115cm)
WITH NAP
SIZES 6 8 10 12 14

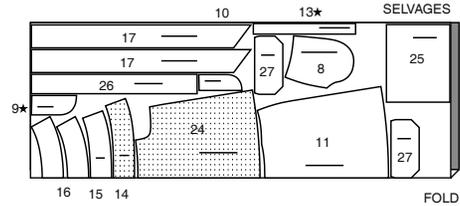

45" (115cm)
WITH NAP
SIZES 16 18 20 22 24

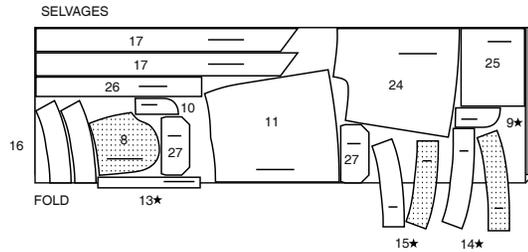


60" (150cm)
WITH NAP
ALL SIZES



INTERFACING C (FLAP, WAISTBANDS, FLY FACING, FLY)

USE PIECES 9 10 14 15 16 27

20" (51cm)
ALL SIZES




SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials

Sewing Directions



Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

DART - see **Darts: "sewing flat dart"** video

EDGE STITCH - see **Machine Stitches: "how to edgestitch"** video.

FINISH - see **Seams: "how to finish seam allowances"** video.

REINFORCE - see **Machine Stitches: "how to reinforce"** video.

STAYSTITCH - see **Machine Stitches: "how to do stay-stitching"** video.

TOPSTITCH - see **Machine Stitches: "how to topstitch"** video.

UNDERSTITCH - see **Machine Stitches: "how to understitch"** video.

SLIPSTITCH - Slide needle through a folded edge, then pick up a thread of underneath fabric.

SKIRT A, B, C

NOTE: Under each sub-heading, the first view will be illustrated, unless otherwise mentioned.

INTERFACING

1. Trim corners from INTERFACING, as shown. Fuse INTERFACING to WRONG side of each matching FABRIC section, following manufacturer's instructions.



FRONT VIEW A

2. Turn in 1/4" (6mm) on upper edge of each RIGHT POCKET (2) section. Press. Turn upper edge to OUTSIDE along foldline, forming a facing. Stitch along seamline on raw edges. Trim seam allowances in the facing area to 1/4 (6mm).

3. Turn corners RIGHT side out, turning facing to the WRONG side. Press, pressing under raw edges along stitching, folding in corners diagonally. Stitch facing close to inner edge.

4. Pin right pocket to RIGHT FRONT (1) matching large dots. **EDGE STITCH** and **TOPSTITCH** sides and lower edges.

5. For each flap, pin one interfaced FLAP (3) section to an interfaced flap section, RIGHT sides together. Stitch sides and lower edges, leaving upper edge open. Trim.

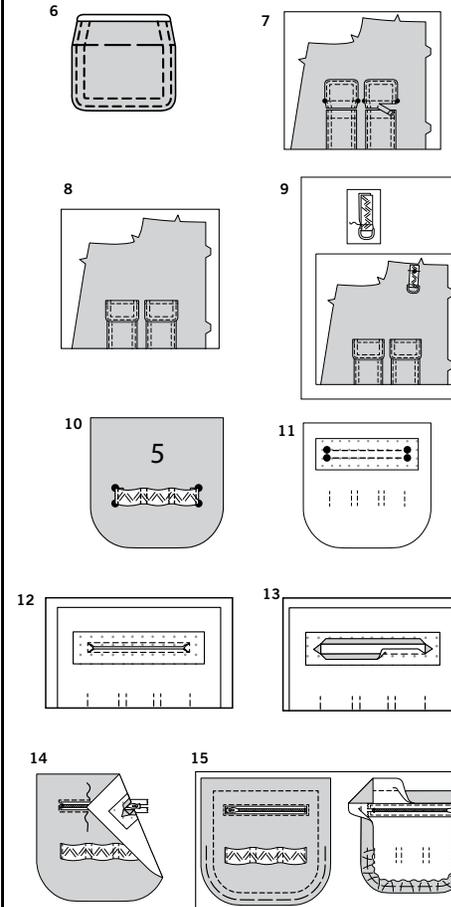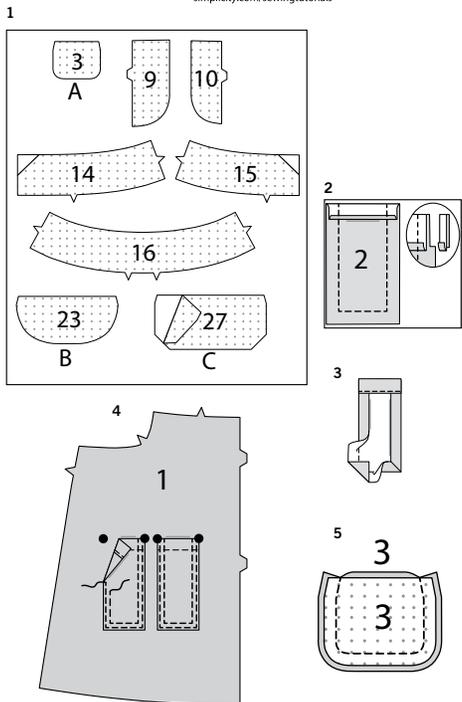

6. Turn right side out. Press. Baste raw edges together. **EDGE STITCH** and **TOPSTITCH** finished edges.

7. Pin flaps to right front, matching small dots, placing seamline along placement line and seam allowance below placement line. Stitch between small dots. Trim flap seam allowance to a scant 1/4" (6mm), being careful not to cut skirt.

8. Turn flap down, press. **TOPSTITCH** upper edge of flap, encasing trimmed edges.

9. Cut a piece of trim 3-3/4" (9.5cm). Insert one end through one D-ring and bring ends together. Baste. Pin ends of trim to upper edge of right front, centering over small dot. Baste.

10. Cut a piece of twill tape using GUIDE FOR TRIM (6). Transfer markings. Turn under 5/8" (1.5cm) on ends of trim. Pin trim to LEFT POCKET (5), RIGHT sides up, matching markings to stitching lines and ends of trim to small dots. Stitch close to ends of trim and along stitching lines.

11. Cut a remnant of fusible interfacing 1-1/2" (3.8cm) wide and 2" (5cm) longer than zipper opening. Pin remnant to wrong side of pocket, centering over zipper opening. Fuse in place following manufacturer's directions. **REINFORCE** pocket along stitching lines, pivoting with needle in fabric at small dots.


12. Slash pocket between stitching, clipping diagonally to corners, being careful not to clip through stitching.

13. Press under opening edges on pocket along stitching.


NOTE: It may become necessary to adjust the length of your zipper. Measure the zipper opening less 1/4" (6mm). Close the zipper and measure from the tab down along the teeth to the length needed. Mark new length. With matching buttonhole twist or heavy duty thread, make several overcast stitches across zipper teeth at marking. Trim away lower end of zipper to within 5/8" (1.5cm) of overcast stitches. Use an adjustable zipper foot to apply zipper.

14. With right sides up, center opening edges of pocket over closed zipper, placing tab end to left side of pocket. Baste pressed opening edges to zipper tape. Stitch close to pressed edges of opening.


15. Stitch along seam lines on left pocket. To ease curved edge of pocket, stitch 1/4" (6mm) from raw edge, inside the seam line, using a long machine-stitch. Press under outer edges of pocket along stitching, folding corners diagonally and pulling up ease stitches to shape the curve.

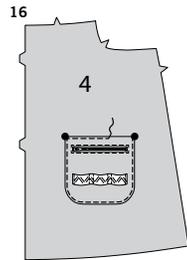

16. Pin pocket to LEFT FRONT (4), RIGHT sides up, matching large dots. **EDGESTITCH** outer edges of pocket.

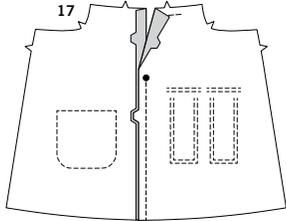


17. Stitch right front and left front together at center front, leaving open above large dot.




VIEW B


18. With RIGHT sides together, fold LOWER STRAP (20) and UPPER STRAP (19) in half lengthwise, having raw edges even. Stitch, leaving marked end open. Trim.




19. Turn right side out. Press. **EDGESTITCH** finished edges. Slip finished edge of upper strap through two D-rings. Fold end of strap along foldline, turning end to underside. Stitch end to underside along stitching line.




20. **STAYSTITCH** long notched edge of GUSSET (22). Pin lower strap to unnotched edge of gusset, matching small dots. Baste.




21. Pin gusset to LOWER POCKET (21), RIGHT sides together, matching notches, large and small dots, clipping gusset to staystitching, where needed. Stitch.




22. Press under 1/4" (6mm) on upper edge of lower pocket. Press under upper edge along foldline. Baste close to inner pressed edge.




23. **TOPSTITCH** along basting.




24. Press gusset to inside. **EDGESTITCH** sides and lower edges of pocket keeping lower strap free.




25. Open out gusset. Press under seam allowance on gusset.

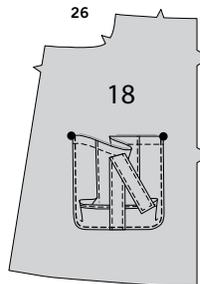


26. Pin pocket to FRONT (18) along pocket placement line, matching large dots on gusset to large dots on front. **EDGESTITCH** pressed edge of gusset, stitching over end of lower strap, as shown.




27. To pleat pocket, on OUTSIDE, bring large dots together, as shown. Press. Pin to hold in place. Stitch a triangle at upper edge of pockets through all layers.




28. Pin an interfaced FLAP (23) to an uninterfaced flap section, RIGHT sides together, having raw edges even. Stitch, leaving upper straight edge open. Trim.




29. Turn RIGHT side out. Press. Baste raw edges together. **TOPSTITCH** finished edge.




30. Pin upper strap to flap, RIGHT sides up, matching small dots at center of flap. Baste.

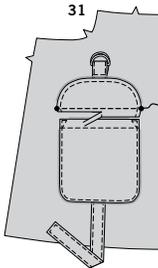


31. Pin flap to front, strap side down, placing seamline along flap placement line and seam allowance below flap line, matching small dots. Stitch between small dots. Trim flap seam allowance to a scant 1/4" (6mm), being careful not to cut front.



32. Turn flap down, press. **TOPSTITCH** upper edge of flap, encasing trimmed edge.

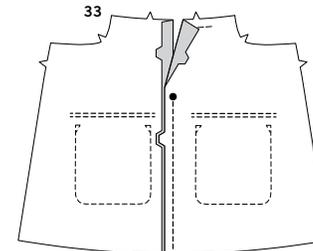


33. Stitch front sections together at center front, leaving open above large dot.

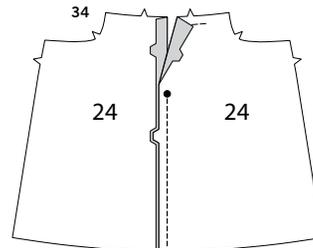


VIEW C

34. Stitch FRONT (24) sections together at center front, leaving open above large dot.





FLY FRONT ZIPPER

35. Clip 3/8" (1cm) into right front seam allowance at large dot. Press seam toward left front below clip.





36. Turn in right front opening edge along foldline; press. Place closed zipper (face up) under right front opening edge, having pressed edge close to zipper teeth and zipper stop at small dot. Using a zipper foot, machine-baste close to pressed edge.




37. Stitch RIGHT FLY (10) sections together along curved edge, using a 3/8" (1cm) seam. Turn right side out. Press. Baste raw edges.

38. On INSIDE, pin right fly to right front opening edge (over zipper), matching notches and small dots, having raw edges even. Baste along previous basting for zipper.





39. On OUTSIDE, using a zipper foot, stitch close to pressed edge of front through all layers.

40. FINISH outer curved edge of LEFT FLY FACING (9). Pin fly facing to left front opening edge, matching notches, and large dots. Stitch, ending at large dot. Trim. UNDERSTITCH fly facing.





41. Turn facing to inside. Press.





42. Lap left front over right, matching centers. Baste close to edge through all thicknesses.

43. Pin right fly out of the way. Open out fly facing. Pin remaining zipper tape to fly facing, keeping left front free. Using a zipper foot, stitch in place along center of zipper tape.



44. Turn facing down. On OUTSIDE, stitch left front along stitching lines, keeping right fly free. Stitch again 1/4" (6mm) away from previous stitching.


45. Turn right fly back in place. On INSIDE, hand tack fly and facing together at lower edge, as shown. Trim away excess zipper tape even with lower edge of fly, if needed

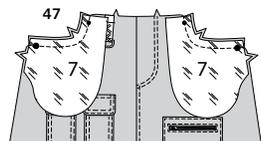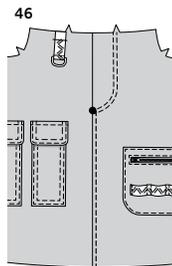


46. TOPSTITCH left front below zipper stitching.

POCKET AND SIDE FRONT


47. Stitch POCKET (7) to upper side edge of front matching large and small dots. Trim.

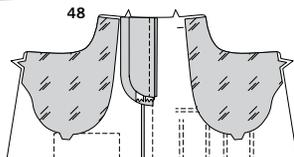


48. Turn pocket to INSIDE. Press.

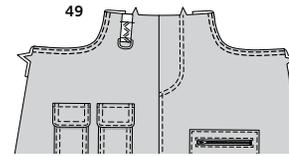

49. EDGESTITCH and TOPSTITCH upper side edge of front.




50. Pin front to SIDE FRONT AND POCKET (8) matching notches. Stitch outer edges together, keeping front free.




51. Baste upper and side edges, matching small and large dots.

BACK




52. Stitch DARTS in BACK (11). Press dart toward center. Stitch back to fronts at sides.



VIEWS A, B



53. Turn in 1/4" (6mm) on upper edge of BACK POCKET (12). Turn upper edge to OUTSIDE along foldline, forming a facing. Stitch along seamline on raw edges. Trim seam allowances in the facing area to 1/4" (6mm).

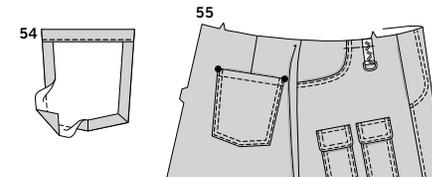

54. Turn corners right side out, turning facing to the WRONG side. Press, pressing under raw edges along stitching, folding in corners diagonally. Stitch facing close to inner edge.



55. Pin back pocket to back matching large dots. EDGESTITCH and TOPSTITCH sides and lower edges.

VIEW C





56. To make pleats on LOWER POCKET (25), on OUTSIDE, crease on the two center lines of small dots with WRONG sides together. On OUTSIDE, bring folds to outer lines of small dots. Baste. Baste upper and lower edges.

57. REINFORCE side edges of GUSSET (26) through small dots, as shown. Clip to small dots.



58. With RIGHT sides together, pin gusset to pocket at sides and lower edges, matching notches, large and small dots. Stitch, pivoting at small dots.


59. Press under 1/4" (6mm) on upper edge of pocket.




60. Turn upper edge to INSIDE along foldline. Baste close to inner pressed edge.

61. TOPSTITCH along basting.

62




63




62. Turn gusset to INSIDE. Press. **EDGESTITCH** side and lower edges of pocket.

63. Turn in seam allowance on side and lower edges of gusset. Press.

64



65



64. Pin pocket to front and back of skirt over side seam, along placement line, matching large dots on gusset to large dots on skirt. **EDGESTITCH** side and lower edges of gusset. Remove pleat basting.


65. To pleat pocket, on OUTSIDE, bring large dots together, as shown. Press. Pin to hold in place. Stitch a triangle at upper edge of pockets through all layers.

66. For each flap, pin one interfaced FLAP (27) section to an uninterfaced flap section, RIGHT sides together. Stitch sides and lower edges, leaving upper edge open. Trim.

67. Turn right side out. Press. Baste raw edges together. **TOPSTITCH** finished edges. Make buttonholes in flap at markings.

66


27



67




68




68. Pin flaps to skirt front and back, matching small dots, placing seamline along placement line and seam allowance below placement line. Stitch between small dots. Trim flap seam allowance to a scant 1/4" (6mm), being careful not to cut skirt.

69

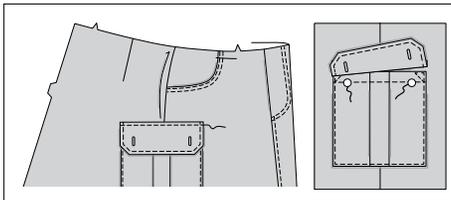


69. Turn flap down, press. **TOPSTITCH** upper edge of flap, encasing trimmed edges. Sew button to pocket under buttonhole.

70



71



CONTINUE AS FOLLOWS FOR VIEWS A, B, C

70. Stitch center back seam. Press seam toward right back.

71. **TOPSTITCH** right back.

WAISTBAND

72. Fold CARRIER (13) in half, lengthwise with WRONG sides together. Press.


73. Open out long edges of carrier and turn them to WRONG side so that they meet at the crease. Press.

72


13



73




74



74. Fold carrier in half lengthwise, bringing pressed edges together. Stitch close to both long edges. Cut four sections from carrier, each 3-1/2" (9cm) long.

75



75. On OUTSIDE, pin one end of carriers to skirt, centered over large dots, with raw edges even. Stitch across carries at dots and again 1/4" (6mm) below first stitching.

NOTE: Interfaced waistbands will be use as facings.

76. Stitch RIGHT WAISTBAND (14) and LEFT WAISTBAND (15) to side edges of BACK WAISTBAND (16).

77. Pin waistband to upper edge of skirt, matching centers, seams, notches, and small dots. Stitch. Trim. Press seam toward waistband.

78. Stitch waistband FACING sections together in same manner as waistband. Press under 1/2" (1.3cm) on lower edge of facing. Trim pressed edge to 3/8" (1cm).

79. Pin facing to waistband, matching centers and seams. Stitch upper and front edges. Trim.

80. Turn waistband to INSIDE. Press. Pin pressed edge of facing over seam, placing pins on the outside of band. On OUTSIDE, stitch waistband "in the ditch" of seam, catching in pressed edge of facing on the inside.

81. **EDGESTITCH** waistband, keeping carriers free. Press under 3/8" (1cm) on loose ends of carriers. Turn each carrier up and pin pressed end over large dot, even with upper edge of waistband. Stitch carrier to waistband close to pressed end.

FINISHING

82. Make buttonhole in left opening edge of waistband at marking. Sew button to right opening edge waistband at marking.

83. Turn up 1-1/2" (3.8cm) hem on lower edge of skirt. Baste close to fold. Trim hem to an even width. Turn under 1/4" (6mm) on raw edge. Press. Baste close to upper pressed edge. **TOPSTITCH** hem in place along upper basting.



OPTIONAL TIE BELT

84. For each belt section, stitch two BELT (17) sections together along notched end.


85. With RIGHT sides together, pin belt sections together. Stitch, leaving an opening for turning.

86. Turn. Press. **SLIPSTITCH** opening. **TOPSTITCH** belt.


76



78




79




80




81




82




83




84




85



86





Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
[@simplicity_creative_group](#) and [#simplicitypatterns](#)
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.